

120 Watt - LDAD120W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING



120W
 LDAD120W Series
 DIMMING

Model: LDAD120W Series

- Drive Mode: Constant Current or Constant Voltage
- Technology: PFC Corrected 2-Stage Switch Mode
- Output Power: 120W Max.
- Input Voltage: 90 to 305VAC, 50/60Hz, 108-250VDC
- Number of Outputs: One
- Output Voltages: 8VDC - 343VDC
- Output Currents: 350mA - 5000mA
- Optional 0-10V or PWM Positive Dimming 10% ~ 100%

Environmental

1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. UL Type TL (Tref Max/Meas. Tref): 90/82°C
3. Storage temperature range: -40 to +85°C
4. Humidity (non-condensing): 5% - 95%RH
5. Cooling: Convection
6. Vibration Frequency: 5-55Hz/2g, 30 minutes
7. Impact resistance: 1g/s
8. MTBF@ 40°C: 280,000 hours @ Full Load per MIL-217F Notice 2.



Safety and Compliance

1. UL8750, EN61347, CSA 22.2, UL Type TL & HL recognized.
2. FCC, 47CFR Part 15 Class B certified
3. Water resistant and Dust Proof Design: IP66, NEMA6, for Dry, Damp, Wet Locations.
4. Compact Miniature, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV/4kV 8/20 μsec surge protection.

Electrical Specifications at 25°C

- Input voltage range: 90 to 305VAC or 108-250VDC
- Frequency: 47 - 63Hz or 0Hz (DC)
- Power Factor: ≥ 0.90 at > 70% Load, 120Vac/230Vac/277Vac 50/60Hz
- THD%: ≤ 20% at > 70% Load, 120Vac/230Vac/277Vac 50/60Hz
- Inrush current: <30A at 25C, 277Vac, cold start, Full Load
- Input current: 0.6A Max @ 230Vac, 1.1A Max @ 120Vac, Full Load
- Efficiency: Up to 92% typical at 230Vac Full Load
- Line regulation accuracy: ± 3%
- Load regulation accuracy: ± 4%
- Leakage current: 600uA typical; Hold up time: half cycle

Constant Current Versions



IP66



Part Number ⁽²⁾	UL Types	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LDAD120W-343-C0350	TL & HL	114 - 343 VDC	350 mA	± 5%	120W	92%
LDAD120W-266-C0450	TL & HL	89 - 266 VDC	450 mA	± 5%	120W	92%
LDAD120W-171-C0700	TL & HL	57 - 171 VDC	700 mA	± 5%	120W	90%
LDAD120W-114-C1050	TL & HL	38 - 114 VDC	1050 mA	± 5%	120W	90%
LDAD120W-86-C1400	TL & HL	29 - 86 VDC	1400 mA	± 5%	120W	90%
LDAD120W-68-C1750	TL & HL	23 - 68 VDC	1750 mA	± 5%	120W	89%
LDAD120W-57-C2100	TL & HL	19 - 57 VDC	2100 mA	± 5%	120W	89%
LDAD120W-49-C2450	TL & HL	17 - 49 VDC	2450 mA	± 5%	120W	89%
LDAD120W-43-C2800	TL & HL	15 - 43 VDC	2800 mA	± 5%	120W	88%
LDAD120W-38-C3150	TL & HL	13 - 38 VDC	3150 mA	± 5%	120W	88%
LDAD120W-34-C3500	TL & HL	12 - 34 VDC	3500 mA	± 5%	120W	88%
LDAD120W-28-C4200	TL & HL	10 - 28 VDC	4200 mA	± 5%	120W	87%
LDAD120W-24-C5000 ⁽⁵⁾	TL & HL	8 - 24 VDC	5000 mA	± 5%	120W	87%

Notes

1. Typical efficiency measured at 230VAC input, full load
2. For dimmable versions add appropriate designator to the end of the part number: For Example: LDAD120W-24-C5000-RD is 0-10V dimmable version, LDAD120W-24-C5000-PD is PWM dimmable version.
 -RD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.
 -PD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
3. -RD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 3 for details.
4. -PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5kHz, 0-10V Pulse. See page 4 for details.
5. SAM Recognized.

120W

LDAD120W Series

DIMMING



LED Optimized Drivers

120 Watt - LDAD120W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING



Constant Voltage Versions

Part Number	UL Types	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LD120W-343	TL & HL	343 VDC	88 - 350 mA	± 5%	120W	92%
LD120W-266	TL & HL	266 VDC	113 - 450 mA	± 5%	120W	92%
LD120W-171	TL & HL	171 VDC	175 - 700 mA	± 5%	120W	91%
LD120W-114	TL & HL	114 VDC	263 - 1050 mA	± 5%	120W	91%
LD120W-86	TL & HL	86 VDC	350 - 1400 mA	± 5%	120W	91%
LD120W-68	TL & HL	68 VDC	438 - 1750 mA	± 5%	120W	91%
LD120W-57	TL & HL	57 VDC	525 - 2100 mA	± 5%	120W	90%
LD120W-49	TL & HL	49 VDC	613 - 2450 mA	± 5%	120W	90%
LD120W-43	TL & HL	43 VDC	700 - 2800 mA	± 5%	120W	90%
LD120W-38	TL & HL	38 VDC	788 - 3150 mA	± 5%	120W	90%
LD120W-34	TL & HL	34 VDC	875 - 3500 mA	± 5%	120W	89%
LD120W-28	TL & HL	28 VDC	1050 - 4200 mA	± 5%	120W	89%
LD120W-24 ⁽⁵⁾	TL & HL	24 VDC	1250 - 5000 mA	± 5%	120W	89%

Mechanical Dimensions: Inches [mm]

Material: Black Aluminum Housing
 Fully Encapsulated
 Weight: 690 grams (24.4 oz) Typical

Labeling Example

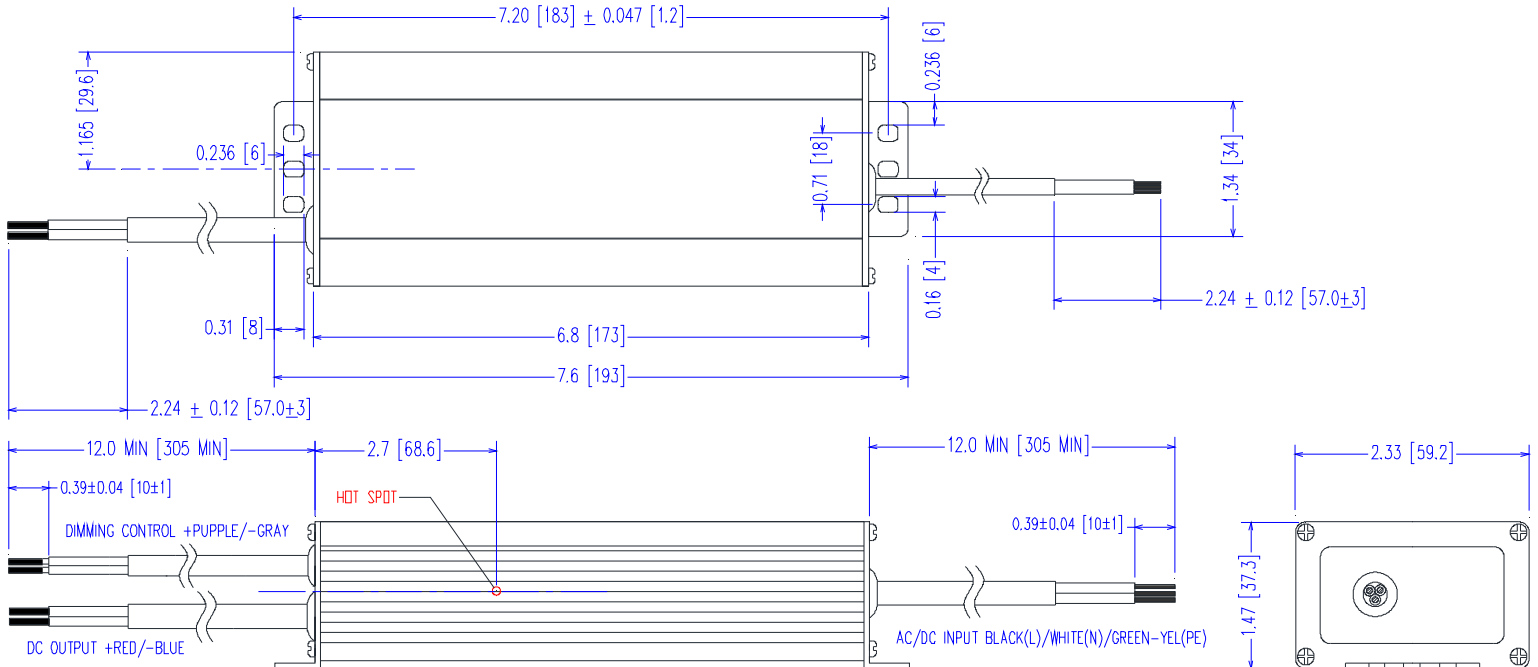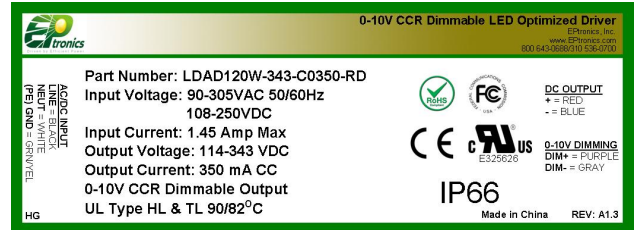

120 Watt - LDAD120W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

120W
 LDAD120W Series
 DIMMING


-RD 2-Wire 0-10V CCR Dimming Scheme

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	—	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Sink Current into 0-10V Purple Wire	0mA	—	1.2mA


Notes

- RD 0-10V dimmable version comes with an extra two wires +Purple/-Grey on the output side.
- RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal.
Recommended wall slide dimmer is Leviton IP710 or equivalent
- RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
- RD 0-10V dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.


-RD 2-Wire Resistance Dimming Scheme

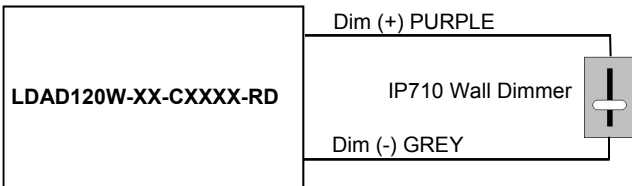

-RD 2-Wire 0-10V Analog Dimming Scheme

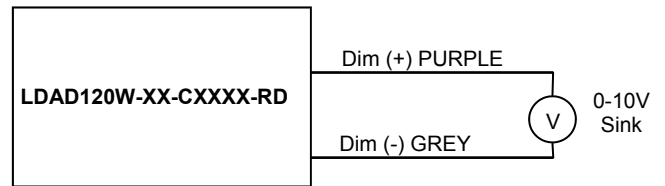

% Output Current vs. 0-10VDC Dimming Input

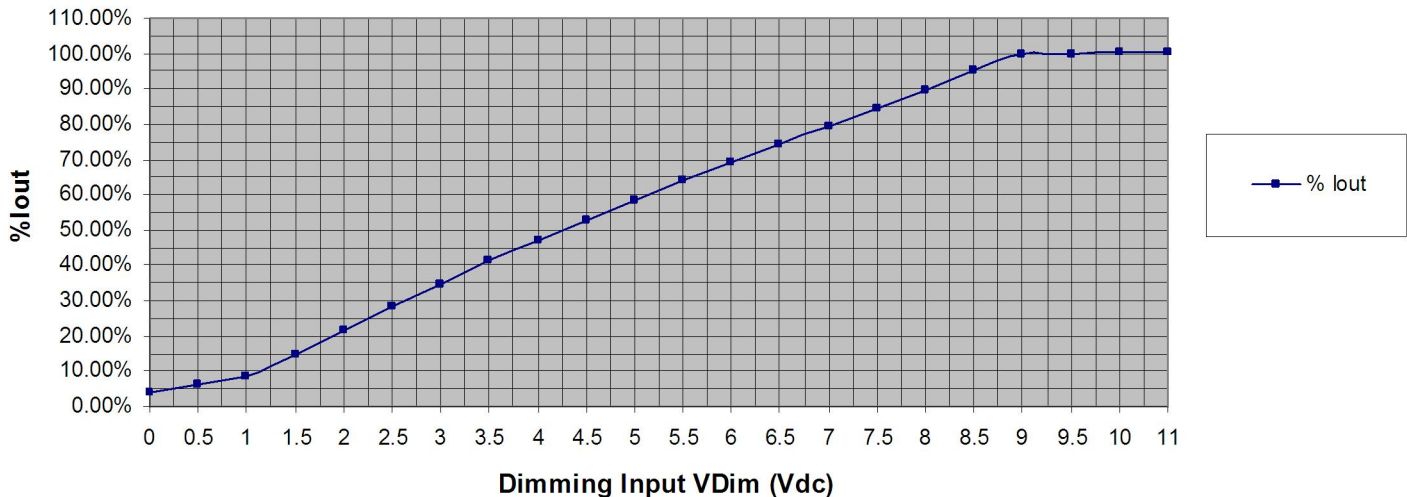

120 Watt - LDAD120W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


-PD 2-Wire CCR PWM Positive Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0V	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0V	10V	+15V
Current into PWM Input (Purple Wire)	0mA	—	1.2mA
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%

Notes

1. -PD PWM Dimmable version comes with an extra 2 wires +Purple/-Grey on the output side.
2. -PD PWM Dimmable version is not intended to dim below about 5% @ 0% Duty Cycle or 10% @ 10% Duty Cycle
3. -PD PWM dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.

-PD 2-Wire PWM Positive Dimming Scheme

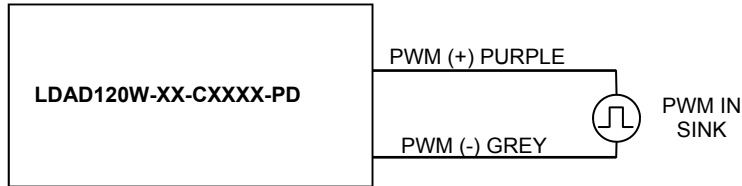

% Output Current vs. 1.0 kHz, Positive Duty Cycle Dimming Input

