

## 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING



DIMMING  
LN30W Series  
**30W**

### Model: LN30W Series

- Drive Mode: Constant Current or Constant Voltage
- Technology: PFC Off-Line Switch Mode
- Output Power: 30W Max.
- Input Voltage: 90 to 305VAC, 47- 63Hz
- Output Voltages: 6VDC - 85VDC
- Output Currents: 300mA - 1000mA
- 0-10V Dimming 5% - 100%
- UL Type HL Rated for Hazardous Locations

### Environmental


1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 25°C: 492,000 hours @ Full Load per MIL-217F Notice 2.

### Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety recognized, UL Type HL
2. FCC, 47CFR Part 15 Class B & EN55015 compliant.
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp, Wet Locations.
4. Compact, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV L-N, 8/20 µsec surge protection.

### Electrical Specifications at 25°C

- Input voltage range: 90 to 305VAC
- Frequency: 47- 63HZ
- Power Factor:  $\geq 0.90$  at  $\geq 60\%$  Load, 120Vac/230Vac,  $\geq 80\%$  Load 277Vac
- THD%:  $\leq 20\%$  at  $\geq 60\%$  Load, 120Vac/230Vac,  $\geq 80\%$  Load 277Vac
- Inrush current: <60A at 25C, 277Vac, cold start, Full Load
- Input current: 0.31A at 120Vac, 60Hz, Full Load
- Efficiency: 88% typical at 230Vac Full Load
- Line regulation accuracy:  $\pm 3\%$
- Load regulation accuracy:  $\pm 3\%$
- Leakage current: 500uA typical; Hold up time: half cycle



IP66



### Standard Part Numbers

Part Number <sup>(2)</sup>	US Class 2	CN Class 2	UL Types	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency <sup>(1)</sup>
LN30W-85-C0350-RD	NO	NO	HL	43 - 85 VDC	350 mA	$\pm 5\%$	30W	89%
LN30W-75-C0400-RD	NO	NO	HL	38 - 75 VDC	400 mA	$\pm 5\%$	30W	88%
LN30W-66-C0450-RD	NO	NO	HL	33 - 66 VDC	450 mA	$\pm 5\%$	30W	88%
LN30W-56-C0560-RD	YES	YES	HL	28 - 56 VDC	560 mA	$\pm 5\%$	30W	88%
LN30W-42-C0700-RD	YES	YES	HL	21 - 42 VDC	700 mA	$\pm 5\%$	30W	87%
LN30W-36-C0830-RD	YES	YES	HL	18 - 36 VDC	830 mA	$\pm 5\%$	30W	86%
LN30W-24-C1250-RD	YES	YES	HL	12 - 24 VDC	1250 mA	$\pm 5\%$	30W	85%
LN30W-18-C1660-RD	YES	YES	HL	9 - 18 VDC	1660 mA	$\pm 5\%$	30W	85%
LN30W-12-C2500-RD	YES	YES	HL	6 - 12 VDC	2500 mA	$\pm 5\%$	30W	84%

### Notes

1. Typical efficiency measured at 230VAC input, full load
2. 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V sink analog signal. See page 3 for details.

30W

LN30W Series

DIMMING



LED Optimized Drivers

# 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING

### Constant Voltage Versions

Part Number	US Class 2	CN Class 2	UL Types	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency <sup>(1)</sup>
LN30W-85	NO	NO	HL	85 VDC	88 - 350 mA	± 5%	30W	89%
LN30W-75	NO	NO	HL	75 VDC	100 - 400 mA	± 5%	30W	88%
LN30W-66	NO	NO	HL	66 VDC	113 - 450 mA	± 5%	30W	88%
LN30W-56	YES	YES	HL	54 VDC	140 - 560 mA	± 5%	30W	88%
LN30W-42	YES	YES	HL	42 VDC	175 - 700 mA	± 5%	30W	87%
LN30W-36	YES	YES	HL	36 VDC	208 - 830 mA	± 5%	30W	86%
LN30W-24	YES	YES	HL	24 VDC	313 - 1250 mA	± 5%	30W	85%
LN30W-18	YES	YES	HL	18 VDC	415 - 1660 mA	± 5%	30W	85%
LN30W-12	YES	YES	HL	12 VDC	625 - 2500 mA	± 5%	30W	84%

### Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case  
 Fully Encapsulated  
 Weight: 233 grams (8.2 oz) Typical

### Labeling Example

AC INPUT  
L = BLACK  
N = WHITE

**30 Watt - LN30W Series**

7-10 Dimmable LED Optimized Driver  
EPtronics, Inc.  
www.EPtronics.com  
800 643-0688/310 536-0700


Part Number: LN30W-36-C0830-RD  
 Input Voltage: 90-305VAC 50/60Hz  
 Input Current: 0.51 Amp Max  
 Output Voltage: 18-36 VDC  
 Output Current: 830 mA CC  
 0-10V CCR Dimmable Output  
 UL & cUL Class 2 Output, UL Type HL

CE  
 cUL US  
 E323626  
 IP66  
 Made in China REV A

DC OUTPUT  
+ = RED  
- = BLUE

0-10V Dim  
DIM+ = PURPLE  
DIM- = GRAY

FC  
 RoHS  
 HG

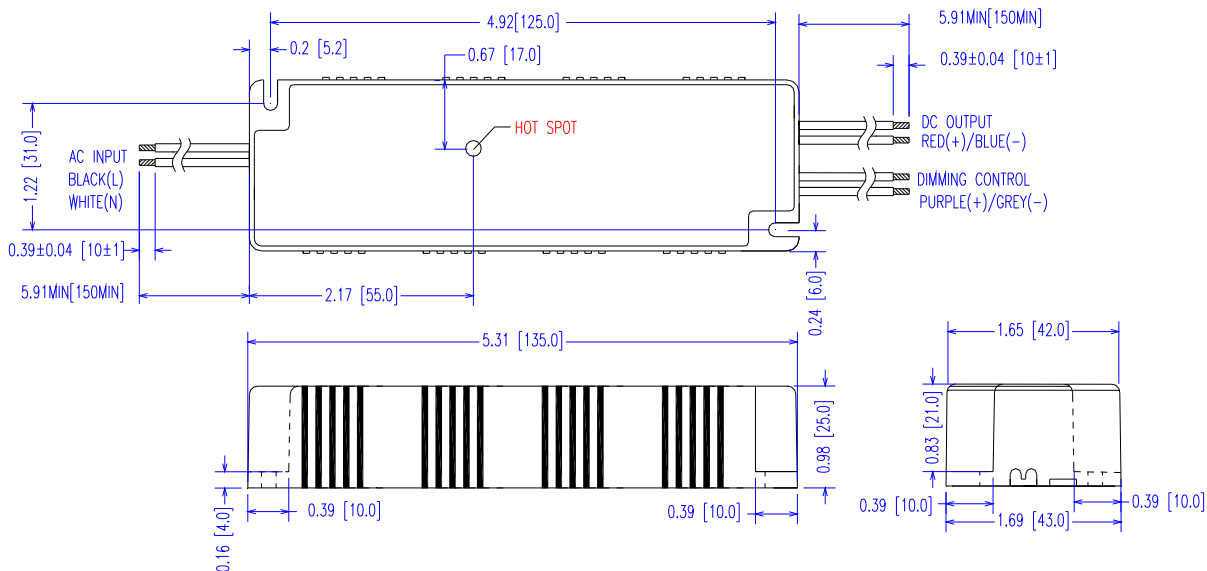

## 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING


### -RD, 0-10V Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Voltage Range on 0-10V Input (Purple Wire)	-2.0V	—	+15V
Source Current out of 0-10V Input (Purple Wire)	0mA	—	2mA


### Notes

- RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended dimmer is Leviton IP710 or equivalent connected between Purple and Gray wires. Yellow is not used for dimming.
- RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
- RD 0-10V dimmable version output will be 100% with Purple/Gray open and minimum with Purple/Gray Shorted.


### -RD, 0-10V Slide Dimming Scheme

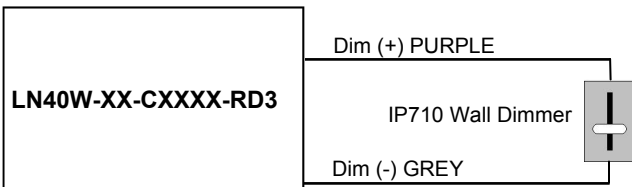

### -RD, 0-10V Analog Dimming Scheme

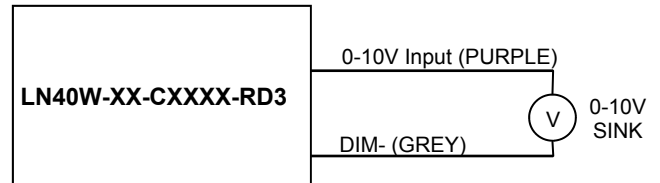

**% Output Current Vs. 0-10V DC Dimming Input**

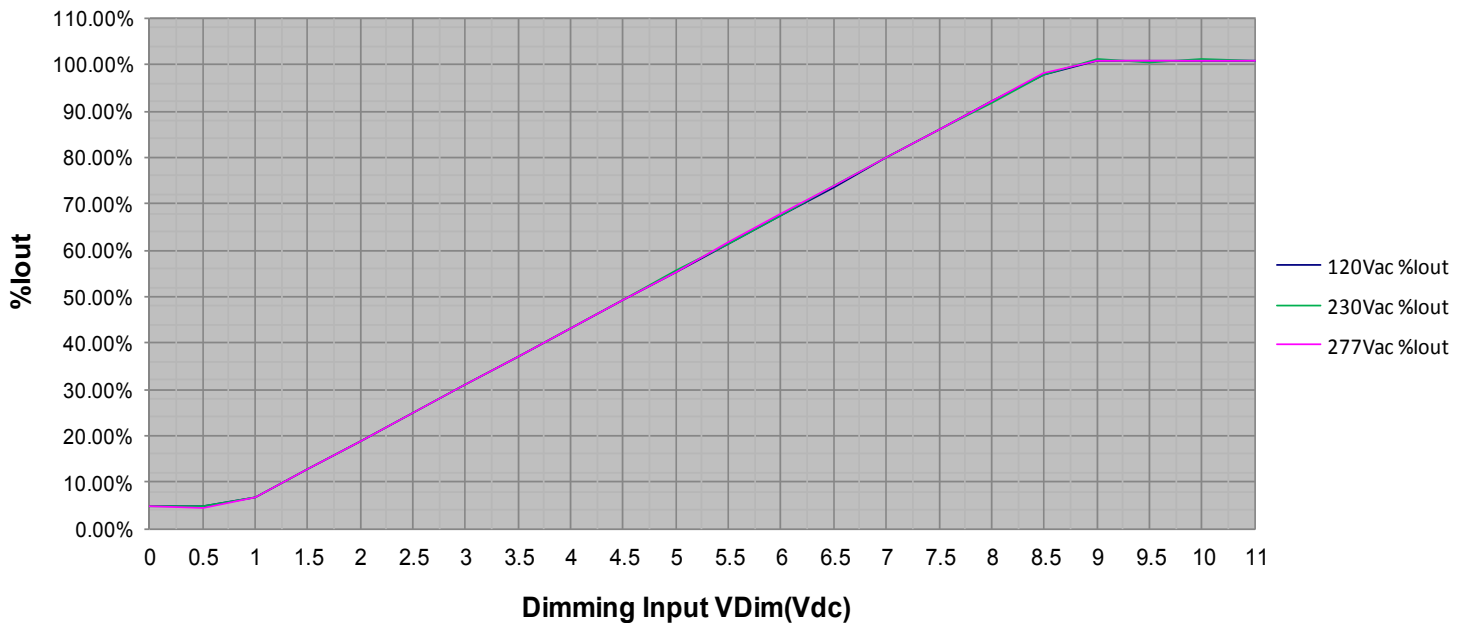

# 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING

## Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	90 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.31 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.16 A	Measured at 230Vac/50Hz Input, Output Full load.
	—	—	0.14 A	Measured at 277Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	—	60A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% I <sub>peak</sub> duration $\approx$ 140 $\mu$ sec (1/2*I <sub>p</sub> <sup>2</sup> *t)
Inrush Current (I <sup>2</sup> t)	—	—	0.25 A <sup>2</sup> s	
Leakage Current	—	—	0.28mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at $\geq$ 60% Load, 120Vac/230Vac, $\geq$ 80% Load 277Vac
Power Factor (PF)	0.90	—	—	Measured at $\geq$ 60% Load, 120Vac/230Vac, $\geq$ 80% Load 277Vac

## Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 1
DC Output Constant Current	-5%	Per Table	+5%	Per Tables on Page 1
Output Power	—	—	Per Table	Per Tables on Page 1
Ripple & Noise (V <sub>pk-pk</sub> )	—	—	20% V <sub>o</sub>	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic.
Ripple (I <sub>pk-pk</sub> )	—	—	50% I <sub>o</sub>	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic. 120 Hz component (Flicker Free)
Start-up Time	—	200 ms	700 ms	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	30 mS	—	Typical @ 277Vac Input, Output Full load.

## Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (T <sub>c</sub> )	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (T <sub>a</sub> )	-30 °C	—	+60 °C	This is a reference range. T <sub>c</sub> controls temperature range.
Storage Temperature (T <sub>s</sub> )	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	492,000 Hours	—	—	MIL-HDBK-217F Notice 2, T <sub>a</sub> = 25C, Output Full Load.

## Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% I <sub>o</sub>	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% V <sub>o</sub>	No Damage, Auto recovery after fault is removed.

## 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING


### Safety Recognized

Safety	Notes/Standards
UL/CUL	UL8750 & CAN/CSA C22.2 No. 250.13, UL Type HL
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
Dimming & Aux Circuit	+12V Yellow/Dim+ Purple/Dim- Gray are considered part of the secondary circuit.

### EMC Certified

Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

### Power Factor Curves (Typical)

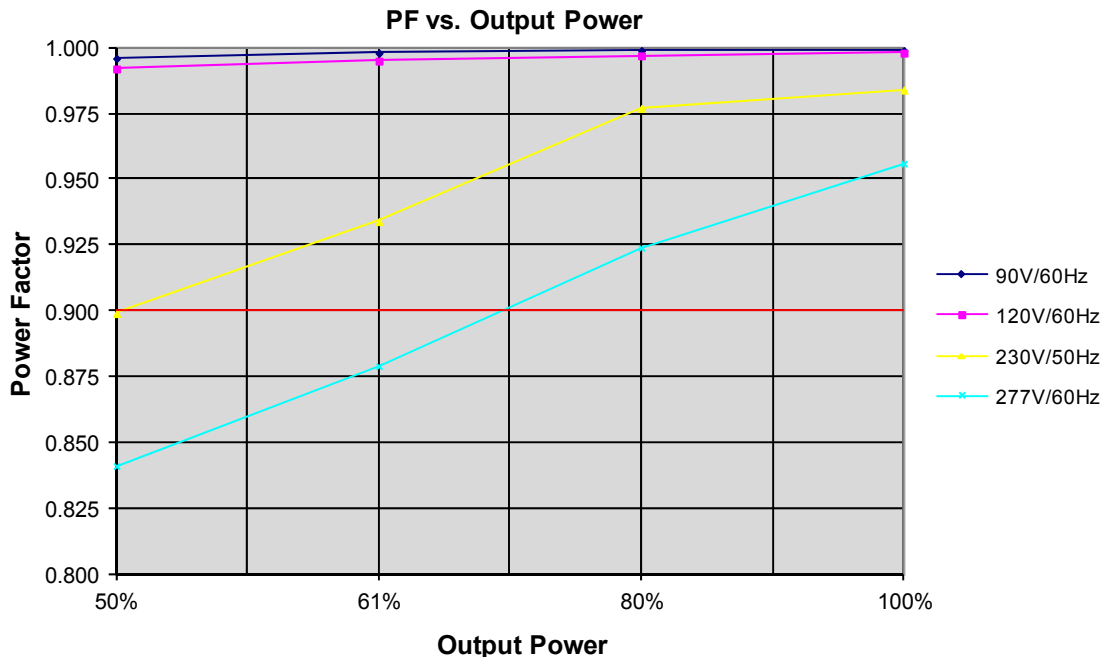

30W

LN30W Series

DIMMING




LED Optimized Drivers

# 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING


## THD Curves (Typical)

### THD vs. Output Power

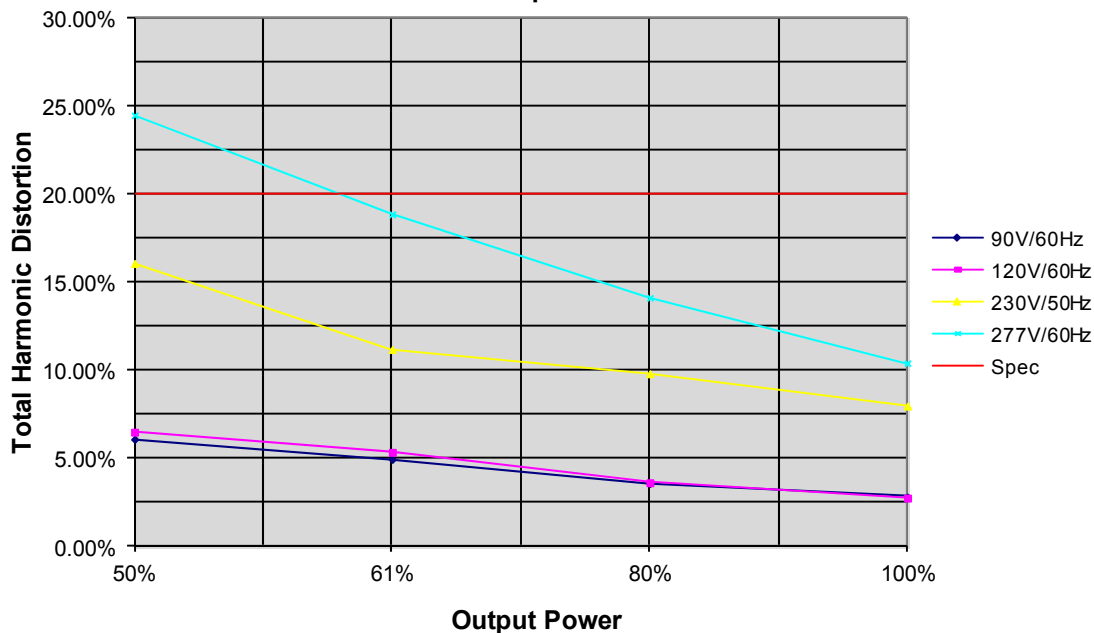

## Efficiency Curves (Typical)


### Efficiency vs. Output Power

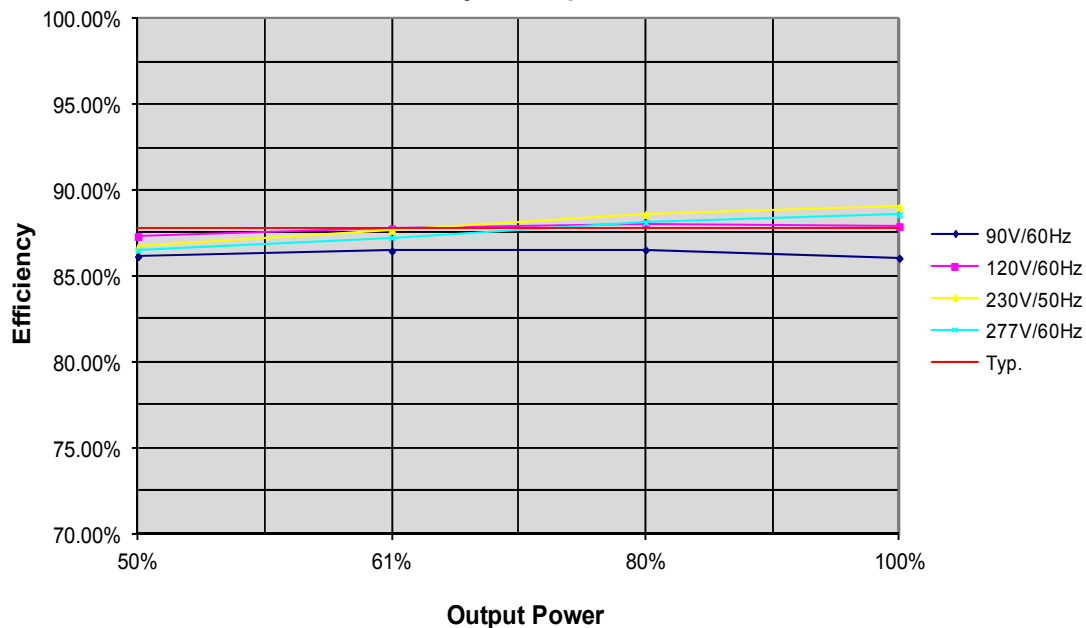


# 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING

## Life vs. Ambient Temperature

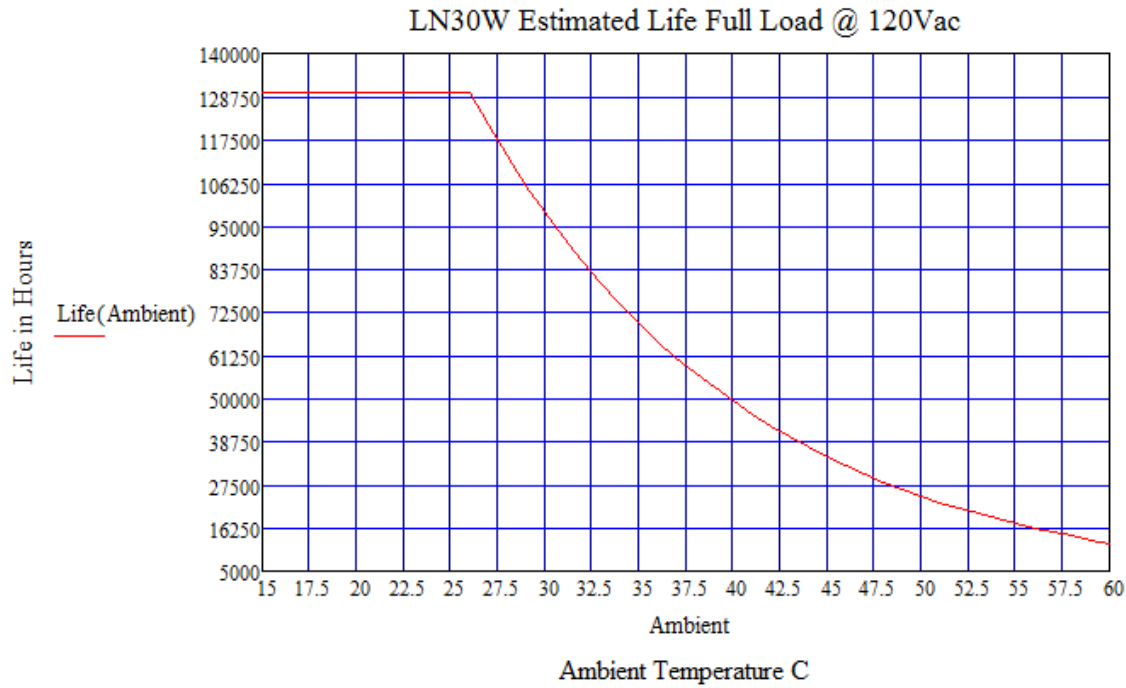

## Life vs. Case (Tc) Temperature

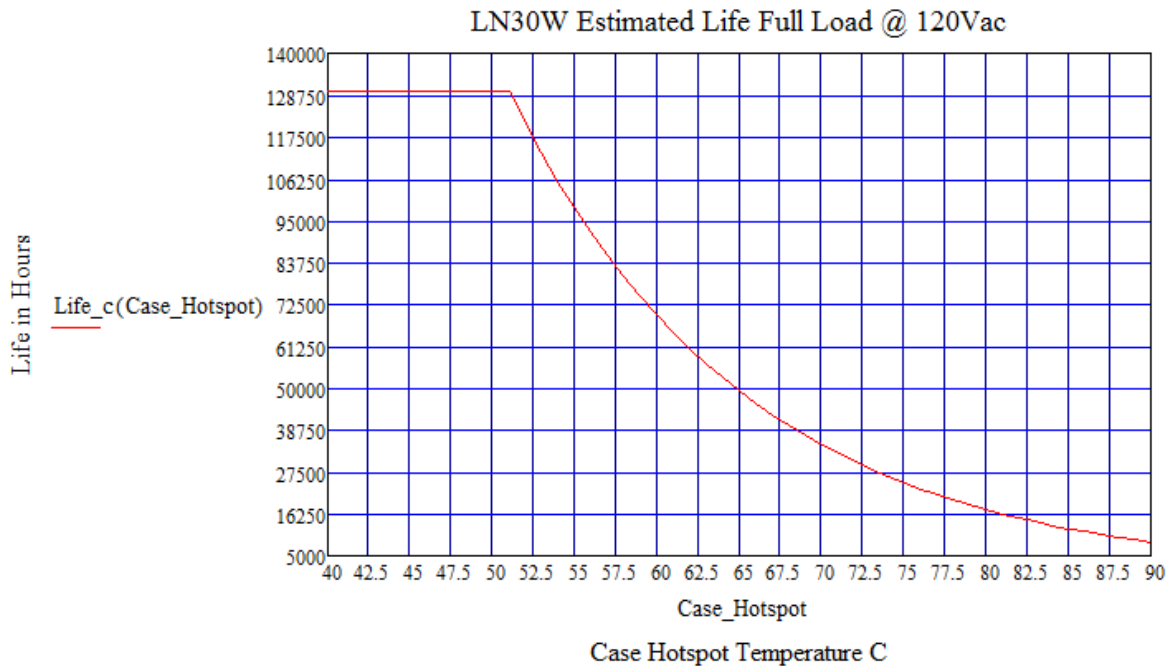

**30W**

**LN30W Series**

**DIMMING**



**LED Optimized Drivers**

# 30 Watt - LN30W Series

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING

