



## 40 WATT LD40WXXX -TL

CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS

### Model: LD40WXXX -TL Series

- Designed for use with Triac or ELV Phase Dimmers 120Vac or 230Vac/240Vac.
- 120Vac Version can be used without dimmer 120/208-277Vac
- Drive Mode: PFC Corrected
- Output Power: 40W Max.
- Input Voltage: 120 or 208-277VAC, 50/60Hz
- Number of Outputs: One
- Output Voltages: 15VDC - 114VDC
- Output Currents: 350mA - 1670mA

### Environmental


1. Operating temperature: Tc 85C Maximum. Reference -30 to +50°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 40°C: 375,000 hours @ Full Load per MIL-217F Notice 2.

### Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety recognized, UL Type HL
2. FCC, 47CFR Part 15 Class B certified
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp, Wet Locations.
4. Compact, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery
8. EN61000-4-5: 2kV surge protection.

### Electrical Specifications at 25°C

- Input Voltage: 120Vac Version 120Vac, 230Vac Version 208-277Vac
- Frequency: 50/60HZ
- Power Factor: > 0.90 at Rated Vac, Full Load (No dimmer)
- THD: <20% at Rated Vac, Full Load (No dimmer)
- Start-up Time: <1.0 Seconds Full Load (No dimmer)
- Inrush current: ≤30A at 25C, 277Vac, cold start, Max. Load
- Input current: ≤0.34A at 120Vac, 60Hz, Maximum Load
- Line regulation accuracy: ± 3%
- Load regulation accuracy: ± 5%
- Dimming Range: CCR Mode See Graph page 2.



IP66



### 120Vac Input Versions

Part Number(1)	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency (3)	DIMMER(5)
LD40W120-114-C0350-TL	NO	NO	72 - 114 VDC	350 mA	± 5%	40W	85%	Incan & ELV
LD40W120-54-C0700-TL	YES	YES	34 - 54 VDC	700 mA	± 5%	40W	85%	Incan & ELV
LD40W120-40-C1000-TL	YES	YES	25 - 40 VDC	1000 mA	± 5%	40W	84%	Incan & ELV
LD40W120-36-C1100-TL	YES	YES	22 - 36 VDC	1100 mA	± 5%	40W	84%	Incan & ELV
LD40W120-30-C1300-TL	YES	YES	19 - 30 VDC	1300 mA	± 5%	40W	83%	Incan & ELV
LD40W120-24-C1670-TL	YES	YES	15 - 24 VDC	1670 mA	± 5%	40W	82%	Incan & ELV

1. LD40W120, 120Vac Version can be used without dimmer at 120Vac or 208-277Vac.

### 230Vac Input Versions

Part Number	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency (3)	DIMMER(6)
LD40W230-114-C0350-TL	NO	NO	72 - 114 VDC	350 mA	± 5%	40W	86%	Incan & ELV
LD40W230-54-C0700-TL	YES	YES	34 - 54 VDC	700 mA	± 5%	40W	86%	Incan & ELV
LD40W230-40-C1000-TL	YES	YES	25 - 40 VDC	1000 mA	± 5%	40W	85%	Incan & ELV
LD40W230-36-C1100-TL	YES	YES	22 - 36 VDC	1100 mA	± 5%	40W	85%	Incan & ELV
LD40W230-30-C1300-TL	YES	YES	19 - 30 VDC	1300 mA	± 5%	40W	84%	Incan & ELV
LD40W230-24-C1670-TL	YES	YES	15 - 24 VDC	1670 mA	± 5%	40W	83%	Incan & ELV

### Notes

3. Typical efficiency measured at 120Vac or 230Vac input, full load, no dimmer.
4. All versions are ≤10% to ~100% CCR Dimmable with any good quality proper power phase dimmer.
5. Use any good quality 120VAC ≤600W Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.
6. Use any good quality 230/240VAC ≤500W Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.


Custom designs available. Please consult the factory.

Specifications subject to change without notice

**40 WATT LD40WXXX -TL**  
CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS


**Typical Dimming Curve:**

**%Output Current vs. Conduction Angle in Degrees**

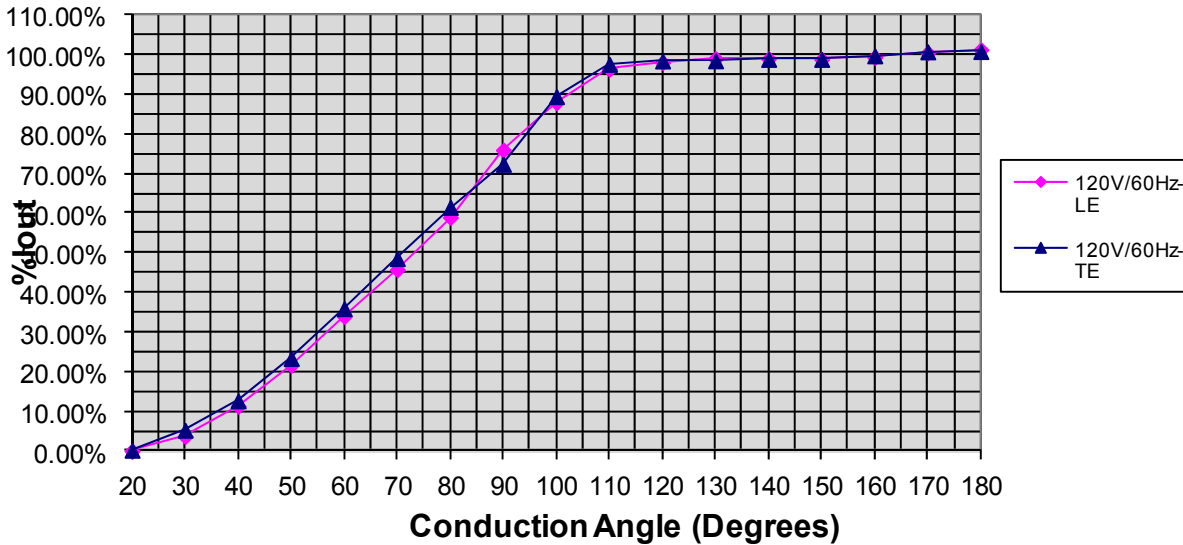

**Mechanical Dimensions: Inches [mm]**

Material: Black PC ABS Plastic Case  
Fully Encapsulated  
Weight: 311 grams (11.0 oz) Typical

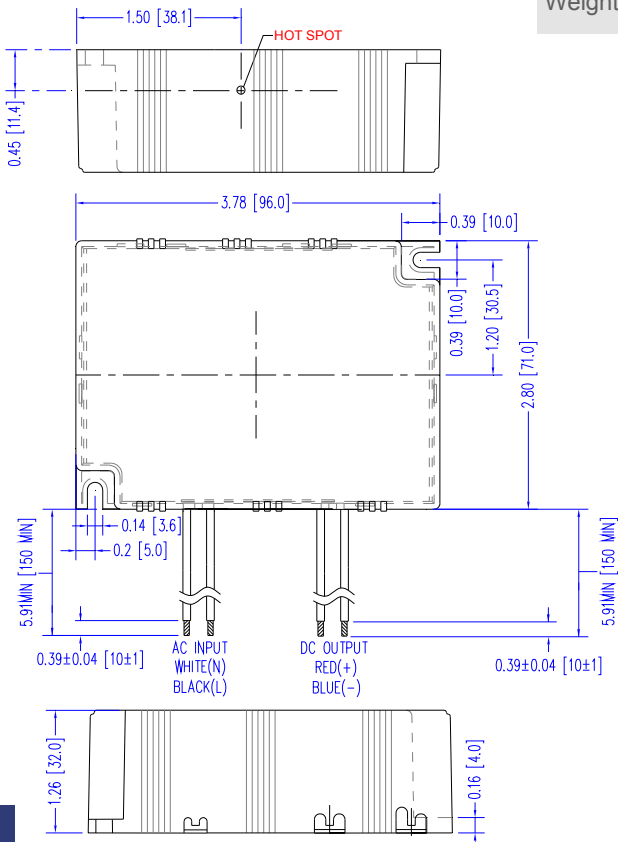

**Labeling Example**

DC Output + = RED - = BLUE		LED Optimized Driver EPtronics, Inc. www.EPtronics.com 800 643-0688/310 536-0700	AC Input L = BLACK N = WHITE
Part Number: LD40W120-54-C0700-TL Input Voltage: 120 VAC 50/60 Hz Input Current: 0.39 Amp Max Output Voltage: 34-54 VDC Output Current: 700 mA CCR Dimmable Output Power: 40Watts Maximum UL & cUL Class 2 Output, UL Type TL Triac (Incandescent) & ELV Dimmable			
IP66			
Made in China	E325626	REV B	HG

## 40 WATT LD40WXXX -TL

CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS

### Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage full range	108 Vac	120 Vac	132 Vac	120 Vac Nominal Value Note: LD25W120, 120Vac Version can be used without dimmer at 120Vac or 208-277Vac
	208Vac	230Vac	300Vac	230Vac Nominal Value (220/230/240/277)
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.34 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.17 A	Measured at 230Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	—	30A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% Ipeak duration $\approx$ 750 $\mu$ sec (1/2*I <sub>p</sub> <sup>2</sup> *t)
Inrush Current (I <sup>2</sup> t)	—	—	0.34 A <sup>2</sup> s	
Leakage Current	—	—	0.28mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at 120 or 230Vac Input, No Dimmer
Power Factor (PF)	0.90	—	—	Measured at 120 or 230Vac Input, No Dimmer

### Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 1
DC Output Constant Current	-5%	Per Table	+5%	Per Tables on Page 1
Output Power	—	—	Per Table	Per Tables on Page 1
Ripple & Noise (Vpk-pk)	—	—	10%	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic.
Ripple (Ipk-pk)	—	—	55%	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic. 120 Hz component
Start-up Time	—	700 mS	1000 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	30 mS	—	Typical @ 120/277Vac Input, Output Full load.

### Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (Tc)	-30 °C	—	+85 °C	Measured at location specified on case.
Operating Temperature (Ta)	-30 °C	—	+50 °C	This is a reference range. Tc controls temperature range.
Storage Temperature (Ts)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	375,000 Hours	—	—	MIL-HDBK-217F Notice 2, Ta = 25C, Output Full Load.

### Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% Io	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% Vo	No Damage, Auto recovery after fault is removed.


**40W****LD40WXXX -TL****PHASE DIMMING**
**LED Optimized Drivers  
Triac & ELV Dimmable**
**40 WATT LD40WXXX -TL**  
 CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS

**Safety Compliance**

Safety	Notes/Standards
UL/CUL	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
Dimming Circuit	AC Phase Dimmable. Incandescent Forward Phase or ELV reverse phase.

**EMC Compliance**


Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

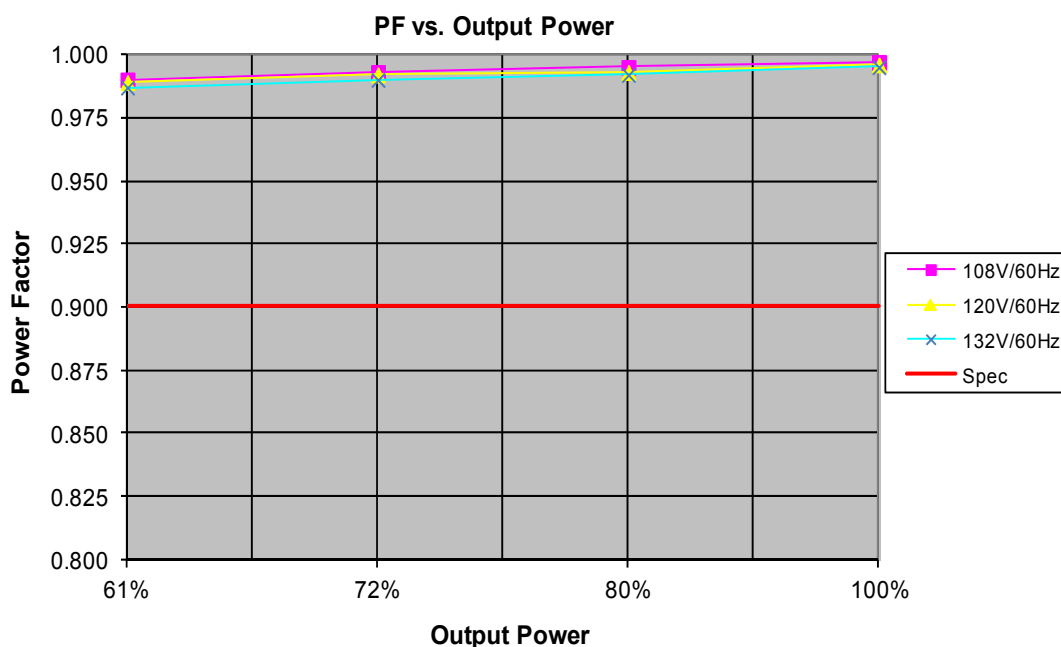**Power Factor Curves (Typical) - Direct Connect to AC (No Dimmer)**


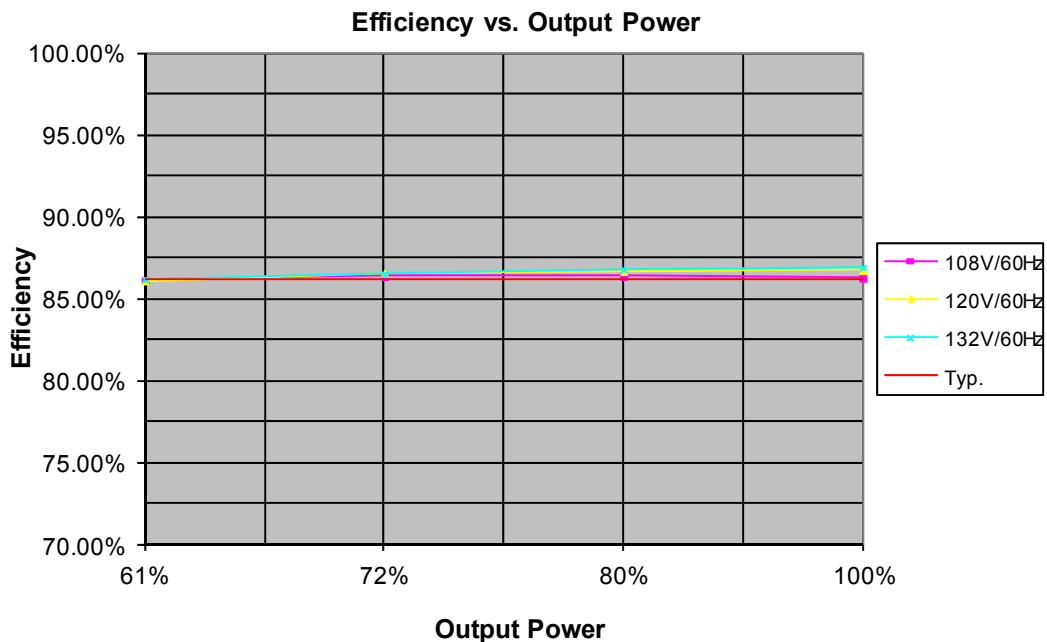
# 40 WATT LD40WXXX -TL

CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS

## THD Curves (Typical) - Direct Connect to AC (No Dimmer)

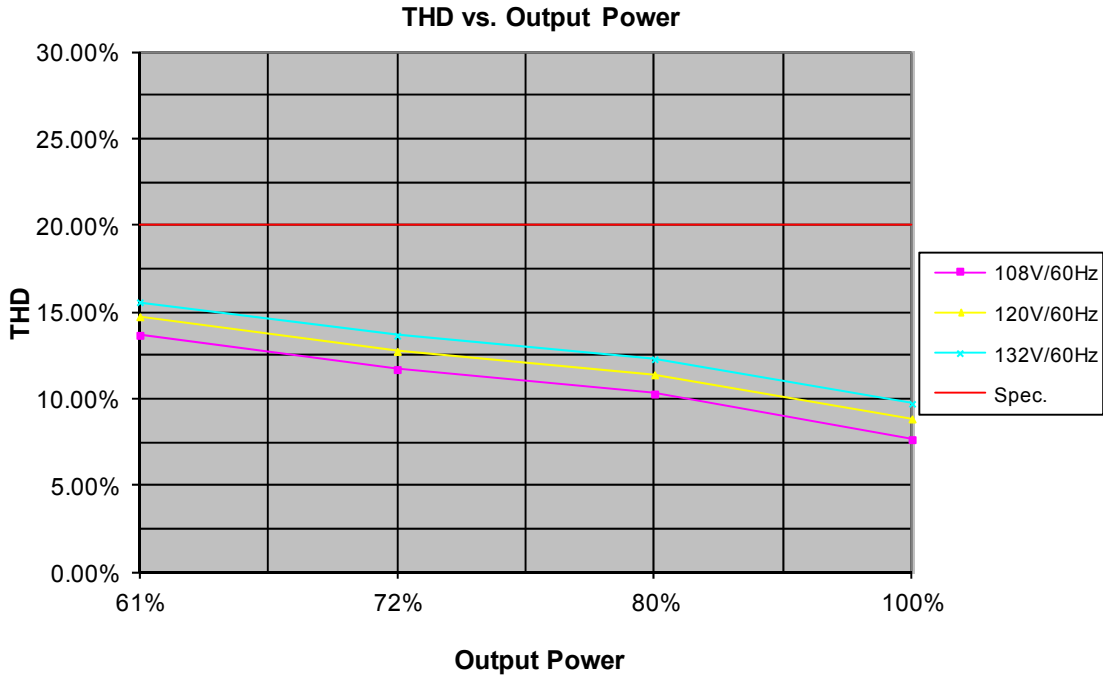

## Efficiency Curve (Typical) - Direct Connect to AC (No Dimmer)



40W

LD40WXXX -TL

PHASE DIMMING




LED Optimized Drivers  
Triac & ELV Dimmable

**40 WATT LD40WXXX -TL**  
CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS

Life vs. Ambient Temperature

LD40WXXX -TL Estimated Life Full Load @ 120Vac

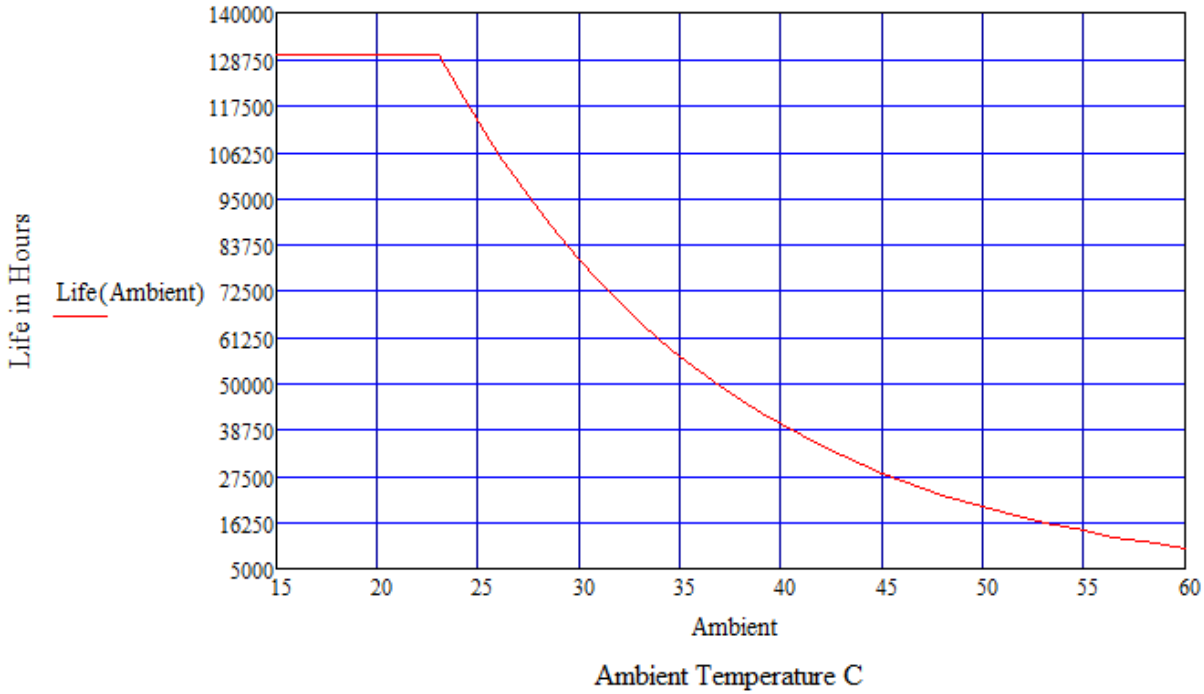

Life vs. Case (Tc) Temperature

LD40WXXX -TL Estimated Life Full Load @ 120Vac

