

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING



DIMMING
LP60W Series
60W

Model: LP60W Series

- Drive Mode: Constant Current or Constant Voltage
- Technology: PFC Corrected 2-Stage Switch Mode
- Output Power: 60W Max.
- Input Voltage: 90 to 305VAC, 47- 63Hz
- Number of Outputs: One
- Output Voltages: 4VDC - 214VDC
- Output Currents: 280mA - 5000mA
- Optional 0-10V or PWM Positive Dimming 10% ~ 100%

Environmental

1. Operating temperature: Tc 90C Maximum. Reference -30 to +65°C ambient
2. For UL Type TL (Tref Max/Meas. Tref): UL Class 2 86/63°C, UL Non Class 2 90/81°C
3. Storage temperature range: -40 to +85°C
4. Humidity (non-condensing): 5% - 95%RH
5. Cooling: Convection
6. Vibration Frequency: 5-55Hz/2g, 30 minutes
7. Impact resistance: 1g/s
8. MTBF@ 40°C: 474,000 hours @ Full Load per MIL-217F Notice 2.

Safety and Compliance

1. Class P: UL8750, EN61347, CSA 22.2 safety listed, UL Class P -or- Type TL: UL8750, EN61347, CSA 22.2, UL TL recognized
2. FCC, 47CFR Part 15 Class B certified
3. Water resistant and Dust Proof Design: IP66, NEMA6, for Dry, Damp, Wet Locations.
4. Compact Miniature, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV/4kV 8/20 μsec surge protection.


Electrical Specifications at 25°C

- Input voltage range: 90 to 305VAC
- Frequency: 47- 63Hz
- Power Factor: ≥ 0.90 at $\geq 75\%$ Load, 120Vac/230Vac/277Vac 50/60Hz
- THD%: $\leq 20\%$ at $\geq 75\%$ Load, 120Vac/230Vac/277Vac 50/60Hz
- Inrush current: $<50A$ at 25C, 277V, cold start, Max. Load
- Input current: 0.80A Maximum
- Efficiency: 86% typical at 230Vac Full Load
- Line regulation accuracy: $\pm 3\%$
- Load regulation accuracy: $\pm 4\%$
- Leakage current: 277Vac, 700uA typical; Hold up time: half cycle

Mechanical Dimensions: Inches [mm]


Material: Black Aluminum Housing
Fully Encapsulated
Weight: 19 oz (538 grams) Typical

Labeling Example

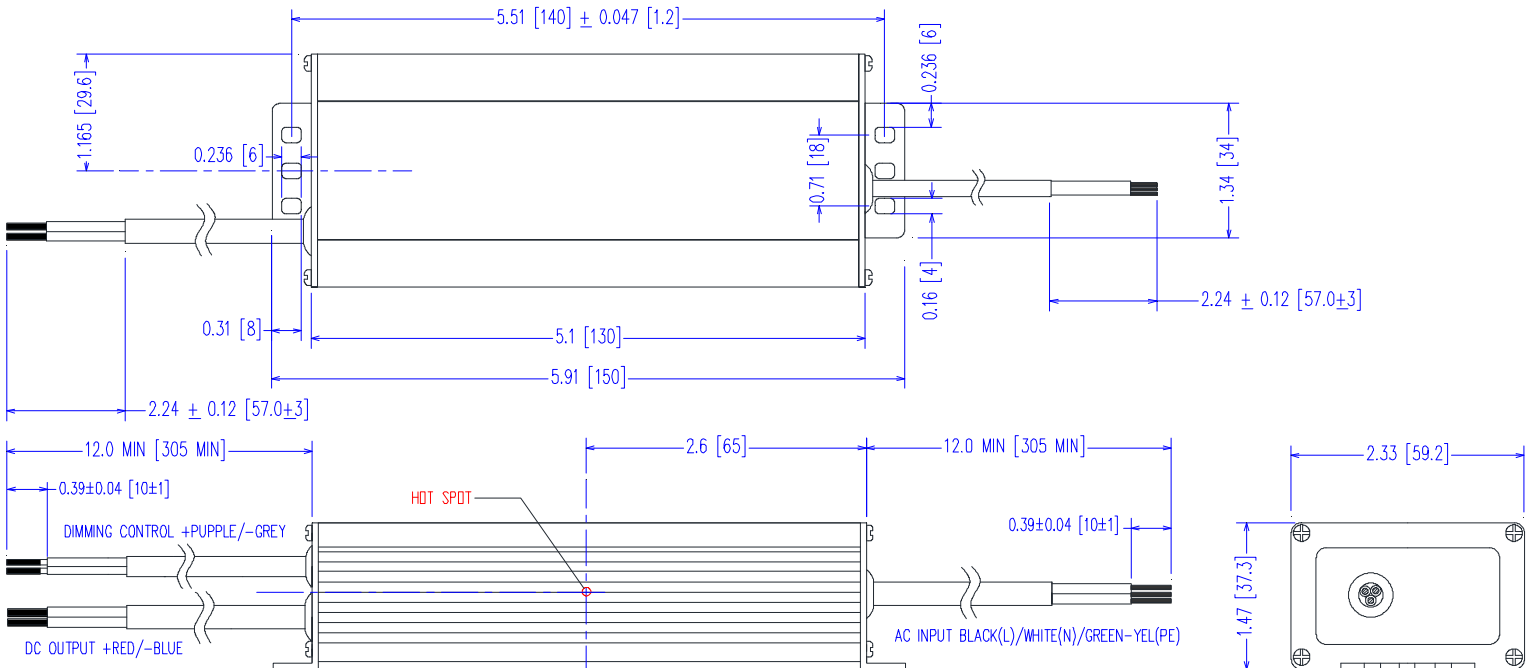

60W**LP60W Series****DIMMING****LED Optimized Drivers****60 Watt - LP60W Series**

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

UL Class P Constant Current Versions**IP66**

Part Number ⁽²⁾	US Class 2	CN Class 2	UL Types	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LP60W-214-C0280-P	NO	NO	HL	72 - 214 VDC	280 mA	± 3%	60W	91%
LP60W-166-C0360-P	NO	NO	HL	56 - 166 VDC	360 mA	± 3%	60W	91%
LP60W-108-C0550-P	NO	NO	HL	36 - 108 VDC	550 mA	± 3%	60W	90%
LP60W-72-C0850-P	NO	NO	HL	24 - 72 VDC	850 mA	± 3%	60W	90%
LP60W-54-C1100-P	YES	YES	HL	18 - 54 VDC	1100 mA	± 3%	60W	88%
LP60W-48-C1250-P	YES	YES	HL	16 - 48 VDC	1250 mA	± 3%	60W	88%
LP60W-42-C1450-P	YES	YES	HL	14 - 42 VDC	1450 mA	± 3%	60W	86%
LP60W-36-C1670-P	YES	YES	HL	12 - 36 VDC	1670 mA	± 3%	60W	86%
LP60W-27-C2250-P	YES	YES	HL	9 - 27 VDC	2250 mA	± 3%	60W	85%
LP60W-24-C2500-P ⁽⁵⁾	YES	YES	HL	8 - 24 VDC	2500 mA	± 3%	60W	85%
LP60W-20-C3000-P	YES	YES	HL	7 - 20 VDC	3000 mA	± 3%	60W	84%
LP60W-15-C4000-P	YES	YES	HL	5 - 15 VDC	4000 mA	± 3%	60W	84%
LP60W-12-C5000-P ⁽⁵⁾	YES	YES	HL	4 - 12 VDC	5000 mA	± 3%	60W	84%

UL Class P Constant Voltage Versions

Part Number	US Class 2	CN Class 2	UL Types	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LP60W-214-P	NO	NO	HL	214 VDC	88 - 280 mA	± 5%	60W	91%
LP60W-166-P	NO	NO	HL	166 VDC	113 - 360 mA	± 5%	60W	91%
LP60W-108-P	NO	NO	HL	108 VDC	175 - 550 mA	± 5%	60W	90%
LP60W-72-P	NO	NO	HL	72 VDC	263 - 850 mA	± 5%	60W	90%
LP60W-54-P	YES	YES	HL	54 VDC	350 - 1200 mA	± 5%	60W	88%
LP60W-48-P	YES	YES	HL	48 VDC	390 - 1250 mA	± 5%	60W	88%
LP60W-42-P	YES	YES	HL	42 VDC	448 - 1450 mA	± 5%	60W	86%
LP60W-36-P	YES	YES	HL	36 VDC	525 - 1670 mA	± 5%	60W	86%
LP60W-27-P	YES	YES	HL	27 VDC	700 - 2250 mA	± 5%	60W	85%
LP60W-24-P ⁽⁵⁾	YES	YES	HL	24 VDC	783 - 2500 mA	± 5%	60W	85%
LP60W-20-P	YES	YES	HL	20 VDC	938 - 3000 mA	± 5%	60W	84%
LP60W-15-P	YES	YES	HL	15 VDC	1250 - 4000 mA	± 5%	60W	84%
LP60W-12-P ⁽⁵⁾	YES	YES	HL	12 VDC	1563 - 5000 mA	± 5%	60W	84%



Notes

1. Typical efficiency measured at 230VAC input, full load
2. For dimmable versions add appropriate designator to the end of the part number: For Example: LP60W-15-C5000-PRD is 0-10V or resistance dimmable version, LP60W-15-C5000-PPD is PWM dimmable version.
-PRD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.
-PPD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
3. -PRD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 4 for details.
4. -PPD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5kHz, 0-10V Pulse. See page 5 for details.
5. SAM Recognized under E325626.

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LP60W Series
60W



IP66



Constant Current Versions

Part Number ⁽²⁾	US Class 2	CN Class 2	UL Types	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LP60W-214-C0280	NO	NO	TL & HL	72 - 214 VDC	280 mA	± 3%	60W	91%
LP60W-166-C0360	NO	NO	TL & HL	56 - 166 VDC	360 mA	± 3%	60W	91%
LP60W-108-C0550	NO	NO	TL & HL	36 - 108 VDC	550 mA	± 3%	60W	90%
LP60W-72-C0850	NO	NO	TL & HL	24 - 72 VDC	850 mA	± 3%	60W	90%
LP60W-54-C1100	YES	YES	TL & HL	18 - 54 VDC	1100 mA	± 3%	60W	88%
LP60W-48-C1250	YES	YES	TL & HL	16 - 48 VDC	1250 mA	± 3%	60W	88%
LP60W-42-C1450	YES	YES	TL & HL	14 - 42 VDC	1450 mA	± 3%	60W	86%
LP60W-36-C1670	YES	YES	TL & HL	12 - 36 VDC	1670 mA	± 3%	60W	86%
LP60W-27-C2250	YES	YES	TL & HL	9 - 27 VDC	2250 mA	± 3%	60W	85%
LP60W-24-C2500 ⁽⁵⁾	YES	YES	TL & HL	8 - 24 VDC	2500 mA	± 3%	60W	85%
LP60W-20-C3000	YES	YES	TL & HL	7 - 20 VDC	3000 mA	± 3%	60W	84%
LP60W-15-C4000	YES	YES	TL & HL	5 - 15 VDC	4000 mA	± 3%	60W	84%
LP60W-12-C5000 ⁽⁵⁾	YES	YES	TL & HL	4 - 12 VDC	5000 mA	± 3%	60W	84%

Constant Voltage Versions

Part Number	US Class 2	CN Class 2	UL Types	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LP60W-214	NO	NO	TL & HL	214 VDC	88 - 280 mA	± 5%	60W	91%
LP60W-166	NO	NO	TL & HL	166 VDC	113 - 360 mA	± 5%	60W	91%
LP60W-108	NO	NO	TL & HL	108 VDC	175 - 550 mA	± 5%	60W	90%
LP60W-72	NO	NO	TL & HL	72 VDC	263 - 850 mA	± 5%	60W	90%
LP60W-54	YES	YES	TL & HL	54 VDC	350 - 1200 mA	± 5%	60W	88%
LP60W-48	YES	YES	TL & HL	48 VDC	390 - 1250 mA	± 5%	60W	88%
LP60W-42	YES	YES	TL & HL	42 VDC	448 - 1450 mA	± 5%	60W	86%
LP60W-36	YES	YES	TL & HL	36 VDC	525 - 1670 mA	± 5%	60W	86%
LP60W-27	YES	YES	TL & HL	27 VDC	700 - 2250 mA	± 5%	60W	85%
LP60W-24 ⁽⁵⁾	YES	YES	TL & HL	24 VDC	783 - 2500 mA	± 5%	60W	85%
LP60W-20	YES	YES	TL & HL	20 VDC	938 - 3000 mA	± 5%	60W	84%
LP60W-15	YES	YES	TL & HL	15 VDC	1250 - 4000 mA	± 5%	60W	84%
LP60W-12 ⁽⁵⁾	YES	YES	TL & HL	12 VDC	1563 - 5000 mA	± 5%	60W	84%

Notes

1. Typical efficiency measured at 230VAC input, full load
2. For dimmable versions add appropriate designator to the end of the part number: For Example: LP60W-15-C5000-RD is 0-10V or resistance dimmable version, LP60W-15-C5000-PD is PWM dimmable version.
-RD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.
-PD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
3. -RD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 4 for details.
4. -PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5kHz, 0-10V Pulse. See page 5 for details.
5. SAM Recognized under E325626.

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


-RD 2-Wire 0-10V CCR Dimming Scheme

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	—	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Sink Current into 0-10V Purple Wire	0mA	—	1.2mA


Notes

1. -RD 0-10V dimmable version comes with an extra two wires +Purple/-Grey on the output side.
2. -RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal.
Recommended wall slide dimmer is Leviton IP710 or equivalent
3. -RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
4. -RD 0-10V dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.


-RD 2-Wire Resistance Dimming Scheme

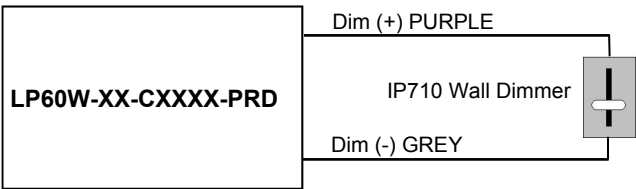

-RD 2-Wire 0-10V Analog Dimming Scheme

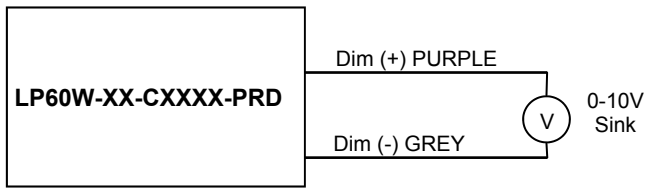

% Output Current vs. 0-10VDC Dimming Input

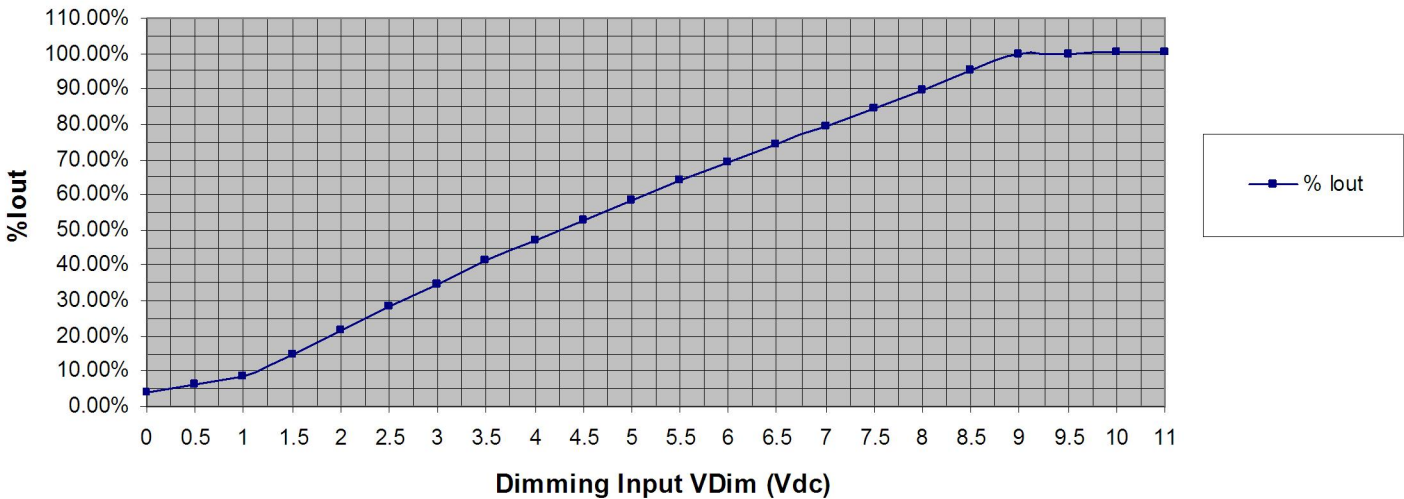

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LP60W Series
60W


-PD 2-Wire CCR PWM Positive Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0V	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0V	10V	+15V
Current into PWM Input (Purple Wire)	0mA	—	1.2mA
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%


Notes

1. -PD PWM Dimmable version comes with an extra 2 wires +Purple/-Grey on the output side.
2. -PD PWM Dimmable version is not intended to dim below about 5% @ 0% Duty Cycle or 10% @ 10% Duty Cycle
3. -PD PWM dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.

-PD 2-Wire PWM Positive Dimming Scheme

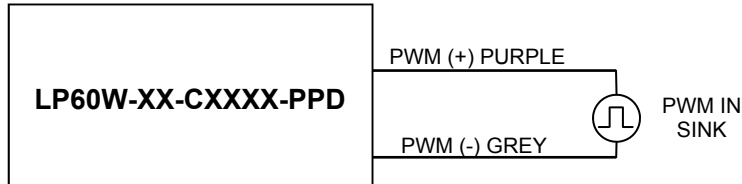

% Output Current vs. 1.0 kHz, Positive Duty Cycle Dimming Input

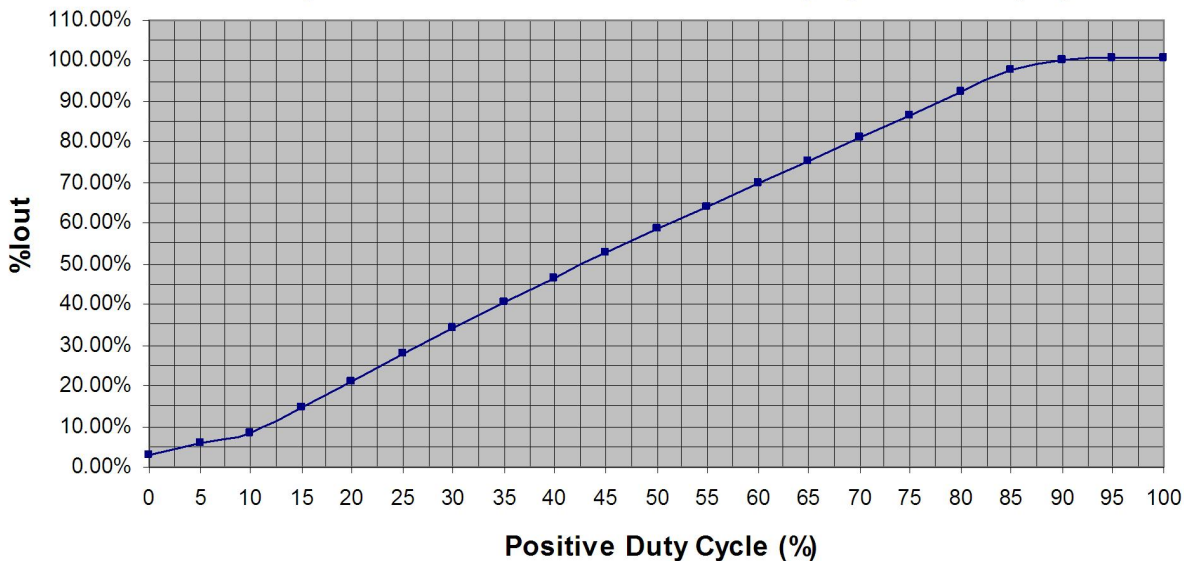

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	90 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.57 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.32 A	Measured at 230Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	42A	50A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% I _{peak} duration ~750 μsec (1/2*I _p ² *t)
Inrush Current (I ² t)	—	—	0.94 A ² s	
Leakage Current	—	—	0.68mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at 120, 230, 277Vac Input, Output ≥75% Load
Power Factor (PF)	0.90	—	—	Measured at 120, 230, 277Vac Input, Output ≥75% Load

Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 2 & 3
DC Output Constant Current	-3%	Per Table	+3%	Per Tables on Page 2 & 3
Output Power	—	—	Per Table	Per Tables on Page 2 & 3
Ripple & Noise (V _{pk-pk})	—	—	5% V _o	20 MHz BW, Full load output in parallel with 0.1 μF ceramic & 10 μF Electrolytic.
Ripple (I _{pk-pk})	—	—	5% I _o	20 MHz BW, Full load output in parallel with 0.1 μF ceramic & 10 μF Electrolytic. 120 Hz component (Flicker Free)
Start-up Time	—	200 mS	500 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	40 mS	—	Typical @ 277Vac Input, Output Full load.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (T _c)	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (T _a)	-30 °C	—	+60 °C	This is a reference range. T _c controls temperature range.
Storage Temperature (T _s)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	474,000 Hours	—	—	MIL-HDBK-217F Notice 2, T _a = 25C, Output Full Load.

Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% I _o	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% V _o	No Damage, Auto recovery after fault is removed.

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LP60W Series
60W

Safety Certification


Safety	Notes/Standards
UL Class P UL/CUL Listed	UL8750 & CAN/CSA C22.2 No. 250.13, UL Class P, UL Type HL
UL Type TL UL/CUL Recognized	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL & UL Type TL UL Class 2 86/63°C, UL Non-Class 2 90/81°C
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac. Parts use a GDT. Hipot cannot be done with Case or GND connected.
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
0-10V Dimming Circuit	Dim+ Purple/Dim- Gray are considered part of the secondary circuit.

EMC Certification

Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2kV L-N, 4kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

Power Factor Curves (Typical)

PF vs. Output Power

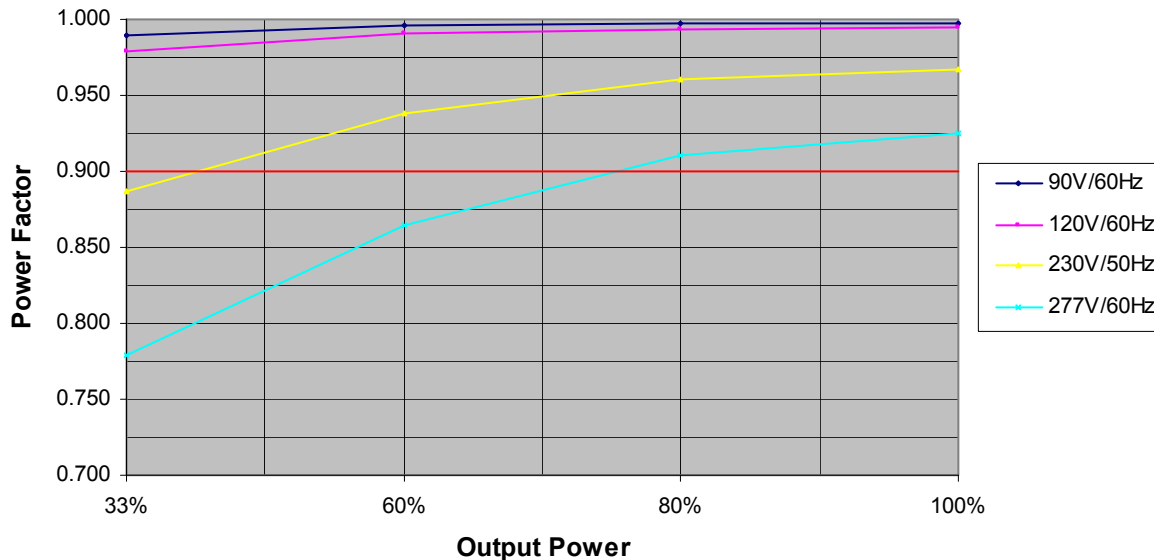

60W

LP60W Series

DIMMING




LED Optimized Drivers

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


THD Curves (Typical)

THD vs. Output Power

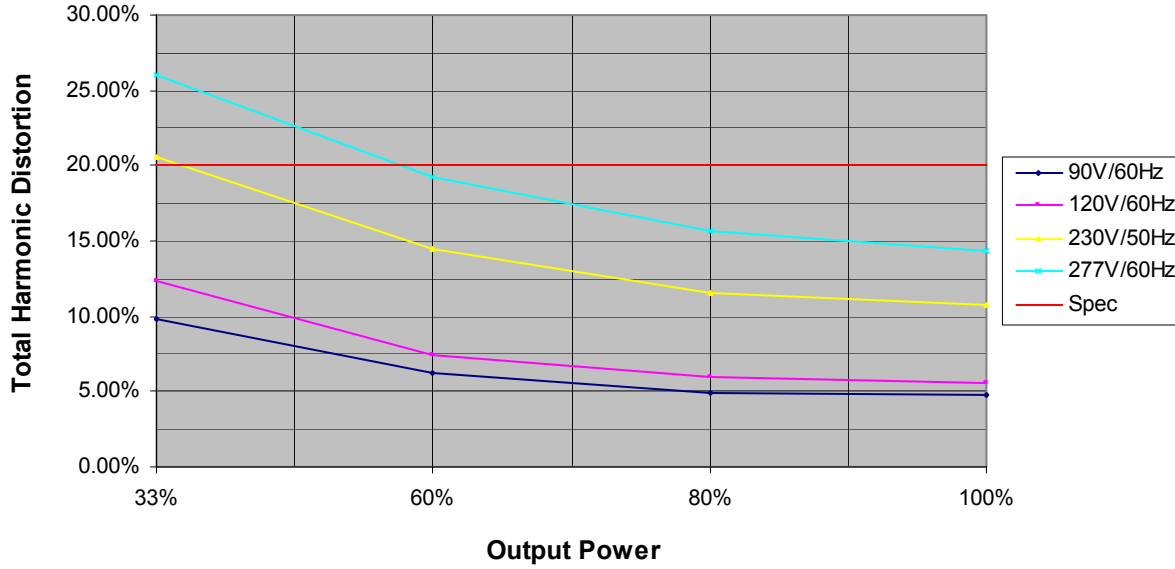

Efficiency Curve (Typical)

Efficiency vs. Output Power

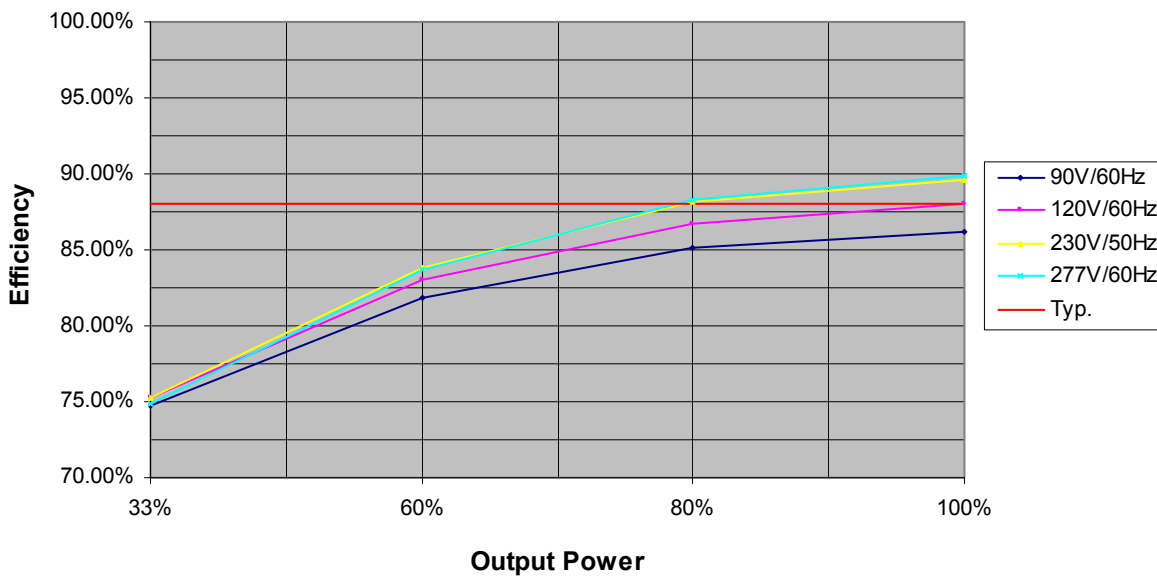


60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LP60W Series
60W


Life vs. Ambient Temperature

LP60W Estimated Life Full Load @ 120Vac

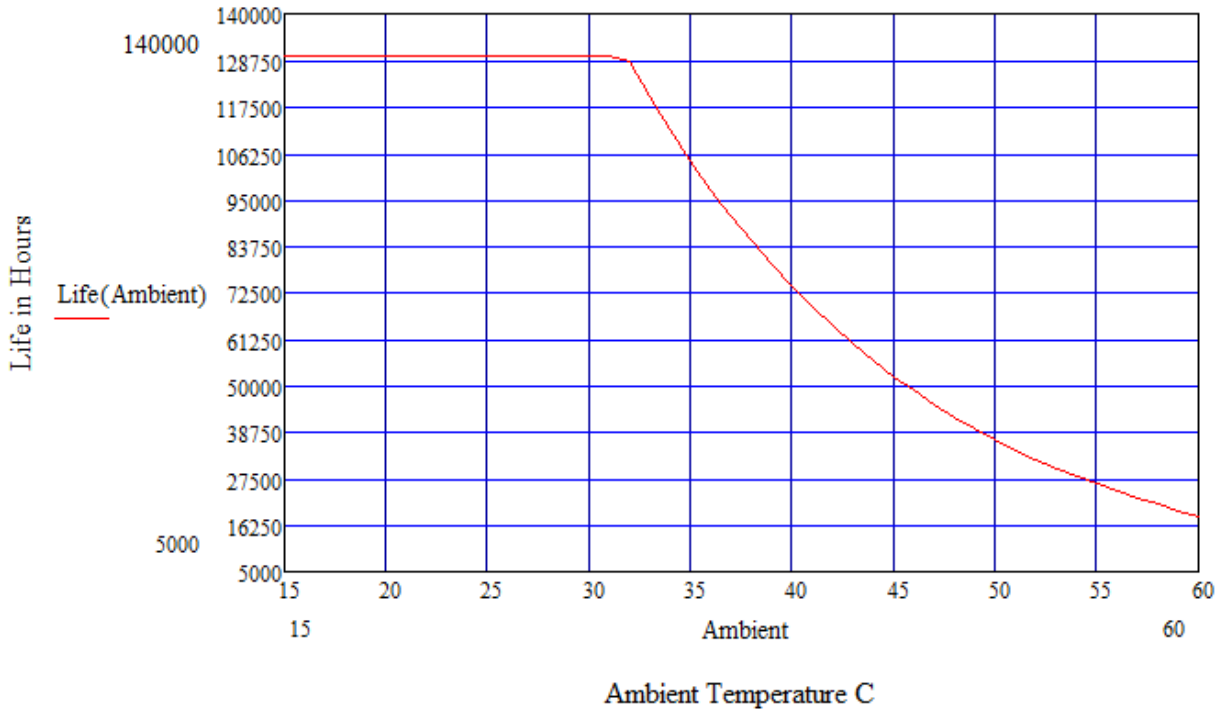

Life vs. Case (Tc) Temperature

LP60W Estimated Life Full Load @ 120Vac

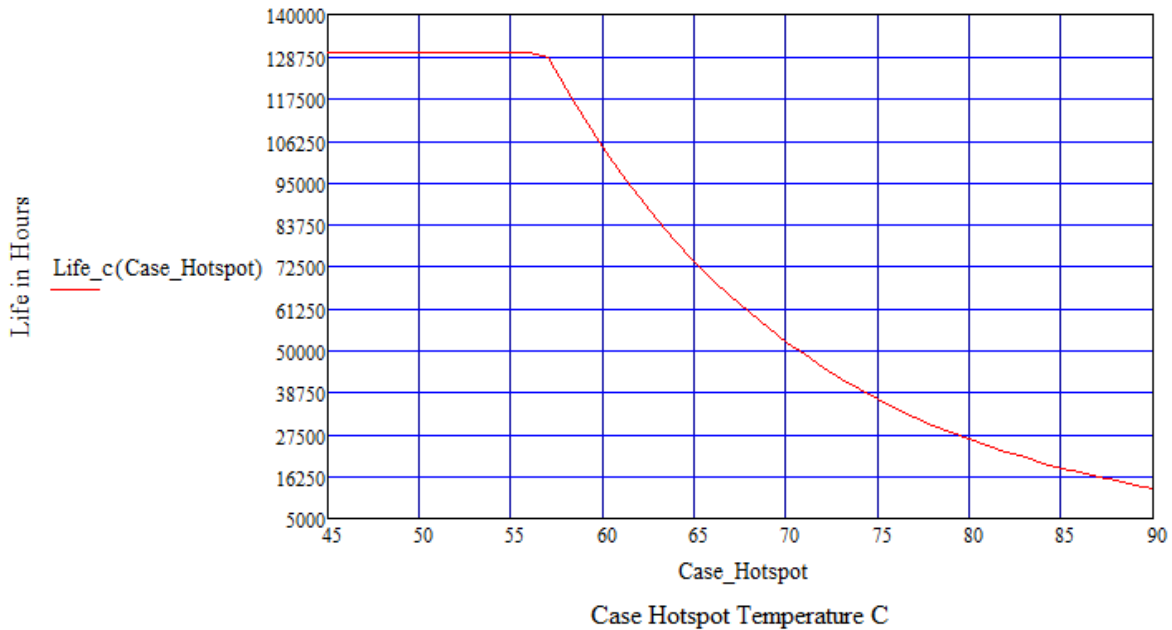

60W

LP60W Series

DIMMING



LED Optimized Drivers

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

