

12 Watt LD12Wxxx –TL Series

CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS



PHASE DIMMING

LD12Wxxx –TL

12W

Model: LD12W –TL Series

- Designed for use with Triac or ELV Phase Dimmers 120Vac or 230Vac/240Vac.
- 120Vac Version can be used without dimmer 120/208-277Vac
- Drive Mode: PFC Corrected
- Output Power: 12W Max.
- Input Voltage: 120 or 208-277VAC, 50/60Hz
- Number of Outputs: One
- Output Voltages: 7VDC - 48VDC
- Output Currents: 250mA - 1000mA

Environmental

1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 40°C: 402,000 hours @ Full Load per MIL-217F Notice 2.

Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety recognized, UL Type HL
2. FCC Class B @120VAC, Class A @ 230/277Vac
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp Locations.
4. Small compact plastic case.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN614000-4-5: 2kV surge protection.

Electrical Specifications at 25°C

- Input Voltage: 120Vac or 230Vac (208-277Vac)
- Frequency: 50/60HZ
- Power Factor: ≥ 0.90 Full Range no dimmer.
- THD: $\leq 20\%$ Full Range no dimmer
- Inrush current: $< 10A$ at 25C, 120Vac, cold start, Max. Load
- Input current: 0.12A at 120Vac, 60Hz, Maximum Load
- Efficiency: 83% typical at 120Vac, 60Hz
- Line regulation accuracy: $\pm 3\%$
- Load regulation accuracy: $\pm 5\%$
- Dimming Range: CCR Mode See Graph page 2.



IP66



120VAC Constant Current Versions

| Part Number ^(1,2) | US Class 2 Type HL | CN Class 2 | Output Voltage Range | Output Constant Current | Current Accuracy | Output Power Maximum | Typical Efficiency ⁽³⁾ | DIMMER ^(5,6) |
|-------------------------------------|--------------------|------------|----------------------|-------------------------|------------------|----------------------|-----------------------------------|-------------------------|
| LD12W120-48-C0250-TL | YES | YES | 29 - 48 VDC | 250 mA | $\pm 5\%$ | 12W | 85% | Incan / ELV |
| LD12W120-48-C0220-TL ⁽⁸⁾ | YES | YES | 29 - 48 VDC | 220 mA | $\pm 5\%$ | 10.6W | 82% | Incan / ELV |
| LD12W120-40-C0300-TL | YES | YES | 24 - 40 VDC | 300 mA | $\pm 5\%$ | 12W | 85% | Incan / ELV |
| LD12W120-36-C0350-TL | YES | YES | 22 - 36 VDC | 350 mA | $\pm 5\%$ | 12.6W | 84% | Incan / ELV |
| LD12W120-24-C0500-TL | YES | YES | 14 - 24 VDC | 500 mA | $\pm 5\%$ | 12W | 83% | Incan / ELV |
| LD12W120-16-C0800-TL | YES | YES | 10 - 16 VDC | 800 mA | $\pm 5\%$ | 12.8W | 82% | Incan / ELV |
| LD12W120-12-C1000-TL | YES | YES | 7 - 12 VDC | 1000 mA | $\pm 5\%$ | 12W | 81% | Incan / ELV |

208-277VAC Constant Current Versions

1. For 220/230/240/277Vac version Change Part designator to: LD12W230-XX-CXXXX-TL
2. LD12W120, 120Vac Version can be used without dimmer at 120Vac or 208-277Vac.

Notes

3. Typical efficiency for LD12W120 measured at 120Vac, LD12W230 measured at 230Vac input, full load, no dimmer.
4. All versions are $\sim \leq 15\%$ to $\sim 100\%$ CCR Dimmable with any good quality proper power phase dimmer. Refer to page 2
5. For LD12W120 use any good quality 120VAC $\leq 600W$ Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.
6. For LD12W230 use any good quality 230Vac $\leq 500W$ Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.
7. LD12W230 version will also work with 277Vac phase dimmers but loading must meet minimum requirements of dimmer being used.
8. LD12W120 child part number, lout is $\pm 10\%$ 208-277Vac no dimmer in circuit.

12W

LD12Wxxx-TL

PHASE DIMMING




LED Optimized Drivers Triac & ELV Dimmable

12 Watt LD12Wxxx-TL Series CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

Typical Dimming Curves:



%Output Current vs. Conduction Angle in Degrees

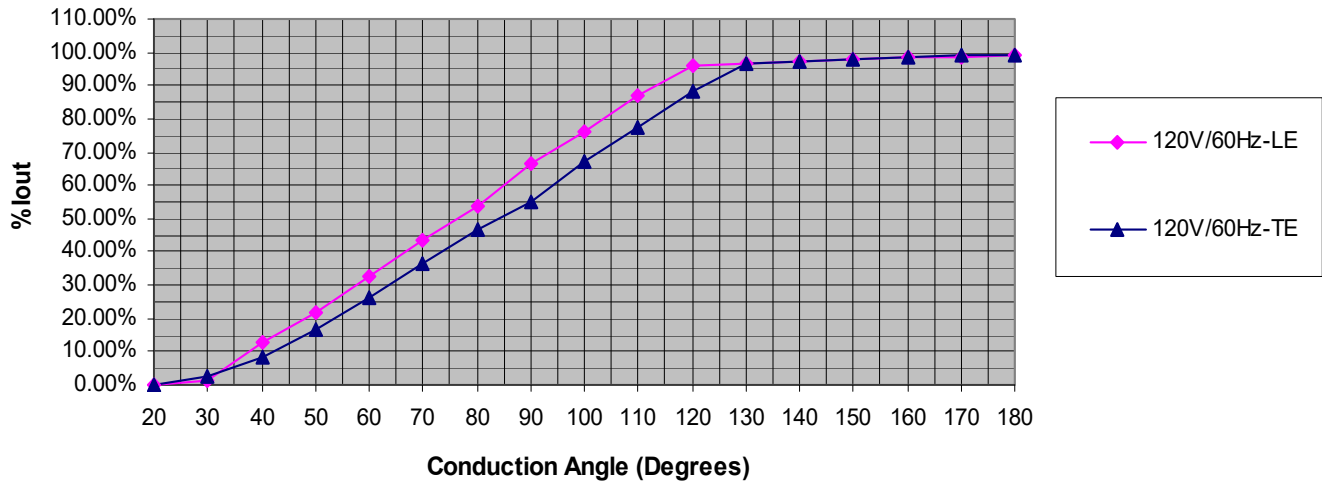

Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case
Fully Encapsulated
Weight: 128 grams (4.5 oz) Typical

Labeling Example

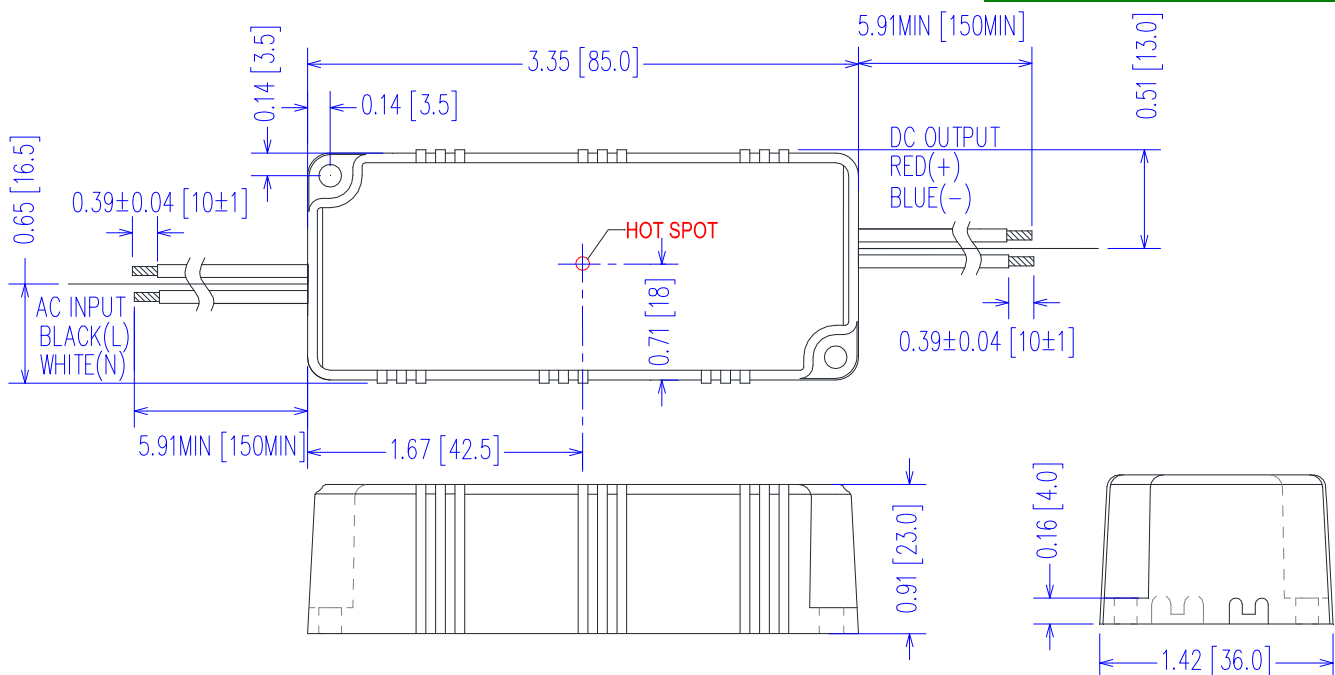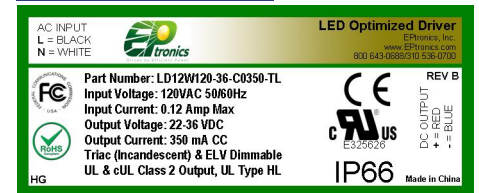

12 Watt LD12Wxxx –TL Series

CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

Input Specifications

| Parameter | Min. | Typ. | Max. | Notes/Conditions |
|-----------------------------------|---------|---------|------------------------|---|
| Input Voltage | 108 Vac | 120 Vac | 132 Vac | 120 Vac Nominal Value Note: LD12W120, 120Vac Version can be used without dimmer at 120Vac or 208-277Vac |
| | 208Vac | 230Vac | 300Vac | 230Vac Nominal Value (220/230/240/277) |
| Input Frequency | 47 Hz | — | 63 Hz | 50/60Hz Nominal |
| Input AC Current | — | — | 0.14 A | Measured at 120Vac/60Hz Input, Output Full load. |
| | — | — | 0.08 A | Measured at 230Vac/60Hz Input, Output Full load. |
| Inrush Current (Peak) | — | 2A | 10A | Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% Ipeak duration \approx 750 μ sec (1/2*I _p ² *t) |
| Inrush Current (I ² t) | — | — | 0.038 A ² s | |
| Leakage Current | — | — | 0.28mA | Measured at 120Vac/60Hz Input, Output Full load. |
| | — | — | 0.75mA | Measured at 277Vac/60Hz Input, Output Full load. |
| THD | — | — | 20% | Measured at 120 or 230Vac Input, Output \geq 60% Load, No Dimmer |
| Power Factor (PF) | 0.90 | — | — | Measured at 120 or 230Vac Input, Output \geq 60% Load, No Dimmer |

Output Specifications

| Parameter | Min. | Typ. | Max. | Notes/Conditions |
|----------------------------|-----------|-----------|--------------------|--|
| DC Output Voltage | Per Table | — | Per Table | Per Tables on Page 1 |
| DC Output Constant Current | -5% | Per Table | +5% | Per Tables on Page 1 |
| Output Power | — | — | Per Table | Per Tables on Page 1 |
| Ripple & Noise (Vpk-pk) | — | — | 10% | 20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic. |
| Ripple (Ipk-pk) | — | — | 60% I _o | 20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic. 120 Hz component |
| Start-up Time | — | 700 mS | 1000 mS | Measured at 120Vac/60Hz Input, Output Full load. |
| Hold-up Time | — | 30 mS | — | Typical @ 120/277Vac Input, Output Full load. |

Environmental Specifications

| Parameter | Min. | Typ. | Max. | Notes/Conditions |
|----------------------------|---------------|------|--------|---|
| Case Temperature (Tc) | -30 °C | — | +90 °C | Measured at location specified on case. |
| Operating Temperature (Ta) | -30 °C | — | +60 °C | This is a reference range. Tc controls temperature range. |
| Storage Temperature (Ts) | -40 °C | — | +85 °C | Non operating temperature range. |
| Operating Humidity | — | — | 95% RH | Relative Humidity, non-condensing. |
| Vibration | 5 Hz | — | 55 Hz | 2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis. |
| MTBF | 402,000 Hours | — | — | MIL-HDBK-217F Notice 2, Ta = 25C, Output Full Load. |

Protection Specifications

| Parameter | Min. | Typ. | Max. | Notes/Conditions |
|----------------------------|------|------|---------------------|--|
| Output Short Circuit (SCP) | — | — | — | No Damage, Auto recovery after short is removed. |
| Output Over Current (OCP) | — | — | +8% I _o | Constant Current Limiting circuit. |
| Output Over Voltage (OVP) | — | — | 120% V _o | No Damage, Auto recovery after fault is removed. |

12W**LD12Wxxx –TL****PHASE DIMMING****LED Optimized Drivers
Triac & ELV Dimmable**

12 Watt LD12Wxxx –TL Series


CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

Safety Compliance

| Safety | Notes/Standards |
|----------------------|--|
| UL/CUL | UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL |
| CE | EN61347-1, EN61347-2-13 |
| Withstand Voltage | Input to Output: 3750 Vac |
| Isolation Resistance | Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH |
| Dimming Circuit | AC Phase Dimmable. Incandescent Forward Phase or ELV reverse phase. |

EMC Compliance


| Standard | Notes/Conditions |
|--------------------|--|
| FCC, 47CFR Part 15 | Class B @120Vac, Class A @ 230/277Vac |
| EN 55015 | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment. |
| EN 61000-3-2 | Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power |
| EN 61000-3-3 | Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker. |
| EN 61000-4-5 | Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG |
| Energy Star | Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode. |

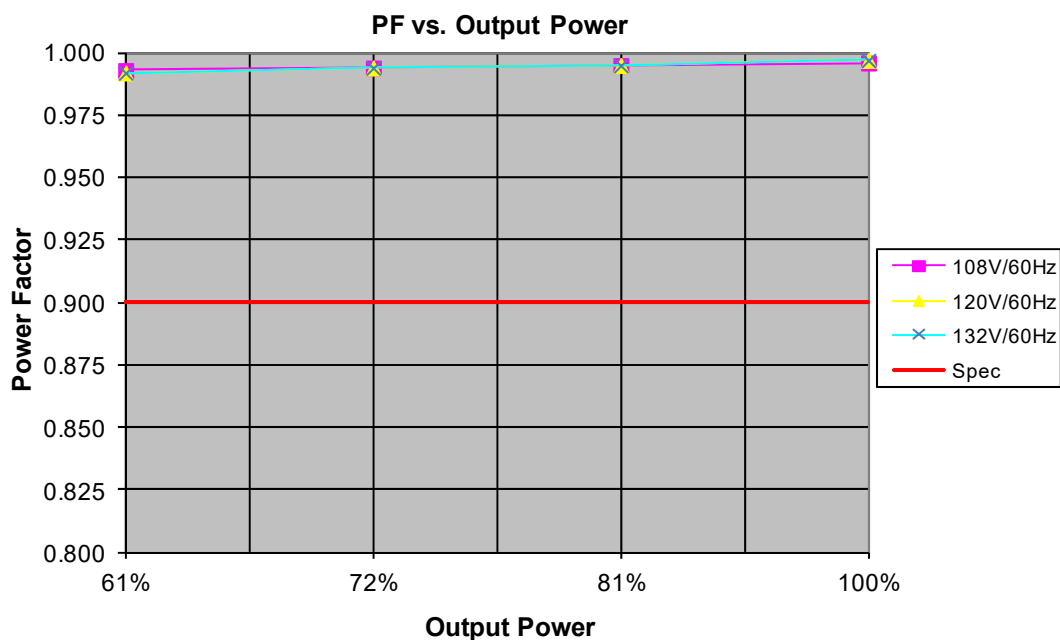Power Factor Curves (Typical) - Direct Connect to AC (No Dimmer)

12 Watt LD12Wxxx –TL Series
CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS


Life vs. Ambient Temperature

LD12W Estimated Life Full Load @ 120Vac

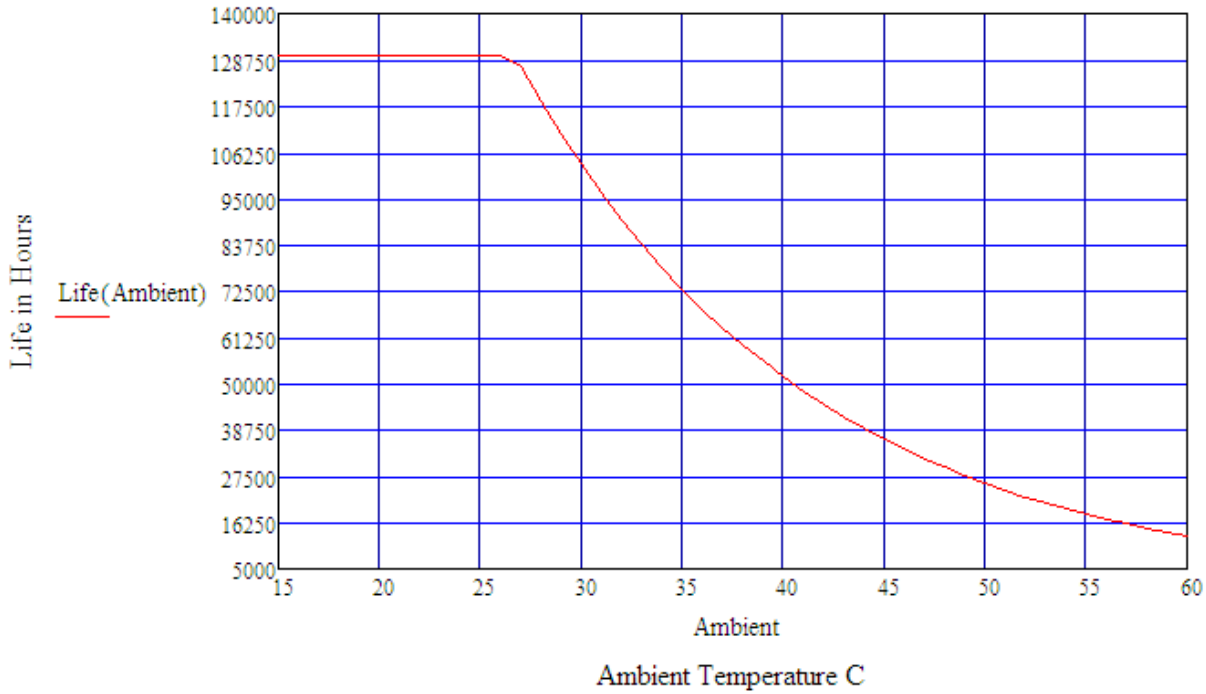

Life vs. Case (Tc) Temperature

LD12W Estimated Life Full Load @ 120Vac

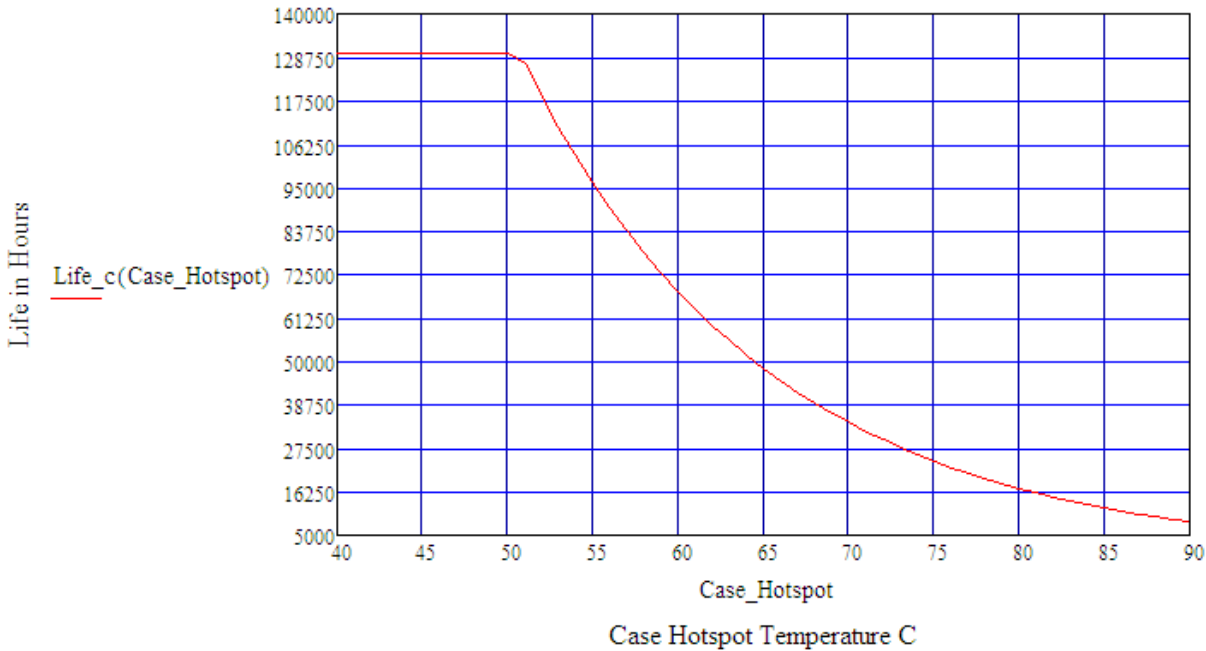

12W

LD12Wxxx -TL

PHASE DIMMING




LED Optimized Drivers
Triac & ELV Dimmable

12 Watt LD12Wxxx -TL Series

CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

THD Curves (Typical) - Direct Connect to AC (No Dimmer)

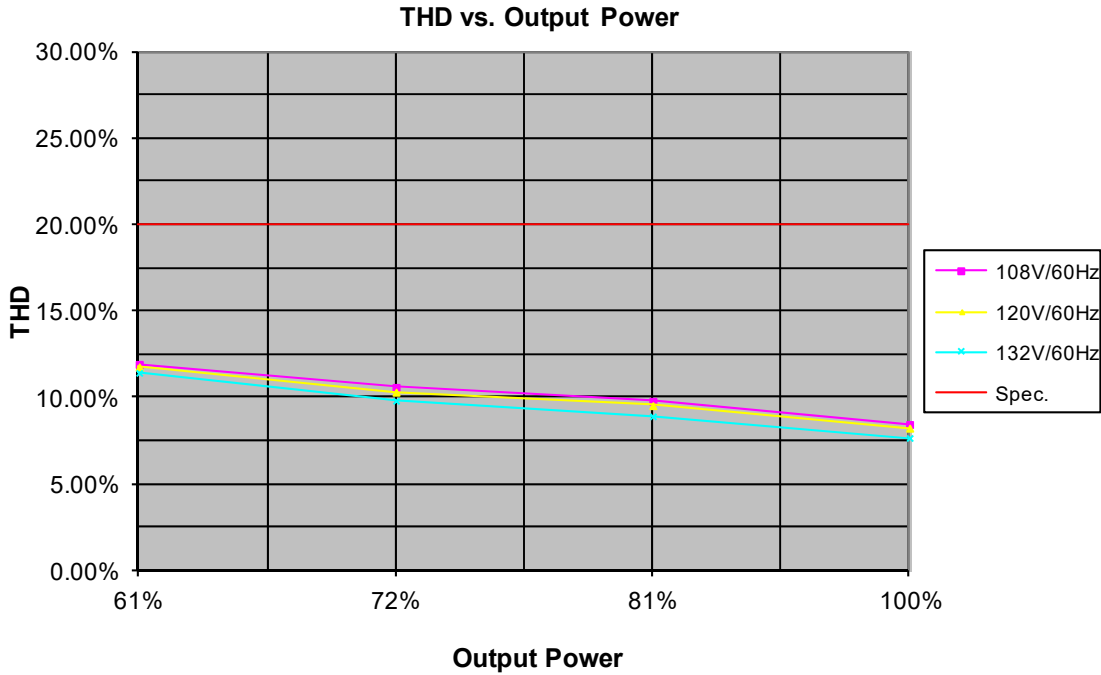

Efficiency Curve (Typical) - Direct Connect to AC (No Dimmer)

