

25 Watt - LD25W-NN Series

CONSTANT VOLTAGE LED DRIVER



CONSTANT VOLTAGE
LD25W-NN Series
25W

Model: LD25W-NN Series

- Drive Mode: Constant Voltage
- For use with Constant Voltage LED Lighting
- Technology: PFC Off-Line Switch Mode
- Output Power: 25W Max.
- Input Voltage: 120 to 277VAC, 47- 63Hz
- Number of Outputs: One
- Output Voltages: 12VDC - 36VDC
- Output Currents: 175mA - 2080mA

Environmental


1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 25°C: 482,000 hours @ Full Load per MIL-217F Notice 2.

Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety recognized, UL Type HL
2. FCC, 47CFR Part 15 Class B & EN55015 compliant.
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp, Wet Locations.
4. Compact, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV L-N, 8/20 µsec surge protection.

Electrical Specifications at 25°C

- Input voltage range: 120 to 277Vac (Full Range 90 to 305VAC)
- Frequency: 47- 63HZ
- Power Factor: ≥ 0.90 at $\geq 70\%$ Load, 120Vac/230Vac, $\geq 88\%$ Load 277Vac
- THD%: $\leq 20\%$ at $\geq 60\%$ Load, 120Vac/230Vac/277Vac
- Inrush current: $<15A$ at 25C, 277Vac, cold start, Full Load
- Input current: 0.25A at 120Vac, 60Hz, Full Load
- Efficiency: 83% typical 230Vac Full Load
- Line regulation accuracy: $\pm 3\%$
- Load regulation accuracy: $\pm 4\%$
- Leakage current: 277Vac, 750uA maximum



IP66



Constant Voltage Versions

Part Number	US Class 2	CN Class 2	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LD25W-36	YES	YES	36 VDC	175 - 700 mA	$\pm 5\%$	25W	83%
LD25W-24 ⁽²⁾	YES	YES	24 VDC	260 - 1040 mA	$\pm 5\%$	25W	82%
LD25W-16	YES	YES	16 VDC	390 - 1560 mA	$\pm 5\%$	25W	81%
LD25W-12 ⁽²⁾	YES	YES	12 VDC	520 - 2080 mA	$\pm 5\%$	25W	78%

Notes

1. Typical efficiency measured at 230VAC input, full load
2. SAM Recognized

25W

LD25W-NN Series

CONSTANT VOLTAGE



LED Optimized Drivers




25 Watt - LD25W-NN Series

CONSTANT VOLTAGE LED DRIVER

Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case
Fully Encapsulated
Weight: 198 grams (7.0 oz) Typical

Labeling Example

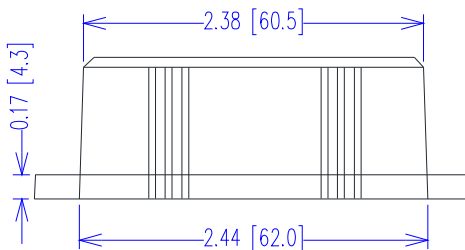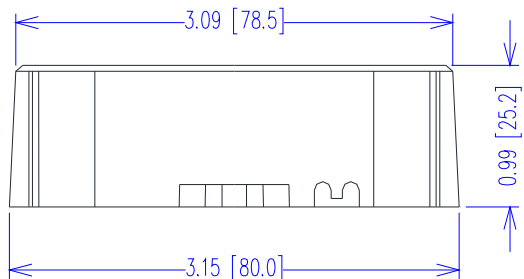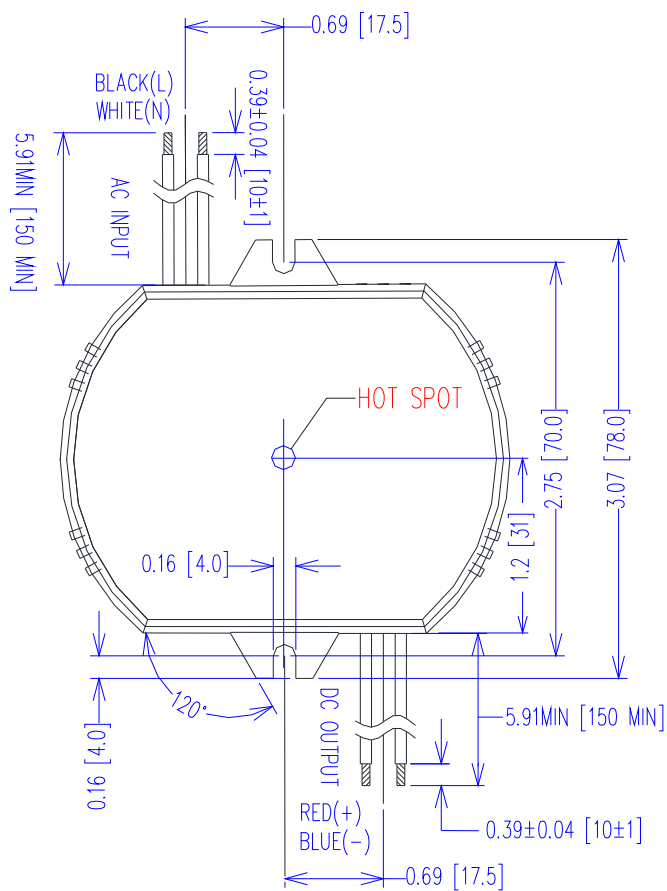

LED Optimized Driver
 Part Number: LD25W-12
 Input Voltage: 90-305 VAC 50/60 Hz
 Input Current: 0.35 Amp Max
 Output Voltage: 12 VDC Constant Voltage
 Output Current: 520-2080 mA
 Output Power: 25W Max
 UL & cUL Class 2 Output, UL Type HL
 SAM Recognized

UL US IP66
 E325626

FC RoHS CE
 DC OUTPUT
 + = RED
 - = BLUE

REV E1.2 Made in China



LED Optimized Drivers

25 Watt - LD25W-NN Series

CONSTANT VOLTAGE LED DRIVER

CONSTANT VOLTAGE
LD25W-NN Series
25W

Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	90 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.24 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.13 A	Measured at 230Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	—	15A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% I _{peak} duration \approx 750 μ sec (1/2*I _p ² *t)
Inrush Current (I ² t)	—	—	0.09 A ² s	
Leakage Current	—	—	0.28mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at 120, 230, 277Vac Input, Output \geq 60% Load
Power Factor (PF)	0.90	—	—	\geq 0.90 at \geq 70% Load, 120Vac/230Vac, \geq 88% Load 277Vac

Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Table on Page 1
DC Output Current Range	25%	Per Table	+5%	Per Table on Page 1
Output Power	—	—	Per Table	Per Table on Page 1
Ripple & Noise (V _{pk-pk})	—	—	20% V _o	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic.
Ripple (I _{pk-pk})	—	—	50% I _o	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic. 120 Hz component
Start-up Time	—	700 mS	1000 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	30 mS	—	Typical @ 277Vac Input, Output Full load.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (T _c)	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (T _a)	-30 °C	—	+60 °C	This is a reference range. T _c controls temperature range.
Storage Temperature (T _s)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	482,000 Hours	—	—	MIL-HDBK-217F Notice 2, T _a = 25C, Output Full Load.

Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% I _o	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% V _o	No Damage, Auto recovery after fault is removed.

25W

LD25W-NN Series

CONSTANT VOLTAGE

**LED Optimized Drivers****25 Watt - LD25W-NN Series**


CONSTANT VOLTAGE LED DRIVER

Safety Compliance

Safety	Notes/Standards
UL/CUL	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH


EMC Compliance

Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, $\geq 80\%$ Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

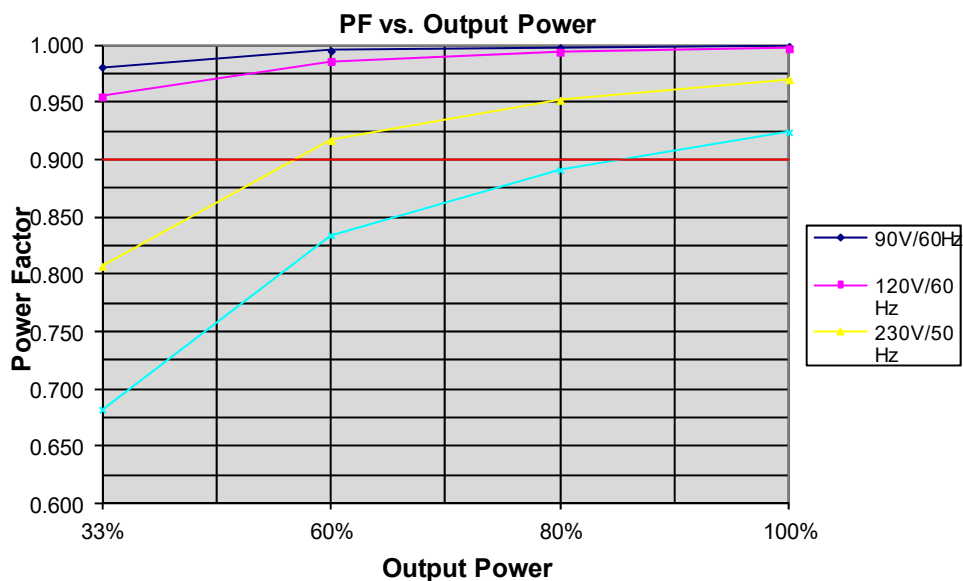Power Factor Curves (Typical)


THD Curves (Typical)

THD vs. Output Power

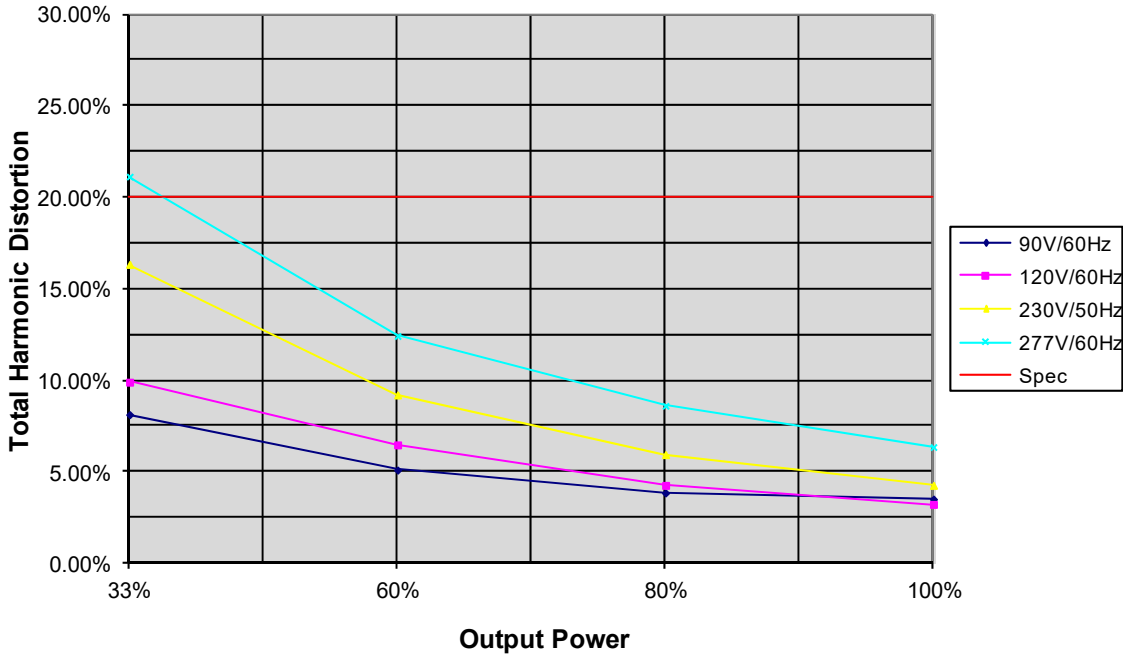

Efficiency Curve (Typical)

Efficiency vs. Output Power

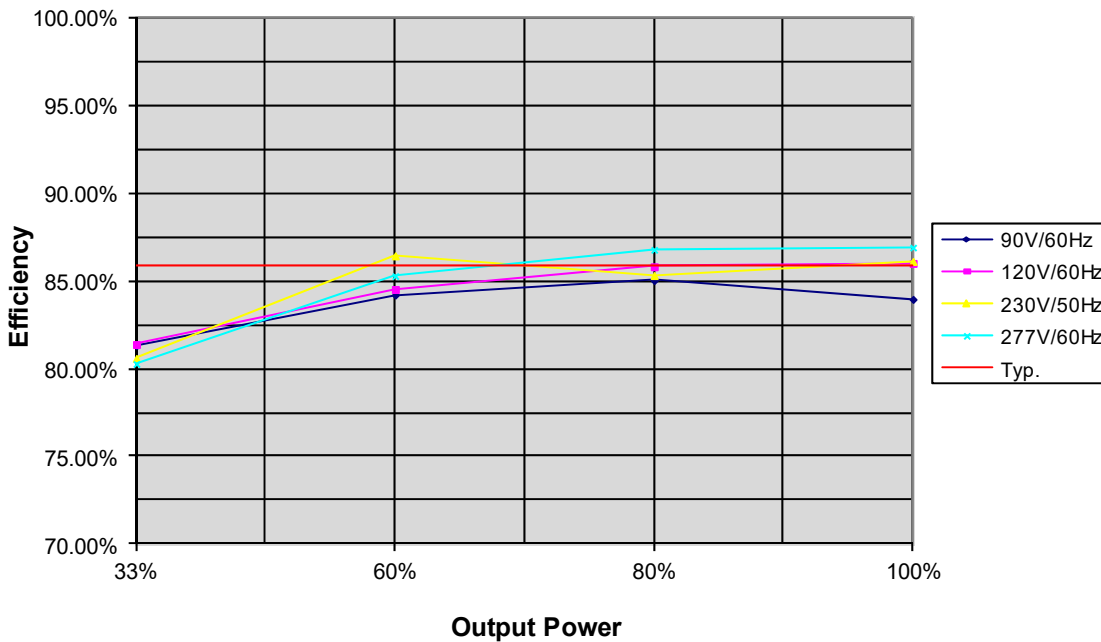

25W

LD25W-NN Series

CONSTANT VOLTAGE




LED Optimized Drivers

25 Watt - LD25W-NN Series

CONSTANT VOLTAGE LED DRIVER


Life vs. Ambient Temperature

LD25W Estimated Life Full Load @ 120Vac

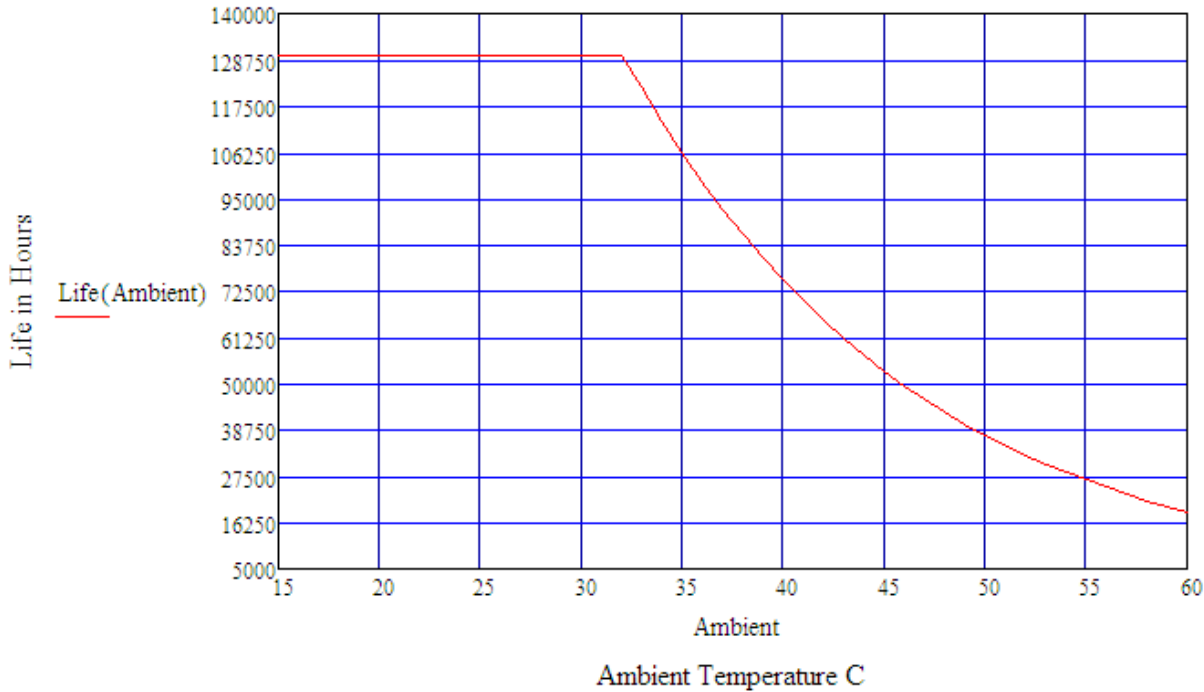

Life vs. Case (Tc) Temperature

LD25W Estimated Life Full Load @ 120Vac

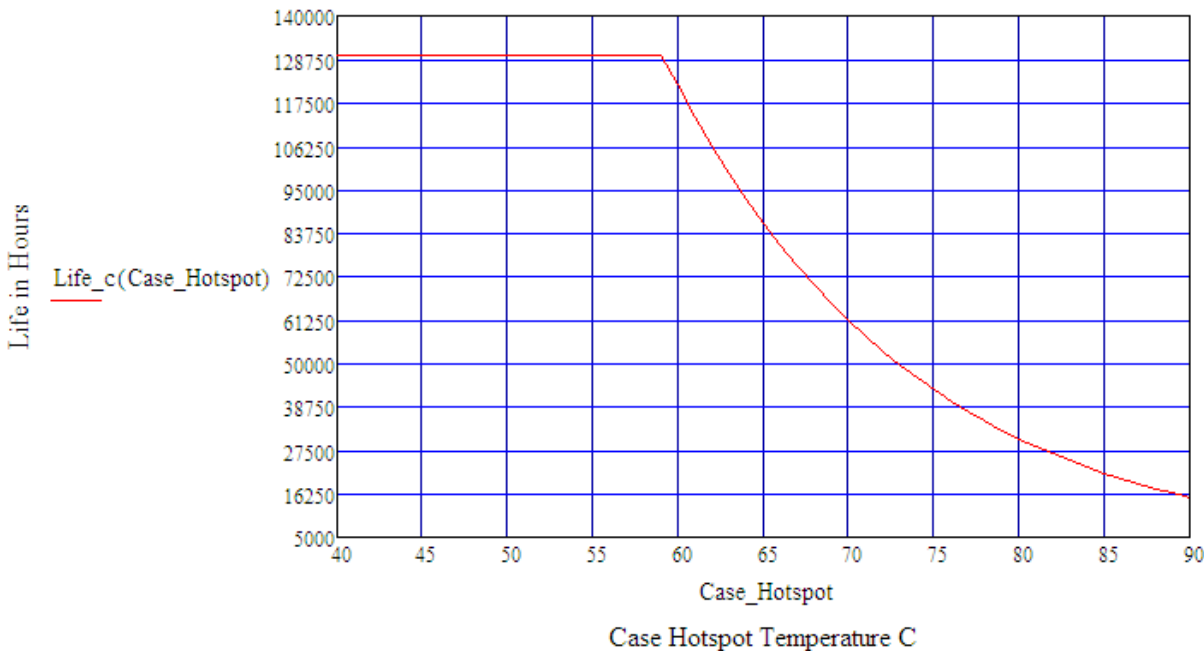



LED Optimized Drivers

25 Watt - LD25W-NN Series

CONSTANT VOLTAGE LED DRIVER

CONSTANT VOLTAGE
LD25W-NN Series
25W

Revision History

REV - Change Date	Description of Changes		
	Items	Changed From	Changed To
REV E1.2 - 11/01/2020	Update to comply with UL8750	Original E1.2	Constant Voltage