

## 150 Watt- LPF150W-NN-PCXXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX



PROGRAMMABLE

**150W**  
LPF150W

### Model: LPF150W Series

- Drive Mode: Flicker Free Programmable Constant Current
- Output Voltage: 55VDC, 200VDC or 300VDC
- Output Current: GUI Programmable
- Programmable Output Current (POC): See table below
- 0-10V Linear or LOG Dim Curves, Dimming 1% - 100%<sup>(B)</sup>
- Dim to Zero? YES/NO setting, Standby Power  $\leq 0.5W$ .<sup>(C)</sup>
- Soft Start? YES/NO setting.<sup>(D)</sup>
- Auxiliary Output: 12V @ 200mA Max.

### Environmental

1. Operating temperature: Tc 90C Maximum. Reference -40 to +50°C ambient
2. UL Listed, UL Class P, UL Type HL
3. Storage temperature range: -40 to +85°C
4. Humidity (non-condensing): 5% - 95%RH
5. Cooling: Convection
6. Vibration Frequency: 5-55Hz/2g, 30 minutes
7. Impact resistance: 1g/s
8. MTBF@ 25°C: 360,000 hours @ Full Load per MIL-HDBK-217F Notice 2.

### Safety and Compliance

1. UL8750, EN61347, CSA22.2 listed, UL Class P, Type HL
2. FCC, 47CFR Part 15, 120Vac Class B, 277Vac Class A
3. Water resistant and Dust Proof Design: IP67, NEMA4, for Dry & Damp Locations.
4. Rectangular style aluminum case.
5. Safety Isolation between Primary, Secondary & 0-10V Dim
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: Output over-current, Output short circuit, Over Temperature, auto-recovery.
8. EN61000-4-5: 6kV/10kV 8/20  $\mu$ sec transient protection.

### Electrical Specifications at 25°C

- Input voltage range: 120-277Vac (Full range 100 to 305Vac)
- Frequency: 47 - 63HZ
- THD%:  $\leq 20\%$  at 120/230/277Vac  $\geq 50\%$  Load
- Power Factor:  $\geq 0.90$  at 120/230/277Vac  $\geq 50\%$  Load
- Inrush current:  $\leq 52A$  at 25C, 120Vac, cold start, Max. Load
- Input current: 1.60A Maximum @ 120Vac
- Efficiency: 88% typical at 230Vac Full Load
- Constant Current regulation:  $\pm 2\%$  Over Input Line Variation
- Load regulation accuracy:  $\pm 3\%$
- Leakage current: 750uA Max. @ 277Vac

### Programmable Parameters

-RD Set using EP-PRG-01 Programmer, -RDNFC Set using FEIG CPR30+ Programmer & EPtronics GUI Software.


Programmable Parameter	Programmable Minimum Value	Programmable Maximum Value	Factory Default	GUI Programmable
Output Constant Current (Iout) <sup>(A)</sup>	See Table	See Table	Maximum	YES
Disable Dimming?	NO	YES	NO	YES
Dimming Curves: LINEAR or LOG <sup>(B)</sup>	1% (Min Dim)	N/A Fixed 100%	LIN, 1% (Min Dim)	YES
Dim to Zero? <sup>(C)</sup>	NO	YES	NO	YES
Soft Start? <sup>(D)</sup>	NO	YES	NO	YES
NTC Minimum Ohms <sup>(3)</sup>	1K $\Omega$	10K $\Omega$	2K $\Omega$	YES
NTC Minimum %Iout <sup>(3)</sup>	~ 0%	100%	~ 10%	YES
NTC Maximum Ohms <sup>(3)</sup>	2K $\Omega$	10K $\Omega$	6.3K $\Omega$	YES
Constant Lumen Output Lookup Table	1kHours/50% Iout	254k Hours/100%, Max 8 entry Lookup Table	Disabled	YES
End of Life Indicator	1k Hours	254k Hours	Disabled	YES

**A. Output Current:** Programmable Output Current (POC): Per table, Power limited to 150W by Voltage foldback.

**B. Minimum Dimming current:** If Dim to Zero = NO then Min Dim is 3mA or 1%, or % Set whichever is greater.

**C. Dim to Zero?:** If YES then will always dim to 0mA at Vdim  $\leq 1.00V$  regardless of Min Dim% Setting.

**D. Soft Start?:** See page 8. NO, startup <500ms. YES, time to first light (100mA) <500ms, aesthetic fade on to 100% programmed Iout will be ~ 3500ms. Start-up time & Soft Start time are set to meet CA Title 24-2016.



### Programmable Constant Current Versions

Part Number <sup>(1) (4)</sup>	UL Types	Output Voltage Range	Output Constant Current <sup>(2)</sup>	Current Accuracy	Output Power Maximum <sup>(2)</sup>	Typical Efficiency <sup>(1)</sup>
LPF150W-55-PC4200-RD	Class P, Type HL	10 - 55 VDC	500 mA to 4200 mA	$\pm 5\%$	150W	89%
LPF150W-200-PC2200-RD	Class P, Type HL	36 - 200 VDC	300 mA to 2200 mA	$\pm 5\%$	150W	90%
LPF150W-300-PC1400-RD	Class P, Type HL	54 - 300 VDC	200 mA to 1400 mA	$\pm 5\%$	150W	91%

- Notes:**
1. Typical efficiency measured at 230VAC input, Iout full load
  2. Keep POC (Programmable Output Current) within 75W Maximum Power Operating Window. Refer to Power Operating Window graph on page 8. Part will foldback output current to maintain power limit.
  3. NTC Minimum value set must not exceed 70% of Maximum value set. See page 9 for NTC graph.
  4. Wireless Programming Version add NFC at end of part number. i.e. -RDNFC = Wireless Programming, -RD = wired programming

**150W**  
**LPF150W**

PROGRAMMABLE



**LED Optimized Drivers**

# 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

**-RD: Wire Programmable Version with NTC**

## Mechanical Dimensions: Inches [mm]

Material: Clear Anodized Aluminum Housing Fully Encapsulated  
Weight: 36.2 oz (1025 grams) Typical  
Case must be grounded in end use application.

## Labeling Example

**LED Optimized Programmable LED Driver**  
EPtronics, Inc.  
www.EPtronics.com  
800.643.0688/10.636.0700

Part Number: LPF150W-55-PC4200-RD  
Input Voltage: 120-277VAC 50/60Hz  
Input Current: 2.00 Amp Max  
Output Voltage: 10-55 VDC , 150W Max  
Output Current (POC): 500-4200 mA (Default 4200mA)  
Programmable via NTC (P+) Wire  
UL & cUL Class 2 0-10V CCR Programmable Dimming  
Isolated Class 2 Dim suitable for Class 1 or Class 2 circuit  
UL Type HL, Suitable for use in Dry & Damp Locations  
UL Class P, For Connections use wire rated  $\geq 90C$  (194F)

IP67

DC OUTPUT  
LED+ = RED  
LED- = BLUE

12V OUTPUT & GUINTC  
12V@200mA = YELLOW  
SCOM (P-) = BLACK  
NTC (P+) = BROWN


0-10V DIMMING  
DIM+ = VIOLET  
DIM- = PINK

AC INPUT  
LINE = BLACK  
NEUTRAL = WHITE  
(PE) GND = GREEN/YEL.

UL LISTED E325626

RoHS

Made in China REV. A

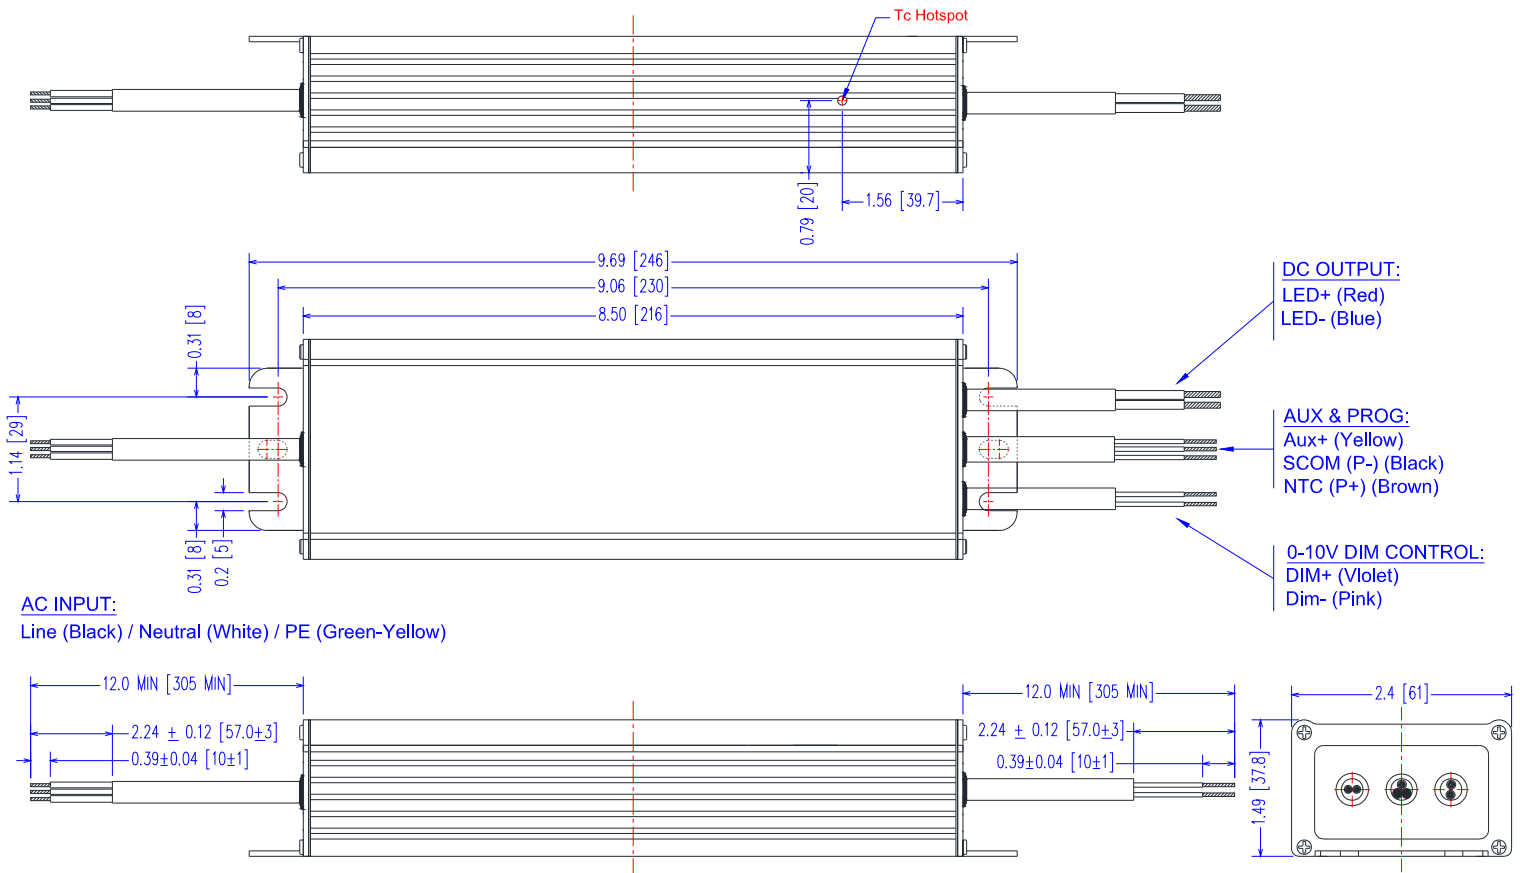

Case Parameter	Inches [mm]
Length	9.69 [246]
Width	2.40 [61.0]
Height	1.50 [37.8]
Nominal Mount Dimensions	9.06 [230] L x 1.14 [29] W

## LED wiring distance:

Recommended maximum wiring distance:  
35.7V@4200mA with ~5% Vout Drop.

AWG	#22	#21	#20	#19	#18	#16
Distance (m)	4.0	5.1	6.4	8.0	10.1	16.1
Distance (ft)	13.2	16.6	20.9	26.4	33.3	52.9

## 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

**-RDNFC: NFC Wireless Programmable Version with NTC**

### Mechanical Dimensions: Inches [mm]

Material: Clear Anodized Aluminum Housing Fully Encapsulated  
 Weight: 36.2 oz (1025 grams) Typical  
 Case must be grounded in end use application.

### Labeling Example

**LED Optimized Programmable LED Driver**  
 EPtronics, Inc.  
 www.EPtronics.com  
 800.643.0688 / 810.536.0700

Part Number: LPF150W-55-PC4200-RDNFC  
 Input Voltage: 120-277VAC 50/60Hz  
 Input Current: 2.00 Amp Max  
 Output Voltage: 10-55 VDC , 150W Max  
 Output Current (POC): 500-4200 mA (Default 4200mA)  
 NFC Programmable  
 UL & cUL Class 2 0-10V CCR Programmable Dimming  
 Isolated Class 2 Dim suitable for Class 1 or Class 2 circuit  
 UL Type HL, Suitable for use in Dry & Damp Locations  
 UL Class P, For Connections use wire rated  $\geq$  90C (194F)

IP67

CE, FC, DC OUTPUT  
 LED+ = RED  
 LED- = BLUE


UL LISTED E325626  
 12V OUTPUT & NTC  
 12V @ 200mA = YELLOW  
 SCOM = BLACK  
 NTC = BROWN

0-10V DIMMING  
 DIM+ = VIOLET  
 DIM- = PINK

AC INPUT:  
 LINE = BLACK  
 NEUTRAL = WHITE  
 PE (GRN) = GRN/VEIL

YG

Made in China REV. A

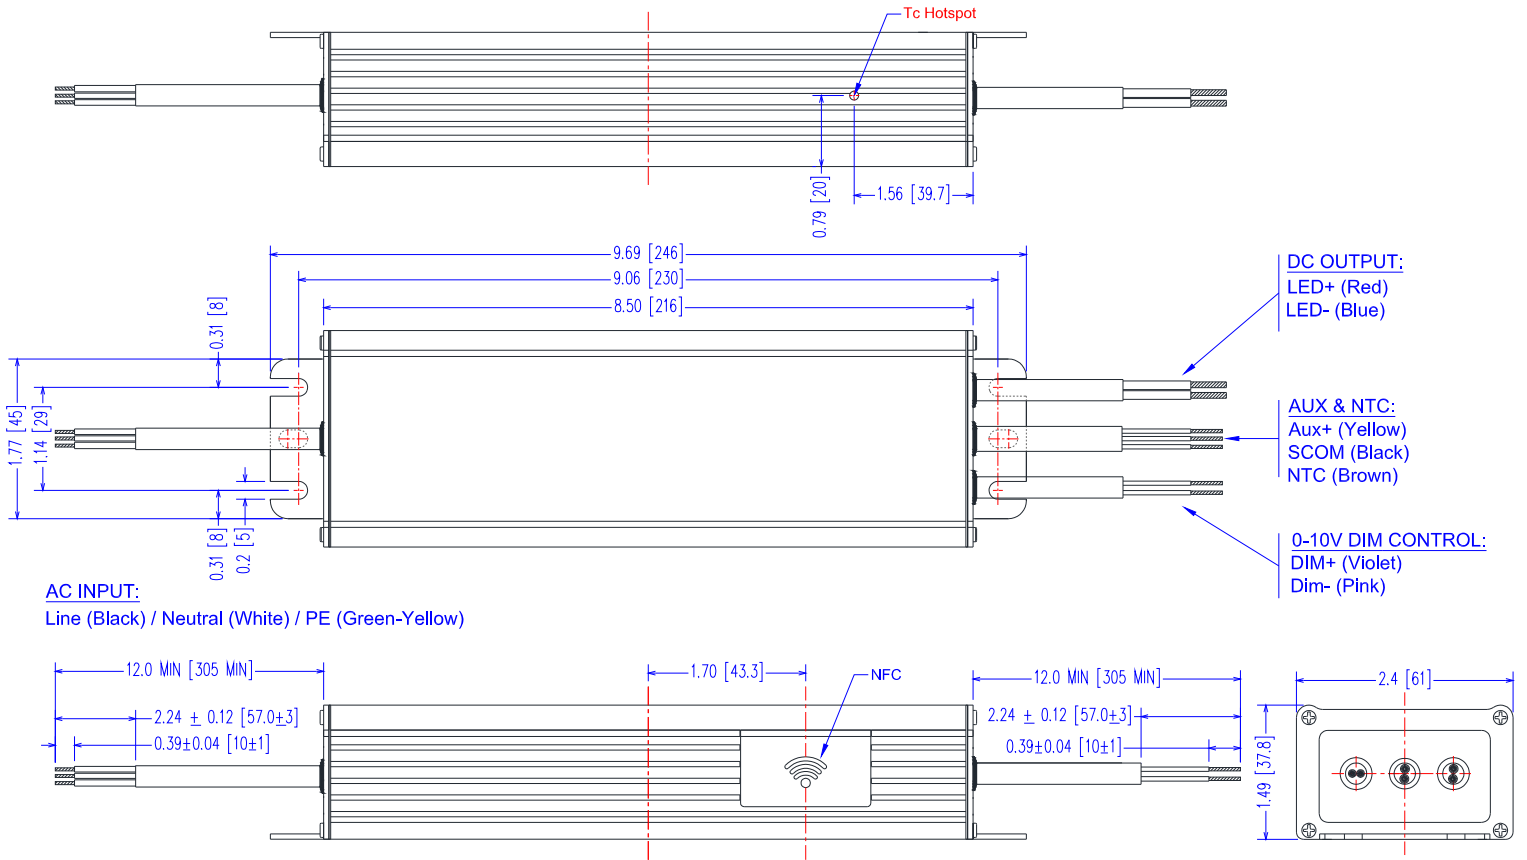

Case Parameter	Inches [mm]
Length	9.69 [246]
Width	2.40 [61.0]
Height	1.50 [37.8]
Nominal Mount Dimensions	9.06 [230] L x 1.14 [29] W

### LED wiring distance:

Recommended maximum wiring distance:  
 35.7V@4200mA with ~5% Vout Drop.

AWG	#22	#21	#20	#19	#18	#16
Distance (m)	4.0	5.1	6.4	8.0	10.1	16.1
Distance (ft)	13.2	16.6	20.9	26.4	33.3	52.9

# 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX


## -RD, 0-10V & Resistance Dimming Scheme

Parameters	Minimum	Typical	Maximum
12V Auxiliary Output	11V	12.0V	13.0V
12V Auxiliary Output Source Current	0mA	—	200mA
Absolute Voltage Range on 0-10V Input (VIOLET Wire)	-2.0V	—	+15V
Source Current out of 0-10V Input (VIOLET Wire)	0uA	—	250uA


## Notes

1. Part comes with 12V auxiliary & 12VCOM. 12V return is connected to 12VCOM. Isolated DIM+, DIM-.
2. Part is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended dimmer is Leviton IP710 or equivalent connected between DIM+, VIOLET and DIM- PINK wires.
3. Output will be 100% with DIM+/DIM- open and Minimum Programmed Value, or OFF with DIM+/DIM- Shorted.
4. Minimum dimming level & Dim to Zero? are programmable with EPtronics LED Driver Interface Programming Tool.

## -RD 2-Wire Resistance Dimming Scheme

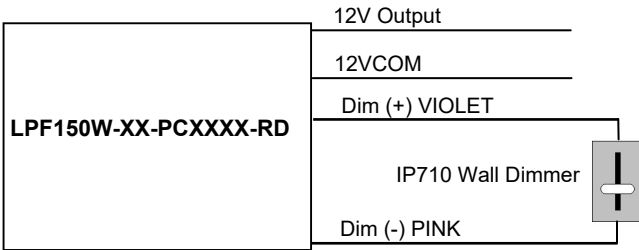


## -RD 2-Wire 0-10V Dimming Scheme

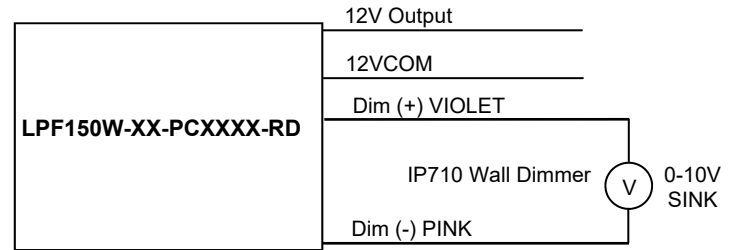

## Typical Dimming Curves: Dim to Zero? = YES

**% Output Current Vs. 0-10V DC Dimming Input**

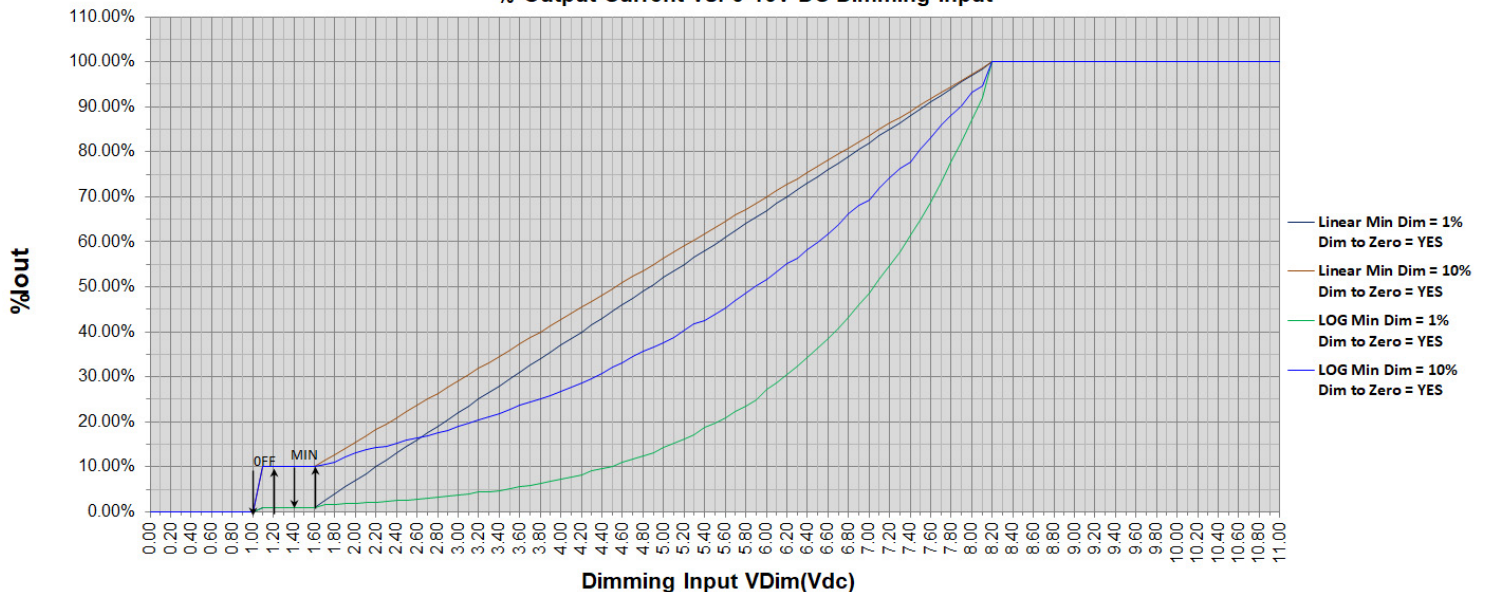

## 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

### Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	100 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	1.60 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.74 A	Measured at 277Vac/60Hz Input, Output Full load.
Inrush Current (Peak) Ipk 10%Pw ≤270usec	—	—	52 A	Measured at 120Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start
	—	—	130 A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start
Leakage Current	—	—	0.50 mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75 mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at 120/230/277Vac ≥ 50% Load
Power Factor (PF)	0.90	—	—	Measured at 120/230/277Vac ≥ 50% Load
Standby Power (Dim to Zero)	—	—	0.5W	Measured at 120/230/277Vac, Dimmed to Zero (Vdim ≤0.9V)

### Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Table on Page 1
DC Output Current (POC)	-5%	Per Table	+5%	Programmable Output Current (POC) POC is set using GUI
Output Power	—	—	150W	Voltage Foldback, See graph on page 8
Ripple & Noise (Vpk-pk)	—	—	3% Vo	20 MHz BW, Full load output in parallel with 0.1 μF ceramic & 10 μF Electrolytic.
Ripple (Ipk-pk)	—	—	5% Io	20 MHz BW, Full load output in parallel with 0.1 μF ceramic & 10 μF Electrolytic. 120 Hz component (Flicker Free)
Start-up Time	—	—	500 mS	Measured at 98% of Iout, 120Vac/60Hz Input, Output Full Load.
Hold-up Time	—	30 mS	—	Typical @ 277Vac Input, Output Full load.
Auxiliary Output (V)	11	12	13	@ 200mA Maximum

### Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (Tc)	-40 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (Ta)	-40 °C	—	+50 °C	This is a reference range. Tc controls temperature range.
Storage Temperature (Ts)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	—	360,000 Hours	—	MIL-HDBK-217F Notice 2, Ta = 25C, Output Full Load.

### Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+10% Io	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	+7% Vo	No Damage, Requires AC Power Cycle after fault is removed.
Output Power Limit (OPL)	—	—	150W	Current Foldback
Over Temp Protection (OTP)	95 °C	—	100 °C	Foldback at Tc ≥95C, 1% Iout @ Tc ~110C

**150W**  
LPF150W

PROGRAMMABLE



**LED Optimized Drivers**

# 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

## Safety Compliance


Safety	Notes/Standards
UL/CUL Listed UL Class P	UL8750 & CAN/CSA C22.2 No. 250.13, UL Class P, UL Type HL
CE	EN61347-1, EN61347-2-13, EN62493
Dielectric Withstand Voltage	Input to Output & Dimming: 3750 Vac (CE, ENEC covers UL 2000V requirement)
	Dimming to Output: 2500 Vac
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
0-10V Class 2 Isolated Dimming Circuit	Dim+ VIOLET/Dim- PINK are Class 2 Isolated from all other inputs & outputs. 0-10VDC Dimming suitable for Class 1 or Class 2 circuit.
FG	The metal case of the driver must be connected to earth ground (FG) in the end-use application.
Sound Rating	<24dB Class A @ 1 Meter

## EMC Compliance

Standard	Notes/Conditions
FCC, 47 CFR Part 15 ANSI C63.4	Class B @120Vac, Class A @ 277Vac
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 6 kV L-N, 10 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

## Power Factor Curves (Typical)

**PF vs. Output Power**

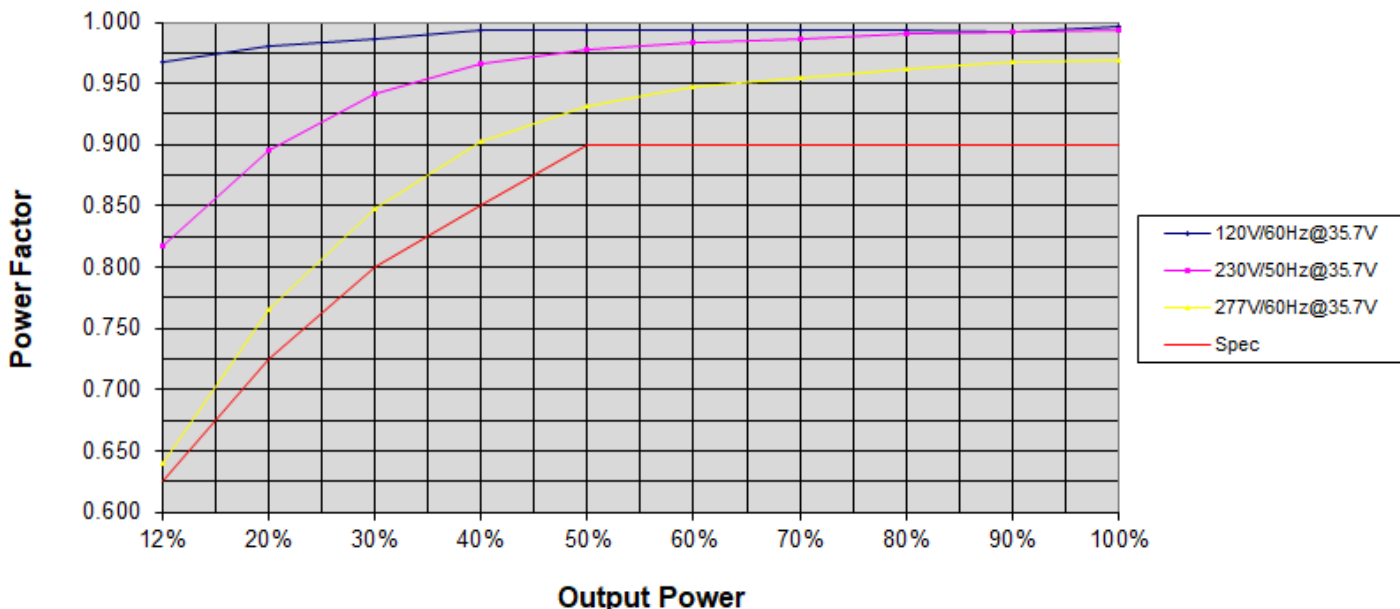


## 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

PROGRAMMABLE  
LPF150W  
**150W**


### THD Curves (Typical)

#### THD vs. Output Power

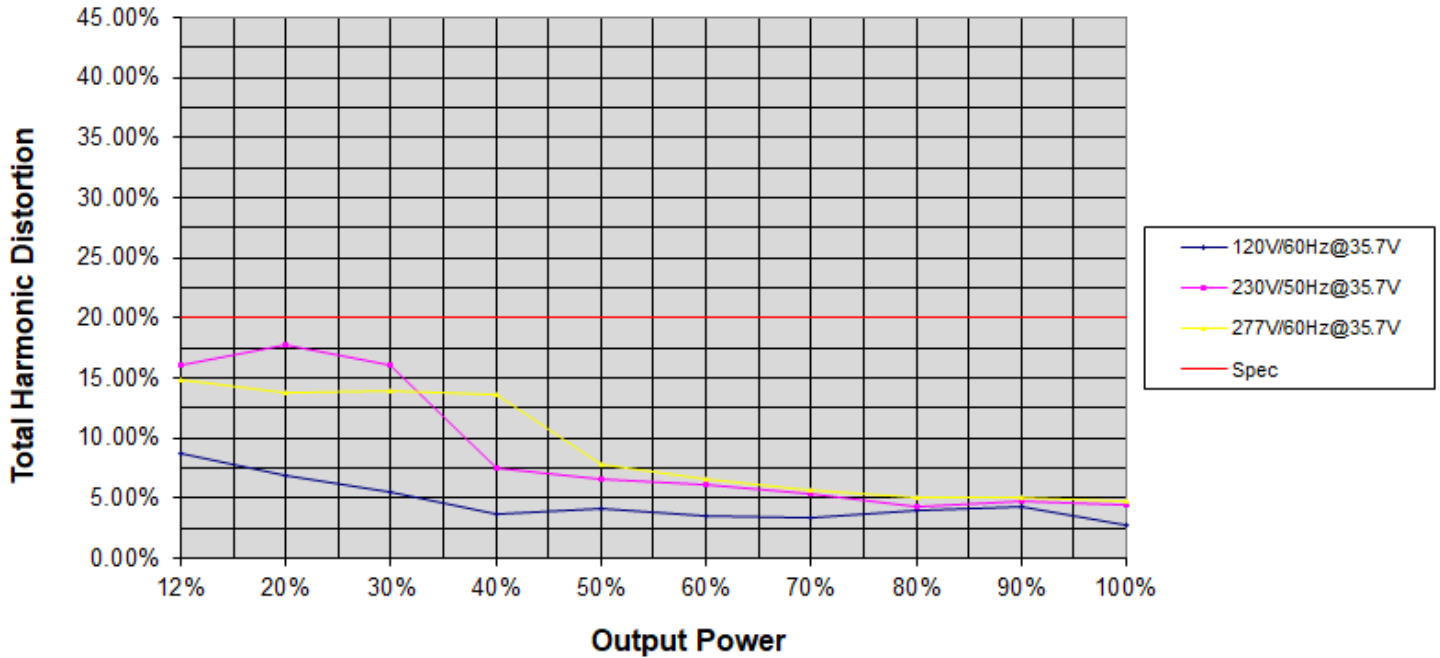

### Efficiency Curves (Typical)

#### Efficiency vs. Output Power

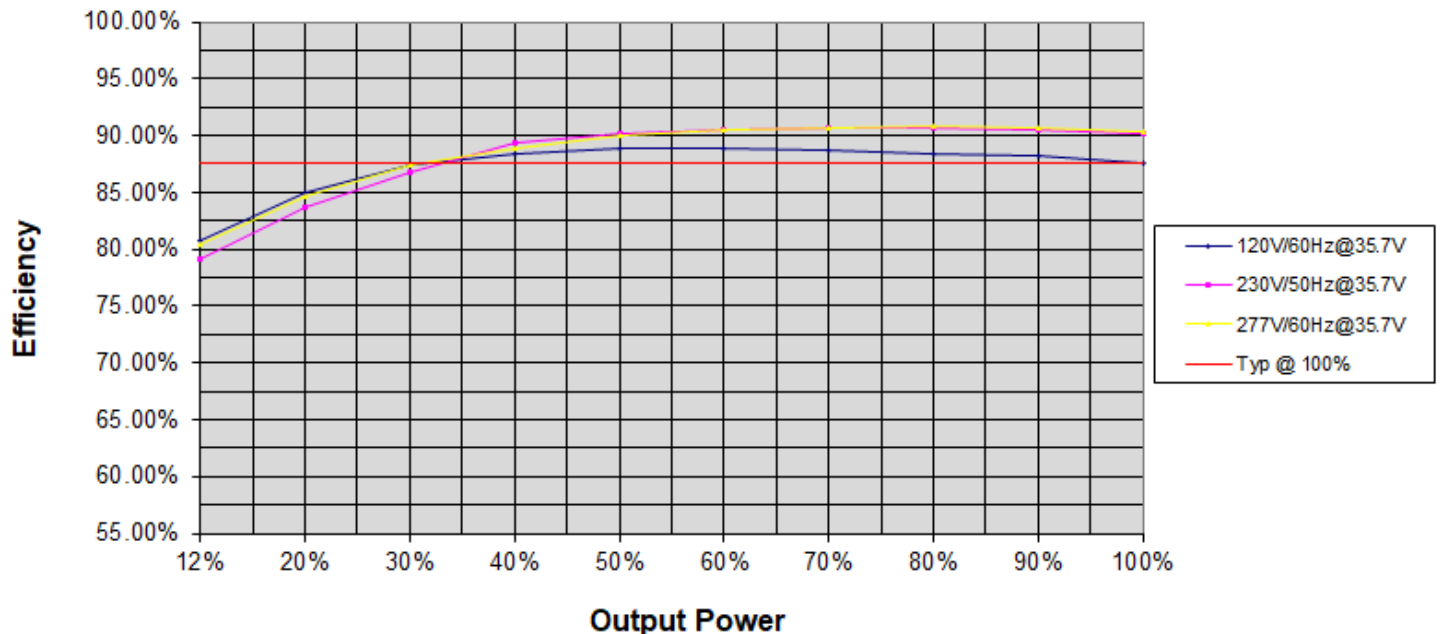


# 150 Watt- LPF150W-NN-PCXXX-RD


FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

## Power Operating Windows


**LPF150W-55-PC4200-RD OPERATING WINDOW**  
Vout (Vdc) vs. Output Current (mA)

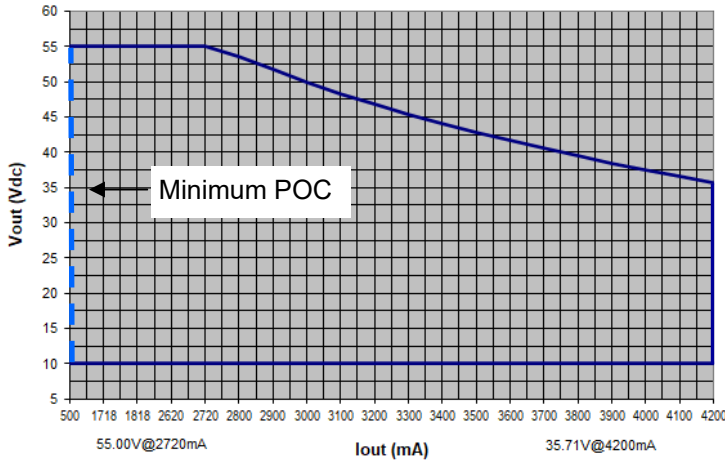

**LPF150W-200-PC2200-RD OPERATING WINDOW**  
Vout (Vdc) vs. Output Current (mA)

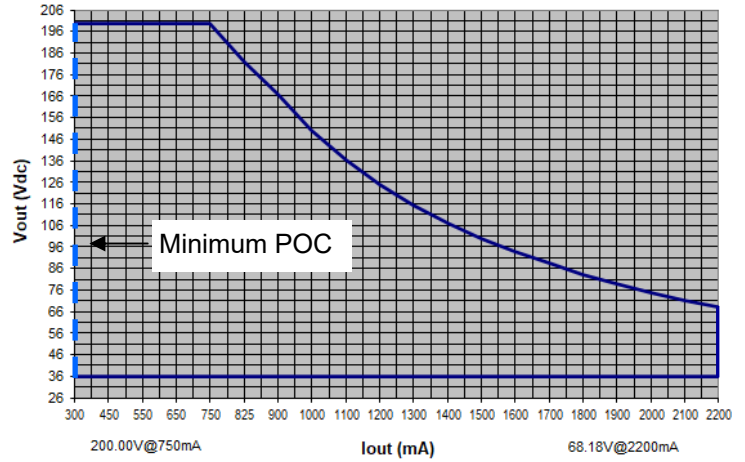


**LPF150W-300-PC1400-RD OPERATING WINDOW**  
Vout (Vdc) vs. Output Current (mA)

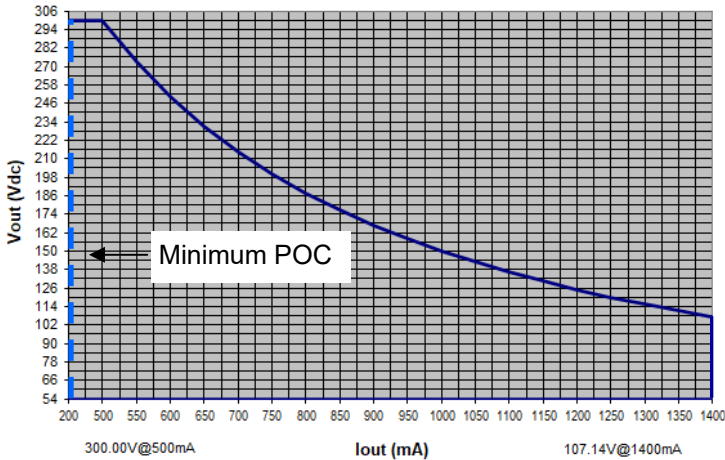

## Soft Start Operation:

Specification: Time-To-First-Light (100mA) <500ms, Time to 90% Iout ~ 3 Seconds, Time to 100% Iout <4.0 Seconds

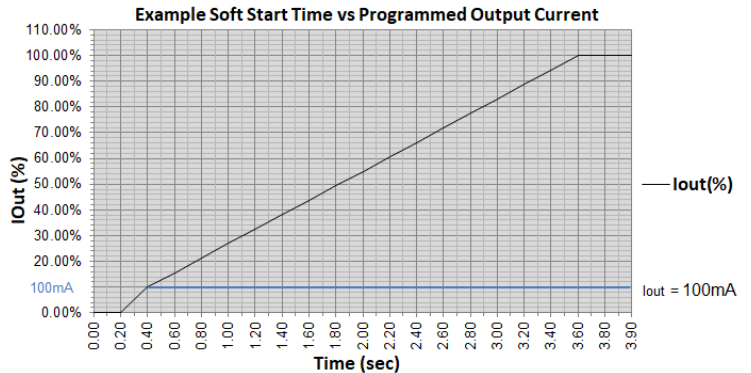



## 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX


### -RD Version Temperature Protection using External NTC

**Example:** NTC High, NTC Low and NTC Minimum Iout% can be programmed using EP Programmer USB interface & EPtronics PC based GUI Software.

Factory Default Settings: NTC Low = 2.0K  $\approx$  10% Iout, NTC High = 6.3K, 100% Iout

Programmable settings: NTC Minimum Level (%), NTC Minimum Ohms, NTC Maximum Ohms.

**Output Current (%) vs. NTC (Ohms)**

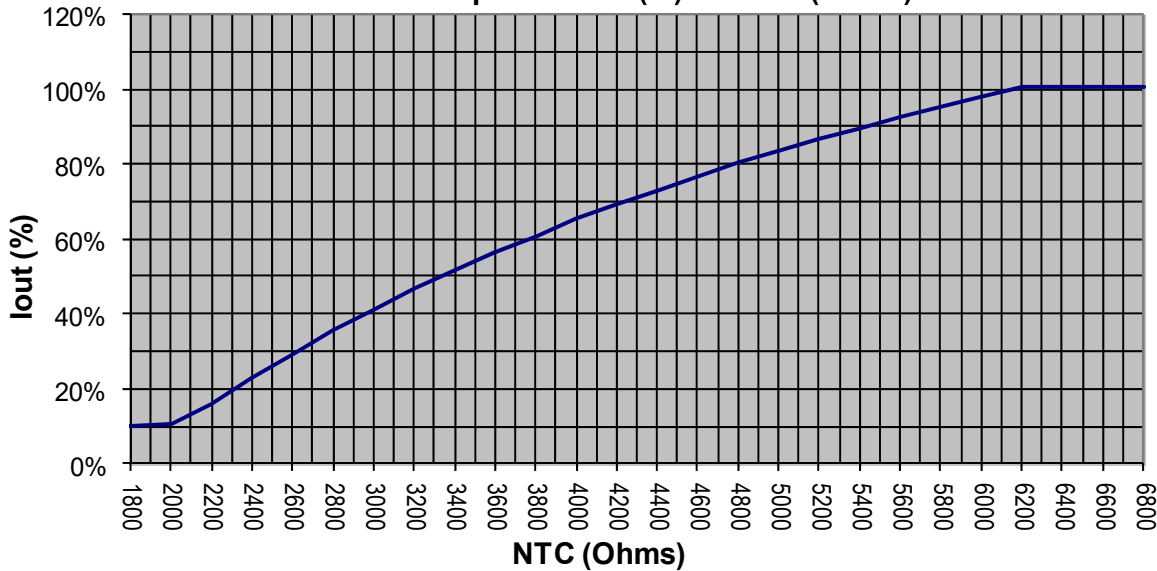


### -RD Version Temperature Protection Example

NTC = 805SMD,  $R_{25C} = 15K \text{ Ohm} \pm 2\%$ ,  $R_{64C} = 3700$ , Vishay Part#: NTCS0805E3153GMT

With part set: NTC Max = 6.3K, NTC MIN = 2.0K, Iout Min = 10%

**Output Current (%) vs. NTCS0805E3153GMT NTC Temp ( $^{\circ}C$ )**

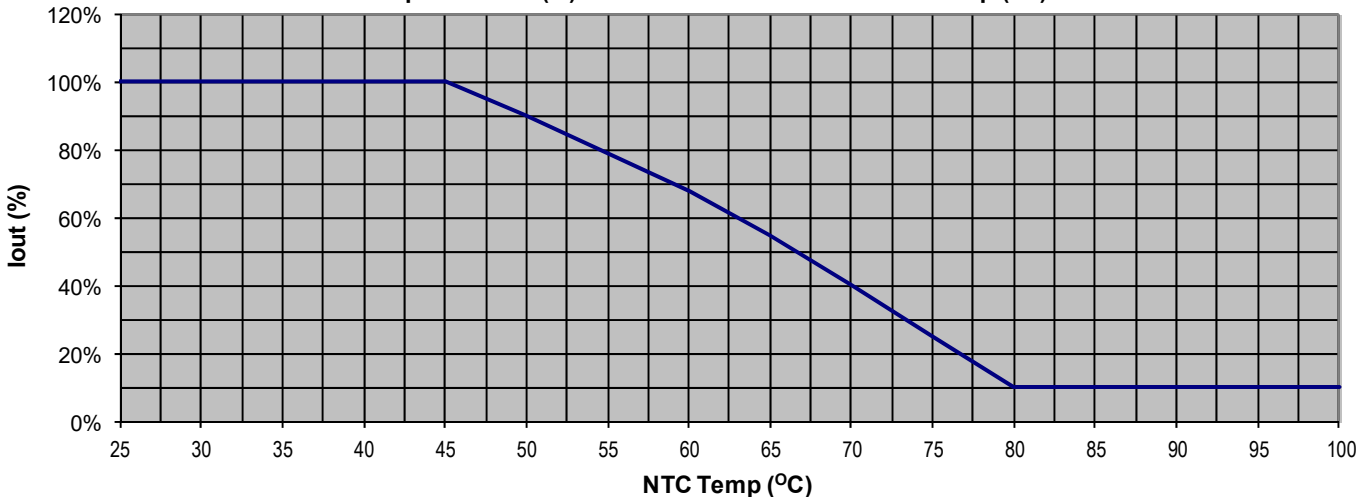

150W  
LPF150W

PROGRAMMABLE



LED Optimized Drivers

# 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

## EPtronics LED Driver Interface Programming Tool: PC Based Software

**Programmable Output Current (POC):** Programmable Iout Per table page 1

**Programmable NTC settings:** NTC Minimum Level (%), NTC Minimum Ohms, NTC Maximum Ohms.

Factory Default: NTC Minimum = 2.0K,  $\approx$  10% Iout, NTC Maximum = 6.3K, 100% Iout

**Programmable dimming curve:** Linear or LOG

Factory Default: Linear Dimming Curve

**Programmable Minimum Dim Level:** 1% (Min Dim) to 100% Iout programmed value.

Factory Default: Min dim level 1% (Actual Min Dim per specifications)

**Programmable Dim to Zero?:** YES or NO. YES will cause 0mA at  $\leq$ 1.0V, else will be Minimum Dim Level.

Factory Default: NO

## EPtronics LED Driver Interface Programming Tool:

The EPtronics LED Driver Interface Programming Tool is a programming and configuration tool for EPtronics intelligent programmable LED drivers. It consists of the EP Programming Interface (EP-PRG-01) which is connected between the USB port of a computer and the LED driver being programmed, and the EPtronics LED Driver Interface Programming Tool software. The EPtronics LED Driver Interface Programming Tool software is a PC based graphical user interface that allows the user to program and configure the operating parameters of an EPtronics Programmable LED Driver. This interface allows the operator to set the LED drivers output current within its specified range, in the increments specified. It also provides the ability to enable/disable and control features like "Dimming", "Auxiliary Output", "NTC Thermal Protection", "Constant Lumen Module" & "End-of-life indicator" when available in the EPtronics intelligent LED driver being programmed.

**EP Programming Interface:** (EP-PRG-01 Wired or EP-PRG-NFC for wireless)


is the physical USB unit connected between the USB port of a computer and the LED driver being programmed. This unit also provides all power required to the LED driver being programmed. No connection to an AC power source is required for programming the LED driver.

## EPtronics LED Driver Interface Programming Software:

The EPtronics LED Driver Interface Programming software is the windows based GUI that allows the user to assign custom part numbers to the LED driver being programmed. The user can then save the profile to a computer disk and recall as needed. The user can then use the "Auto Program" feature to quickly program as many LED drivers with the saved profile as is required. Each driver programming simply requires a click of the mouse to program in a single step or the use of an EPtronics Programming Cradle which will auto program upon insertion the an LED driver into the cradle.

The EPtronics LED Driver Interface Programming software supports bar code scanners. The barcode scanner can be used to automate the programming of the attached LED driver. This barcode scanner interface also provides an option to either enable or disable logging of the parameters to an excel file.

*Note: The programming of the LED driver does not require the input be connected to an AC power connection. The EP Programming Interface and the required LED driver circuitry will be powered from the EP-PRG-XXX module via the USB connection to a computer. For new GUI settings to take effect the AC input must cycled off/on and the USB interface disconnected.*

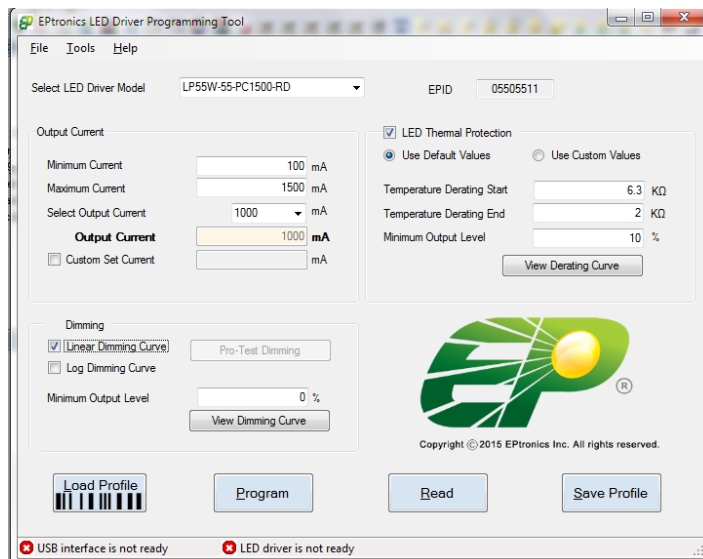


## 150 Watt- LPF150W-NN-PCXXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX


### Life vs. Ambient Temperature

LPF150W-XX-PCXXXX-RD Estimated Life Full Load @ 120Vac

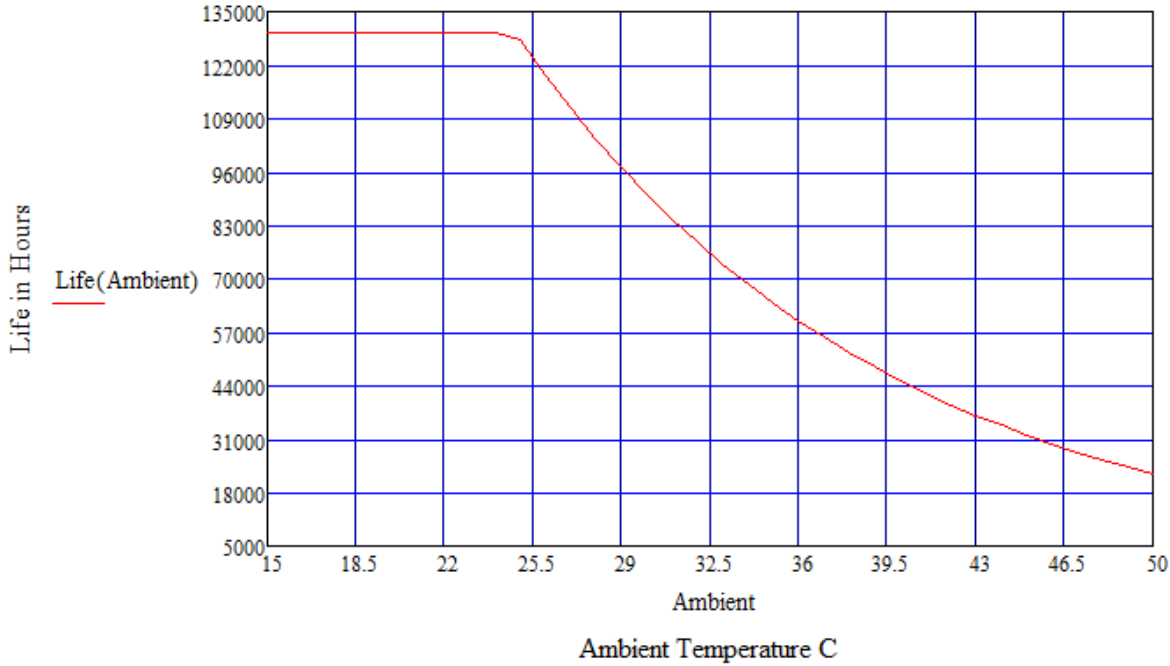

### Life vs. Case (Tc) Temperature

LPF150W-XX-PCXXXX-RD Estimated Life Full Load @ 120Vac

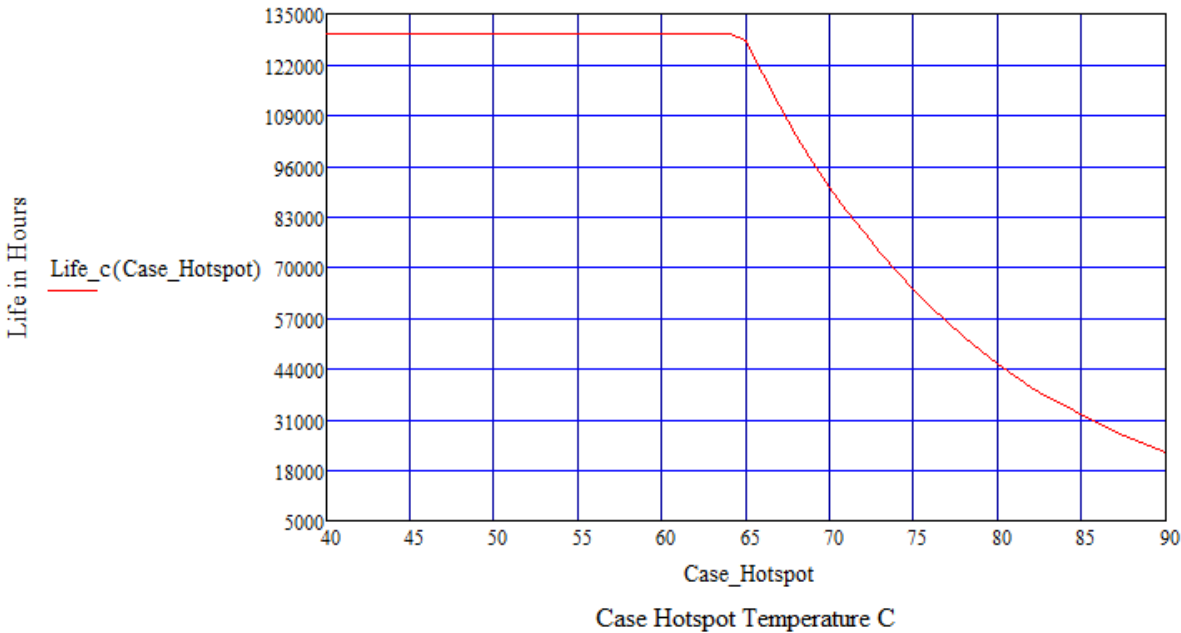

**150W**  
**LPF150W**

PROGRAMMABLE



**LED Optimized Drivers**

# 150 Watt- LPF150W-NN-PCXXX-RD

FLICKER FREE PROGRAMMABLE LED DRIVER WITH 0-10V DIMMING & 12V AUX

## Revision History

REV - Change Date	Description of Changes		
	Items	Changed From	Changed To
REV A - 10/20/2020	Initial spec release	N/A	N/A
REV A - 06/18/2021	DIM Wire Colors	PURPLE/GRAY	VIOLET/PINK, per NEMA 100
REV A - 01/12/2023	Soft Start	Soft Start Time to first light value 400mA	Soft Start Time to first light value. changed to 100mA