

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING



DIMMING
LP60W Series
60W

Model: LP60W Series

- Drive Mode: Constant Current or Constant Voltage
- Technology: PFC Corrected 2-Stage Switch Mode
- Output Power: 60W Max.
- Input Voltage: 90 to 305VAC, 47- 63Hz
- Number of Outputs: One
- Output Voltages: 4VDC - 214VDC
- Output Currents: 280mA - 5000mA
- Optional 0-10V or PWM Positive Dimming 10% ~ 100%

Environmental

1. Operating temperature: Tc 90C Maximum. Reference -30 to +65°C ambient
2. UL Type TL (Tref Max/Meas. Tref): UL Class 2 86/63°C, UL Non Class 2 90/81°C
3. Storage temperature range: -40 to +85°C
4. Humidity (non-condensing): 5% - 95%RH
5. Cooling: Convection
6. Vibration Frequency: 5-55Hz/2g, 30 minutes
7. Impact resistance: 1g/s
8. MTBF@ 40°C: 474,000 hours @ Full Load per MIL-217F Notice 2.



Safety and Compliance

1. UL8750, EN61347, CSA 22.2, UL Type TL & HL recognized.
2. FCC, 47CFR Part 15 Class B certified
3. Water resistant and Dust Proof Design: IP66, NEMA6, for Dry, Damp, Wet Locations.
4. Compact Miniature, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV/4kV 8/20 µsec surge protection.

Electrical Specifications at 25°C

- Input voltage range: 90 to 305VAC
- Frequency: 47- 63HZ
- Power Factor: ≥ 0.90 at $\geq 75\%$ Load, 120Vac/230Vac/277Vac 50/60Hz
- THD%: $\leq 20\%$ at $\geq 75\%$ Load, 120Vac/230Vac/277Vac 50/60Hz
- Inrush current: $<50A$ at 25C, 277V, cold start, Max. Load
- Input current: 0.80A Maximum
- Efficiency: 86% typical at 230Vac Full Load
- Line regulation accuracy: $\pm 3\%$
- Load regulation accuracy: $\pm 4\%$
- Leakage current: 400uA typical; Hold up time: half cycle

Constant Current Versions



IP66



Part Number ⁽²⁾	US Class 2	CN Class 2	UL Types	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LP60W-214-C0280	NO	NO	TL & HL	72 - 214 VDC	280 mA	$\pm 3\%$	60W	91%
LP60W-166-C0360	NO	NO	TL & HL	56 - 166 VDC	360 mA	$\pm 3\%$	60W	91%
LP60W-108-C0550	NO	NO	TL & HL	36 - 108 VDC	550 mA	$\pm 3\%$	60W	90%
LP60W-72-C0850	NO	NO	TL & HL	24 - 72 VDC	850 mA	$\pm 3\%$	60W	90%
LP60W-54-C1100	YES	YES	TL & HL	18 - 54 VDC	1100 mA	$\pm 3\%$	60W	88%
LP60W-48-C1250	YES	YES	TL & HL	16 - 48 VDC	1250 mA	$\pm 3\%$	60W	88%
LP60W-42-C1450	YES	YES	TL & HL	14 - 42 VDC	1450 mA	$\pm 3\%$	60W	86%
LP60W-36-C1670	YES	YES	TL & HL	12 - 36 VDC	1670 mA	$\pm 3\%$	60W	86%
LP60W-27-C2250	YES	YES	TL & HL	9 - 27 VDC	2250 mA	$\pm 3\%$	60W	85%
LP60W-24-C2500 ⁽⁵⁾	YES	YES	TL & HL	8 - 24 VDC	2500 mA	$\pm 3\%$	60W	85%
LP60W-20-C3000	YES	YES	TL & HL	7 - 20 VDC	3000 mA	$\pm 3\%$	60W	84%
LP60W-15-C4000	YES	YES	TL & HL	5 - 15 VDC	4000 mA	$\pm 3\%$	60W	84%
LP60W-12-C5000 ⁽⁵⁾	NO	NO	TL & HL	4 - 12 VDC	5000 mA	$\pm 3\%$	60W	84%

Notes

1. Typical efficiency measured at 230VAC input, full load
2. For dimmable versions add appropriate designator to the end of the part number: For Example: LP60W-15-C5000-RD is 0-10V or resistance dimmable version, LP60W-15-C5000-PD is PWM dimmable version.
-RD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.
-PD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
3. -RD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 3 for details.
4. -PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5kHz, 0-10V Pulse. See page 4 for details.
5. SAM Recognized.

60 Watt - LP60W Series
CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


Constant Voltage Versions

Part Number	US Class 2	CN Class 2	UL Types	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LP60W-214	NO	NO	TL & HL	214 VDC	88 - 280 mA	± 5%	60W	91%
LP60W-166	NO	NO	TL & HL	166 VDC	113 - 360 mA	± 5%	60W	91%
LP60W-108	NO	NO	TL & HL	108 VDC	175 - 550 mA	± 5%	60W	90%
LP60W-72	NO	NO	TL & HL	72 VDC	263 - 850 mA	± 5%	60W	90%
LP60W-54	YES	YES	TL & HL	54 VDC	350 - 1200 mA	± 5%	60W	88%
LP60W-48	YES	YES	TL & HL	48 VDC	390 - 1250 mA	± 5%	60W	88%
LP60W-42	YES	YES	TL & HL	42 VDC	448 - 1450 mA	± 5%	60W	86%
LP60W-36	YES	YES	TL & HL	36 VDC	525 - 1670 mA	± 5%	60W	86%
LP60W-27	YES	YES	TL & HL	27 VDC	700 - 2250 mA	± 5%	60W	85%
LP60W-24 ⁽⁵⁾	YES	YES	TL & HL	24 VDC	783 - 2500 mA	± 5%	60W	85%
LP60W-20	YES	YES	TL & HL	20 VDC	938 - 3000 mA	± 5%	60W	84%
LP60W-15	YES	YES	TL & HL	15 VDC	1250 - 4000 mA	± 5%	60W	84%
LP60W-12 ⁽⁵⁾	NO	NO	TL & HL	12 VDC	1563 - 5000 mA	± 5%	60W	84%

Mechanical Dimensions: Inches [mm]

Material: Black Aluminum Housing
Fully Encapsulated
Weight: 19 oz (538 grams) Typical

Labeling Example

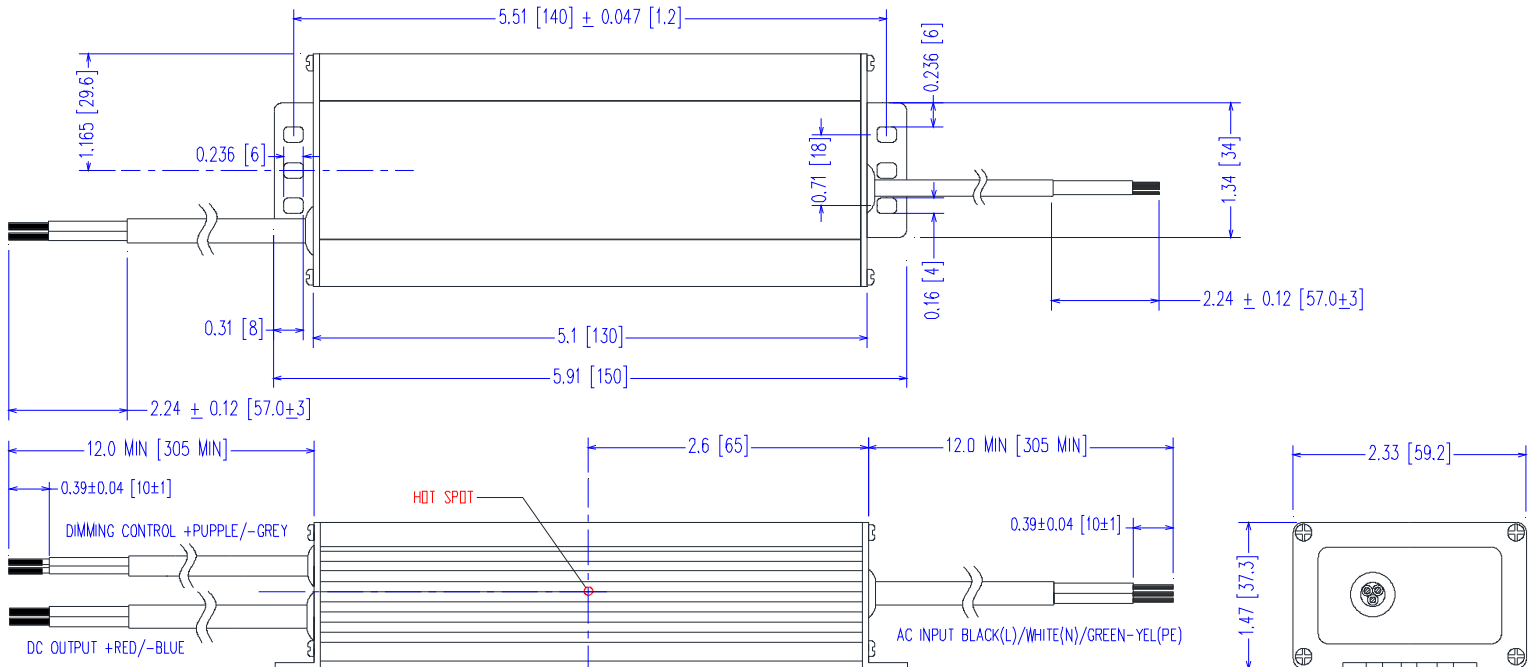

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LP60W Series
60W


-RD 2-Wire 0-10V CCR Dimming Scheme

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	—	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Sink Current into 0-10V Purple Wire	0mA	—	1.2mA


Notes

1. -RD 0-10V dimmable version comes with an extra two wires +Purple/-Grey on the output side.
2. -RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal.
Recommended wall slide dimmer is Leviton IP710 or equivalent
3. -RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
4. -RD 0-10V dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.


-RD 2-Wire Resistance Dimming Scheme

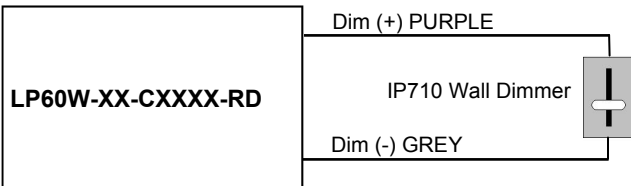

-RD 2-Wire 0-10V Analog Dimming Scheme

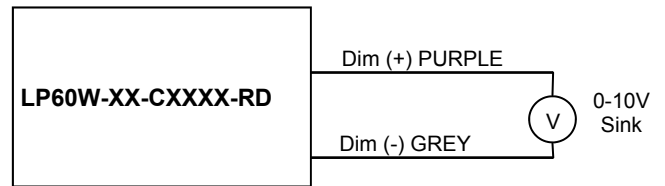

% Output Current vs. 0-10VDC Dimming Input

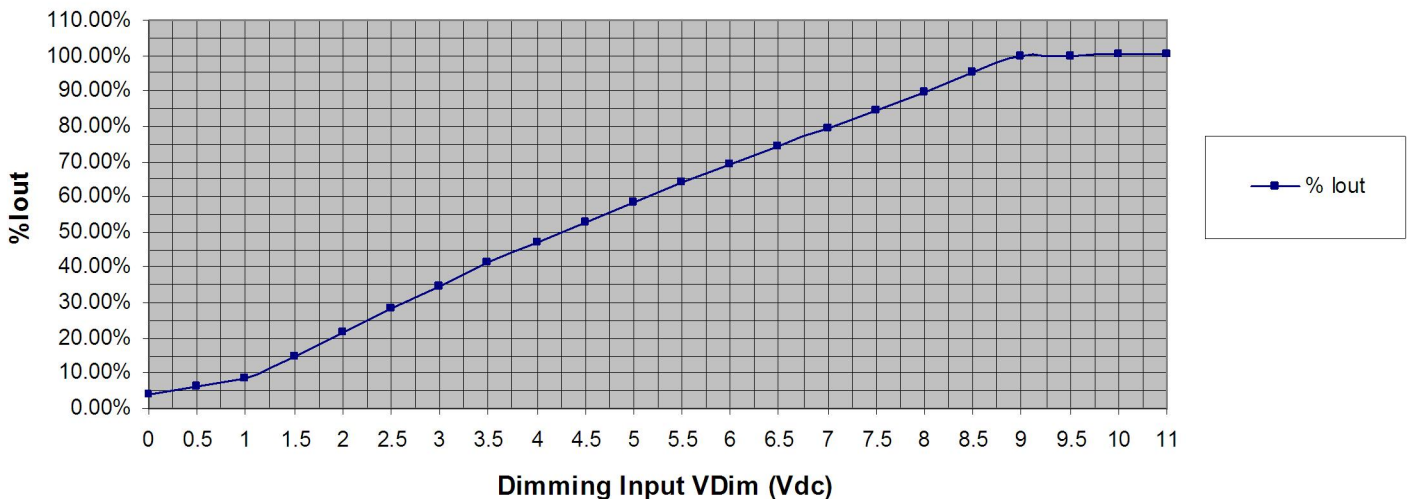

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


-PD 2-Wire CCR PWM Positive Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0V	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0V	10V	+15V
Current into PWM Input (Purple Wire)	0mA	—	1.2mA
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%


Notes

1. -PD PWM Dimmable version comes with an extra 2 wires +Purple/-Grey on the output side.
2. -PD PWM Dimmable version is not intended to dim below about 5% @ 0% Duty Cycle or 10% @ 10% Duty Cycle
3. -PD PWM dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.

-PD 2-Wire PWM Positive Dimming Scheme

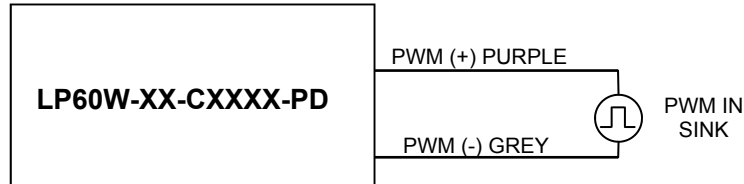

% Output Current vs. 1.0 kHz, Positive Duty Cycle Dimming Input

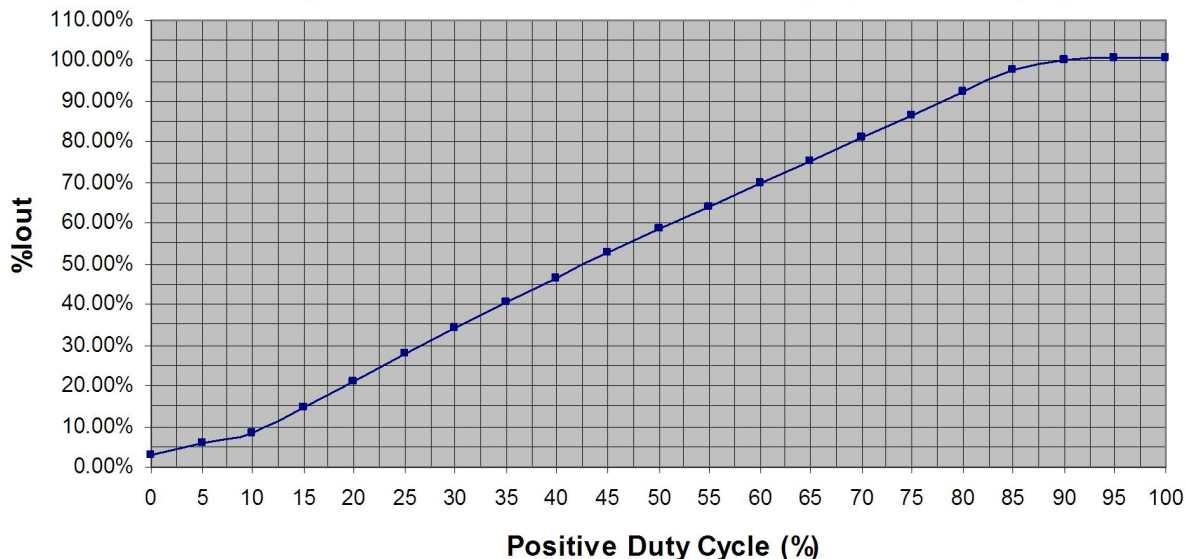

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LP60W Series
60W

Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	90 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.57 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.32 A	Measured at 230Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	42A	50A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% I _{peak} duration \approx 750 μ sec (1/2*I _p ² *t)
Inrush Current (I ² t)	—	—	0.94 A ² s	
THD	—	—	20%	Measured at 120, 230, 277Vac Input, Output \geq 75% Load
Power Factor (PF)	0.90	—	—	Measured at 120, 230, 277Vac Input, Output \geq 75% Load

Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 1
DC Output Constant Current	-3%	Per Table	+3%	Per Tables on Page 1
Output Power	—	—	Per Table	Per Tables on Page 1
Ripple & Noise (V _{pk-pk})	—	—	5% V _o	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic.
Ripple (I _{pk-pk})	—	—	5% I _o	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic. 120 Hz component (Flicker Free)
Start-up Time	—	200 mS	1000 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	40 mS	—	Typical @ 277Vac Input, Output Full load.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (T _c)	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (T _a)	-30 °C	—	+60 °C	This is a reference range. T _c controls temperature range.
Storage Temperature (T _s)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	474,000 Hours	—	—	MIL-HDBK-217F Notice 2, T _a = 25C, Output Full Load.

Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% I _o	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% V _o	No Damage, Auto recovery after fault is removed.

60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Safety Certification


Safety	Notes/Standards
UL/CUL	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL & UL Type TL UL Class 2 86/63°C, UL Non-Class 2 90/81°C
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac. Parts use a GDT. Hipot cannot be done with Case or GND connected.
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
0-10V Dimming Circuit	Dim+ Purple/Dim- Gray are considered part of the secondary circuit.

EMC Certification

Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

Power Factor Curves (Typical)

PF vs. Output Power

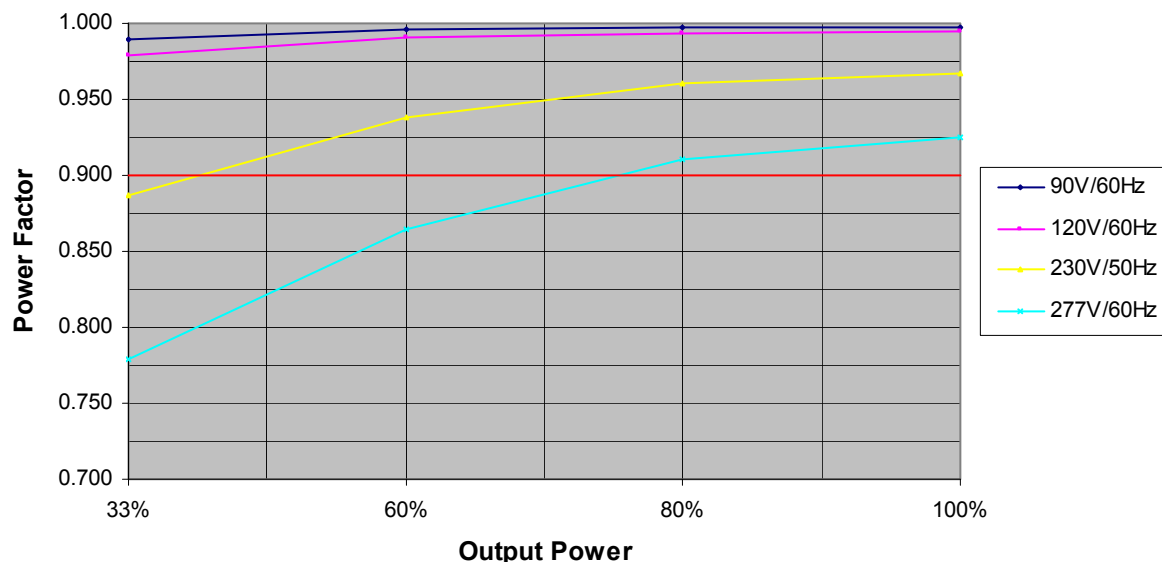


60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LP60W Series
60W


THD Curves (Typical)

THD vs. Output Power

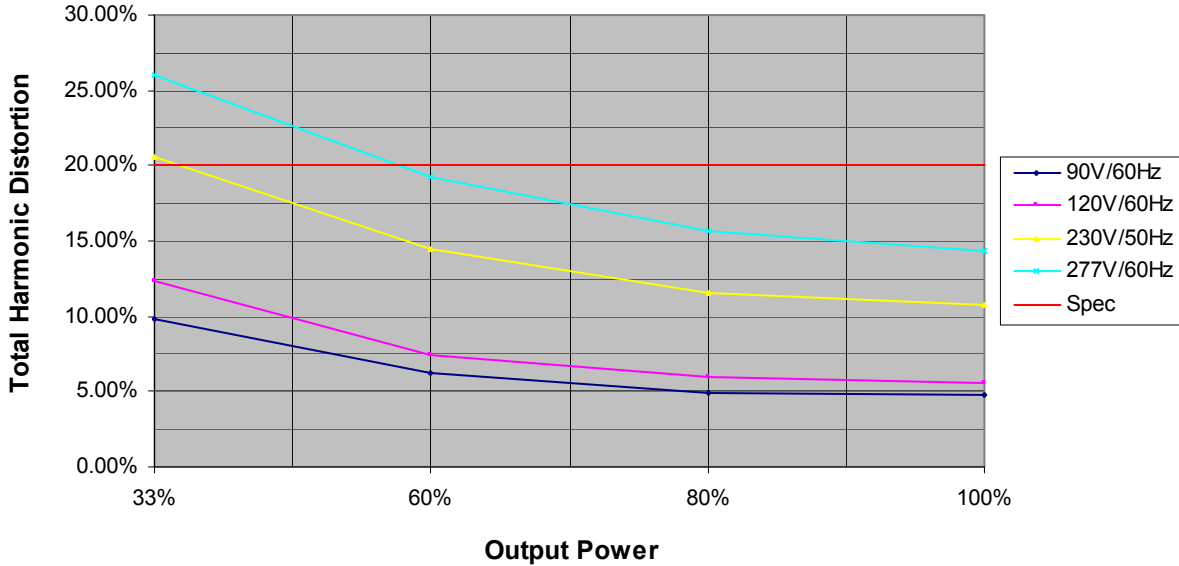

Efficiency Curve (Typical) LD40W-36-C1100-RD

Efficiency vs. Output Power

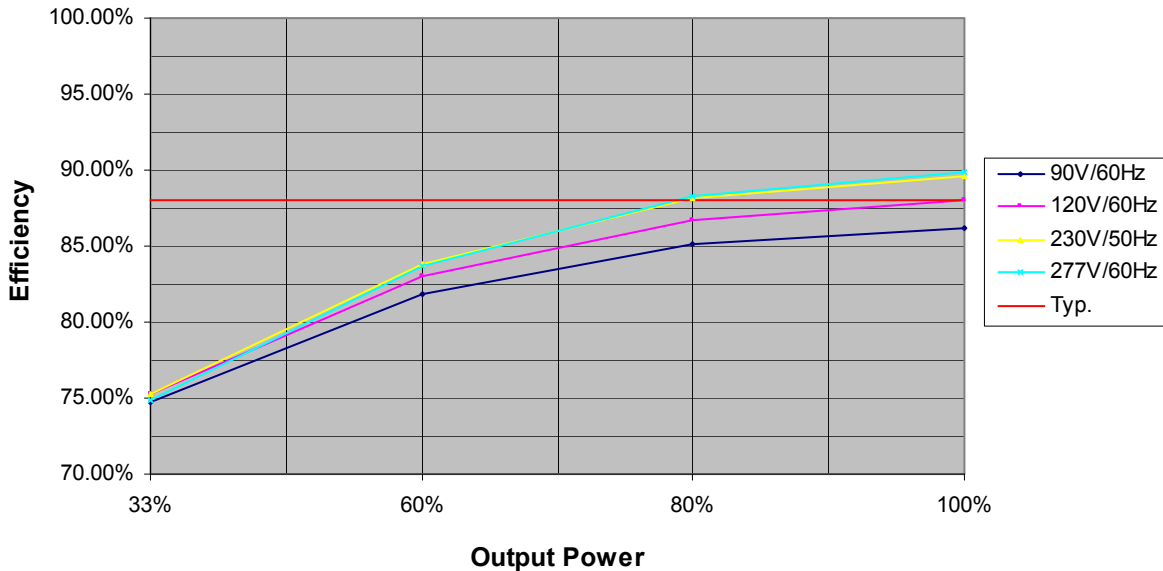


60 Watt - LP60W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Life vs. Ambient Temperature

LP60W Estimated Life Full Load @ 120Vac

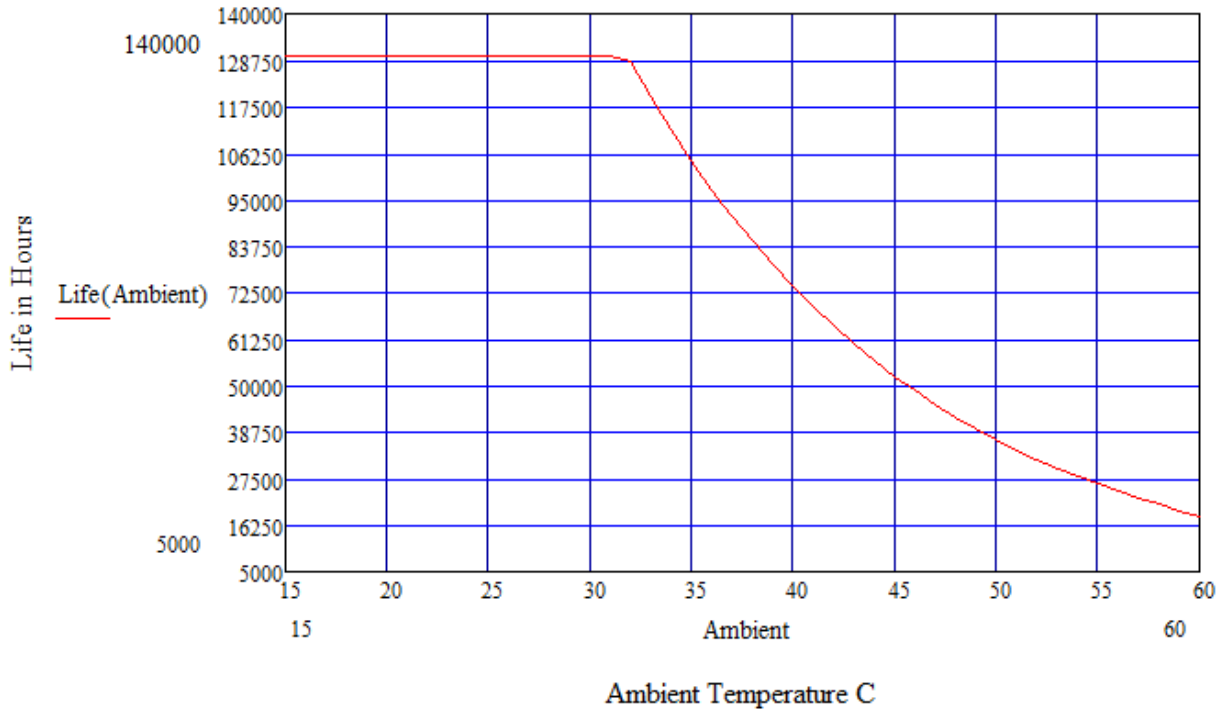

Life vs. Case (Tc) Temperature

LP60W Estimated Life Full Load @ 120Vac

